





FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = BROWN 2 = N/C 3 = N/C 4 = BLUE 	 1 = N/C 2 = N/C 3 = BLUE 4 = BROWN 		CONTACT CARRIER MATERIAL	TPU OR NYLON
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	250 V
			OUTER CABLE JACKET MATERIAL/COLOR	PVC/GREY
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	2x20 AWG
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

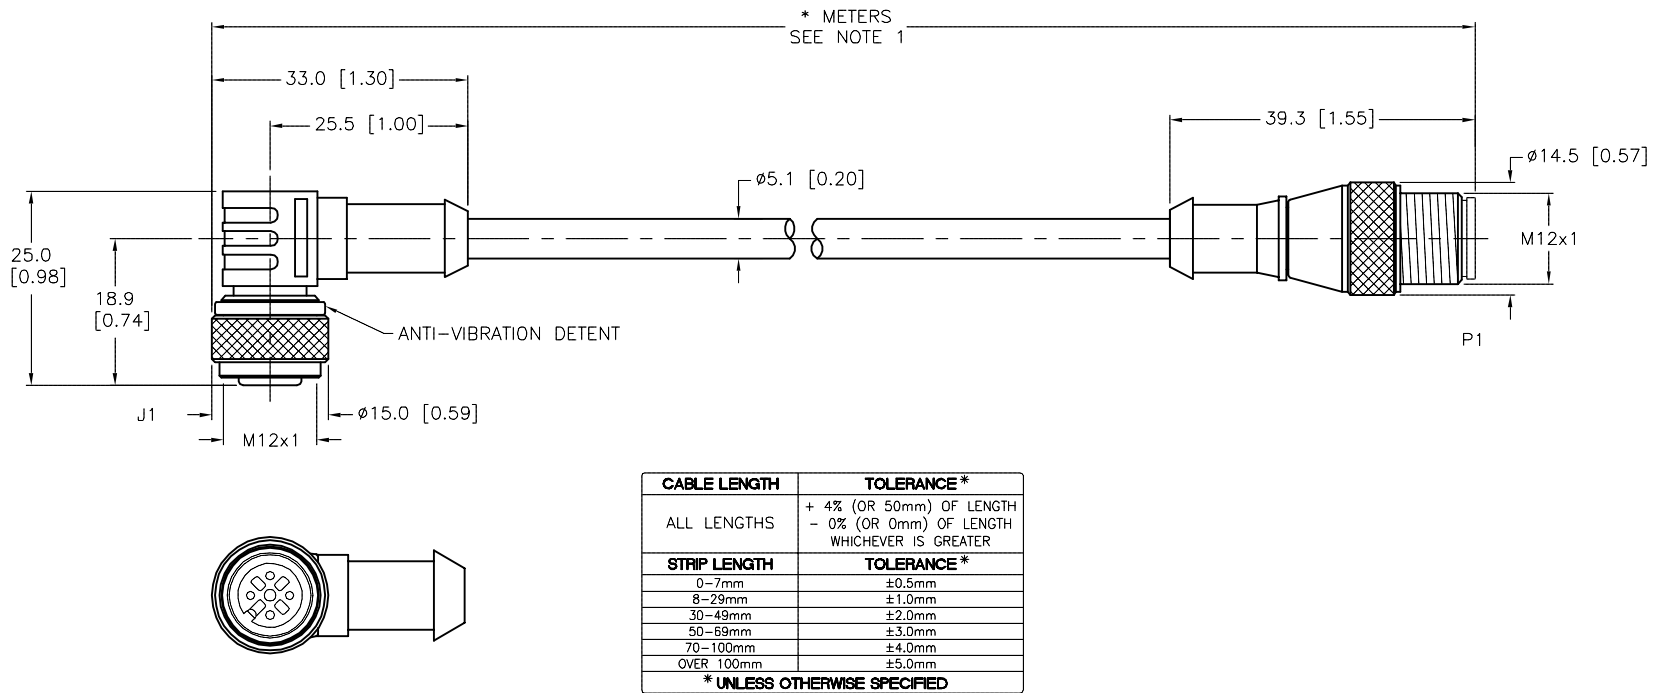


SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/CS10546" DESIGNATES CUSTOM WIRING.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. 		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1.							
2.							
3.							
4.							
MATERIAL		DRFT TR		DATE 01/16/13		DESCRIPTION	
SEE SPECIFICATIONS		APVD J.S.		SCALE 1=1.0		WK 4.23T-*--RS 4.23T/CS10546	
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS						A	
		DO NOT SCALE THIS DRAWING		FILE: 777030409		SHEET 1 OF 1	

A	DRAWING RELEASE	RDS	01/24/13	
REV	DESCRIPTION	BY	DATE	ECO NO.