




MALE END VIEW	FEMALE END VIEW	SPECIFICATIONS																							
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK	 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK	<table><tr><td>CONTACT CARRIER MATERIAL</td><td>TPV</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPV/WHITE</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/FINISH</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>RATED CURRENT [A]</td><td>9.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>300 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPV/WHITE</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>POLYESTER ELASTOMER</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x18 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	TPV	MOLDED HEAD MATERIAL/COLOR	TPV/WHITE	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	RATED CURRENT [A]	9.0 A	RATED VOLTAGE [V]	300 V	OUTER JACKET MATERIAL/COLOR	TPV/WHITE	CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER	NUMBER OF CONDUCTORS [AWG]	4x18 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	
CONTACT CARRIER MATERIAL	TPV																								
MOLDED HEAD MATERIAL/COLOR	TPV/WHITE																								
CONTACT MATERIAL/PLATING	BRASS/GOLD																								
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED																								
RATED CURRENT [A]	9.0 A																								
RATED VOLTAGE [V]	300 V																								
OUTER JACKET MATERIAL/COLOR	TPV/WHITE																								
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER																								
NUMBER OF CONDUCTORS [AWG]	4x18 AWG																								
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																								
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																								
																									

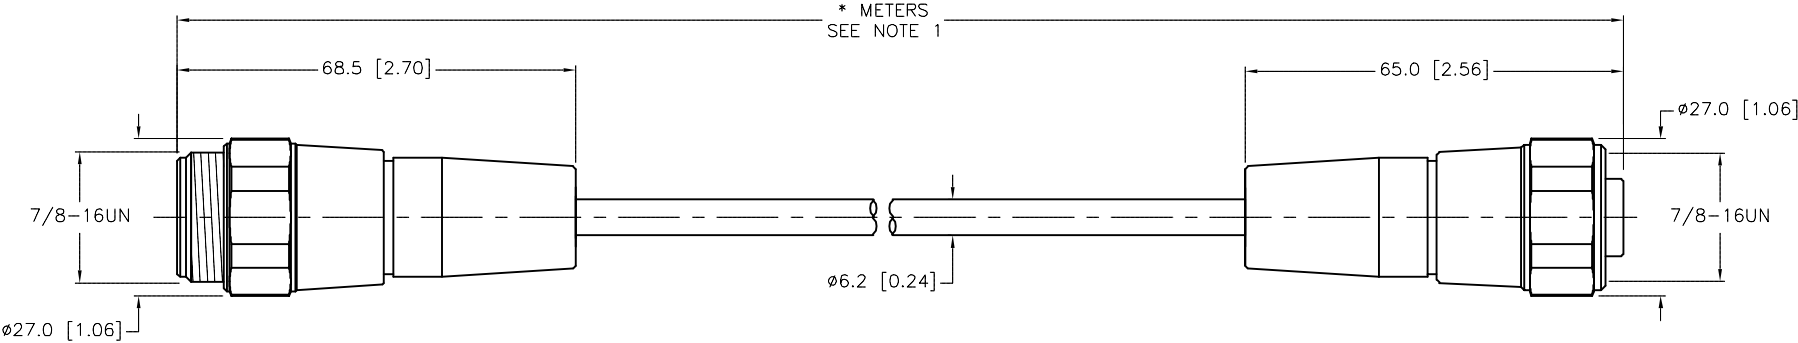

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

50-69mm±3.0mm 70-100mm±4.0mm OVER 100mm±5.0mm *UNLESS OTHERWISE SPECIFIED					RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					MATERIAL SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS DATE 10/30/12		DESCRIPTION WD-RSV RKV 40-*M	
					FINISH SEE SPECIFICATIONS				APVD E.S. SCALE 1=1.3			
					C UPDATE MATERIAL SPECIFICATIONS		NF	07/21/15	50671	UNIT OF MEASUREMENT MILLIMETER [INCH]		
REV DESCRIPTION		BY	DATE	ECO NO.	CONTACT TURCK FOR MORE INFORMATION DO NOT SCALE THIS DRAWING				FILE: 777030696		SHEET 1 OF 1	