



FEMALE END VIEW		SPECIFICATIONS	
	1 = WHITE	CONTACT CARRIER MATERIAL	NYLON or TPU
	2 = BROWN	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
	3 = GREEN	CONTACT MATERIAL/PLATING	BRASS/GOLD
	4 = YELLOW	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
	5 = GREY	RATED CURRENT [A]	2.0 A
	6 = PINK	RATED VOLTAGE [V]	30 V
	7 = BLUE	OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW
	8 = RED	CONDUCTOR INSULATION MATERIAL	PVC
	9 = ORANGE	NUMBER OF CONDUCTORS [AWG]	12x22 AWG
	10 = TAN	DRAIN/SHIELD	24 AWG/ALUM.-POLYESTER FOIL & T-C BRAIDED
	11 = BLACK	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
	12 = VIOLET	PROTECTION CLASS	MEETS IEC IP67

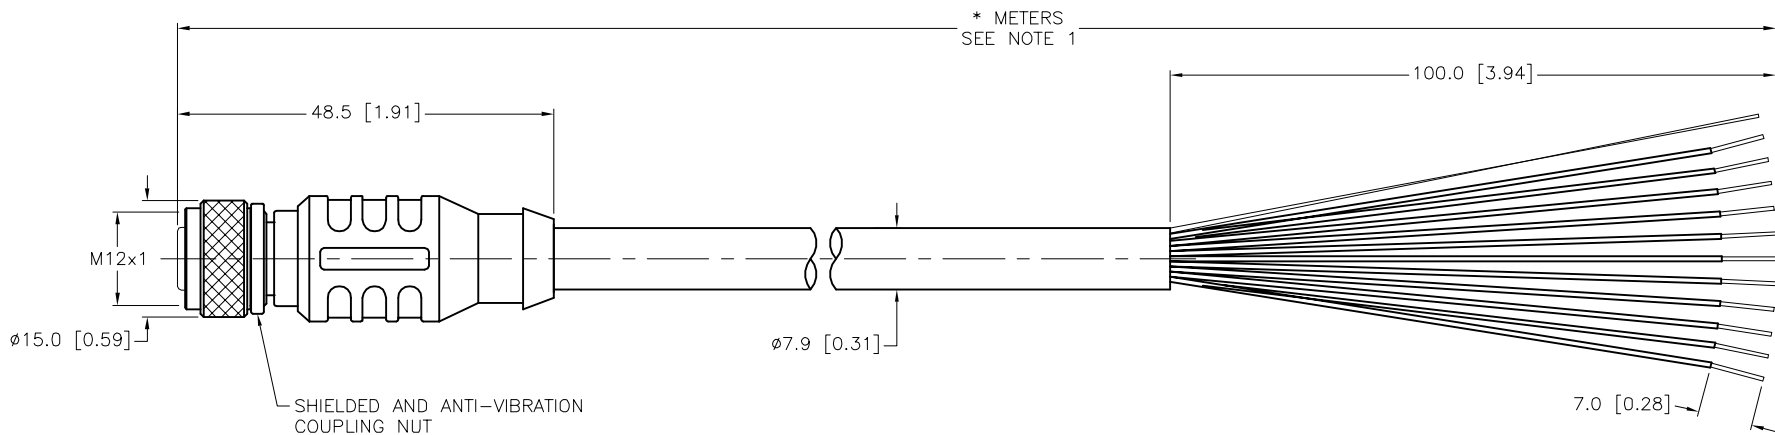


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S715" DESIGNATES YELLOW CABLE JACKET.
- "/S849" DESIGNATES 22 AWG CONDUTORS.

B	UPDATE VOLTAGE RATING	CBM	02/21/23	78300
REV	DESCRIPTION	BY	DATE	ECO. NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT RDS		DATE 01/10/13	
MATERIAL		SEE SPECIFICATIONS		APVD L.M.		SCALE 1=1.0	
FINISH		SEE SPECIFICATIONS		UNIT OF MEASUREMENT		DESCRIPTION	
				MILLIMETER [INCH]		RKS 12T-*/S715/S849	
				CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.	
				DO NOT SCALE THIS DRAWING		REV	
						B	
						FILE: 777030966	
						SHEET 1 OF 1	