




MALE END VIEW		FEMALE END VIEW	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	TPU
PAIR [1 = BLUE (- VOLTAGE) 2 = BROWN (+ VOLTAGE) 3 = BARE (SHIELD) 4 = GREEN/YELLOW (GROUND)		PAIR [1 = BLUE (- VOLTAGE) 2 = BROWN (+ VOLTAGE) 3 = BARE (SHIELD) 4 = GREEN/YELLOW (GROUND)	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
FOUNDATION™ fieldbus		FOUNDATION™ fieldbus	CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	9.0 A
			RATED VOLTAGE [V]	600 V
			OUTER JACKET MATERIAL/COLOR	EX60/YELLOW
			CONDUCTOR INSULATION MATERIAL	XLPE
			NUMBER OF CONDUCTORS [AWG]	3x18 AWG, 20 AWG DRAIN
			SHIELDING	ALUM./POLYESTER FOIL
			CONDUCTOR ARRANGEMENT	1 SHIELDED TWISTED PAIR, 1 GND, 1 DRAIN
			TEMPERATURE RATING	-60°C to +105°C (-76°F to +221°F)
			PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K

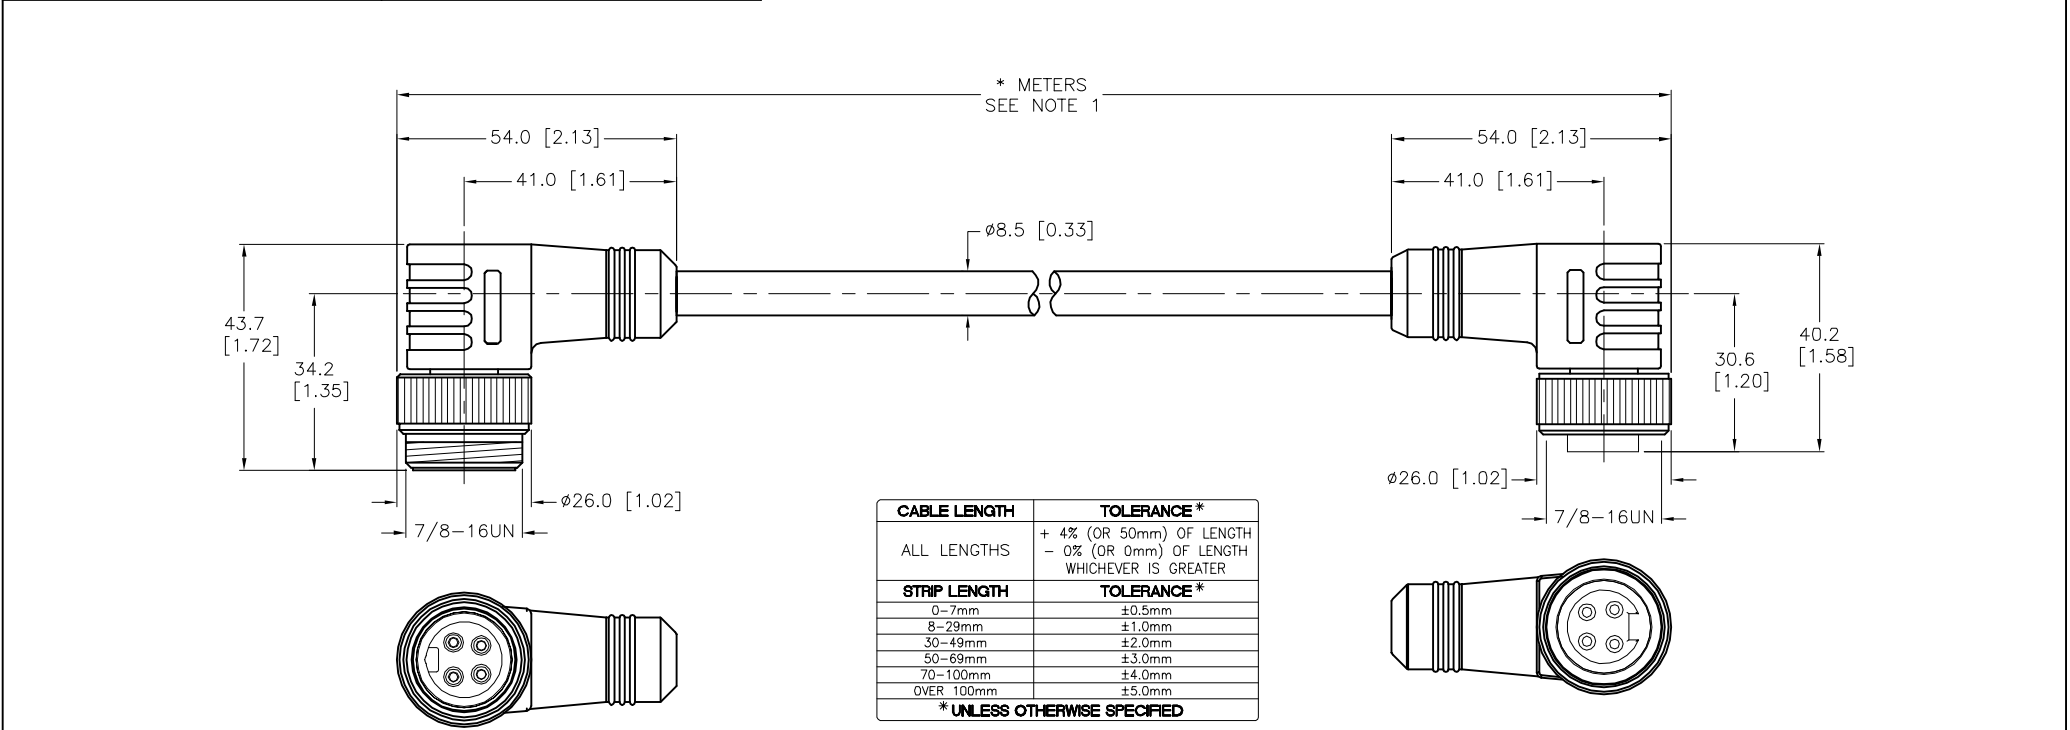

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

NOTES: 1. "M" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
					1. 2. 3. 4.							
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY					
					FINISH							
DRFT		RDS		DATE 01/23/13		DESCRIPTION WSV WKV 4912-M						
APVD		E.S.		SCALE 1=1.5								
		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV E				
DO NOT SCALE THIS DRAWING						FILE: 777031012		SHEET 1 OF 1				
E	UPDATE PROTECTION CLASS			CBM	04/13/21	76628						
REV	DESCRIPTION			BY	DATE	ECO NO.						