



VALVE END VIEW




1 = BLACK#1
2 = BLACK#2
3 = BLACK#3
4 = BLACK#4 (INTERNAL)
GND = GREEN/YELLOW

WIRING DIAGRAM

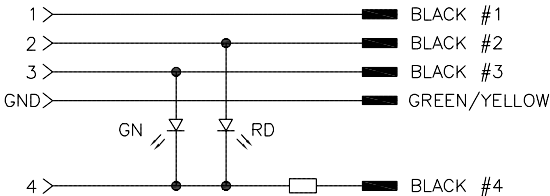

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON OR TPU
CONTACT MATERIAL/PLATING	BRASS/SILVER
MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLACK
RATED CURRENT	4.0 A
RATED VOLTAGE	24 VDC
OUTER JACKET MATERIAL/COLOR	TPU/GRAY
NUMBER OF CONDUCTORS	5x18 AWG
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

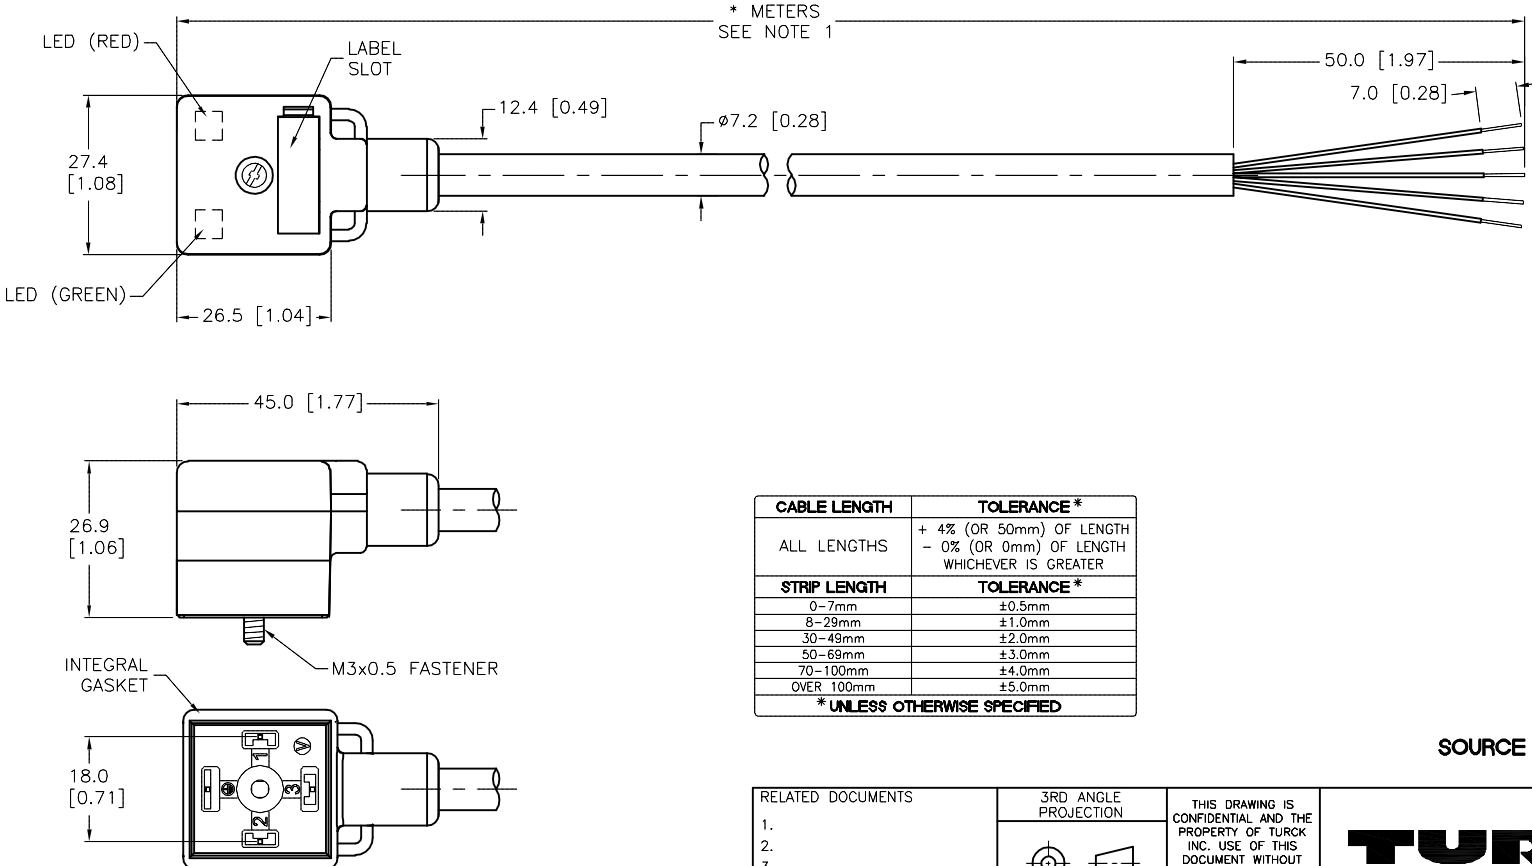

LED (RED)

LABEL SLOT

27.4 [1.08]

26.5 [1.04]

LED (GREEN)

12.4 [0.49]

7.0 [0.28]

50.0 [1.97]

7.0 [0.28]

45.0 [1.77]

26.9 [1.06]

18.0 [0.71]

M3x0.5 FASTENER

INTEGRAL GASKET

* METERS
SEE NOTE 1

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED


NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RDS

APVD T.S.

DATE 10/14/13

SCALE 1=1.3

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

SEE SPECIFICATIONS

SEE SPECIFICATIONS

CONTACT TURCK FOR MORE INFORMATION

DESCRIPTION

VAS 4-K2007-*M

IDENTIFICATION NO.

777031020

REV

B

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

B	UPDATE WIRING	NF	11/24/15	52492
REV	DESCRIPTION	BY	DATE	ECO NO.