


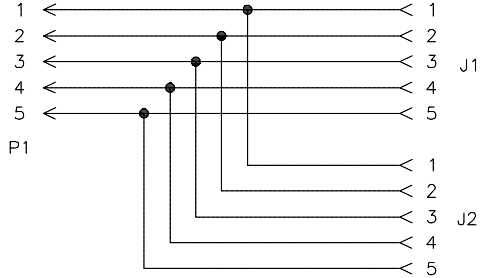


MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS		
			CONTACT CARRIER MATERIAL	NYLON OR TPU	
			MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY	
			CONTACT MATERIAL/PLATING	BRASS/GOLD	
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	
			RATED CURRENT [A]	4.0 A	
			RATED VOLTAGE [V]	250 V	
			OUTER JACKET MATERIAL/COLOR	PVC/GRAY	
			CONDUCTOR INSULATION MATERIAL	PVC	
			NUMBER OF CONDUCTOR [AWG]	5x22 AWG	
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	
			PROTECTION CLASS	IEC IP67	

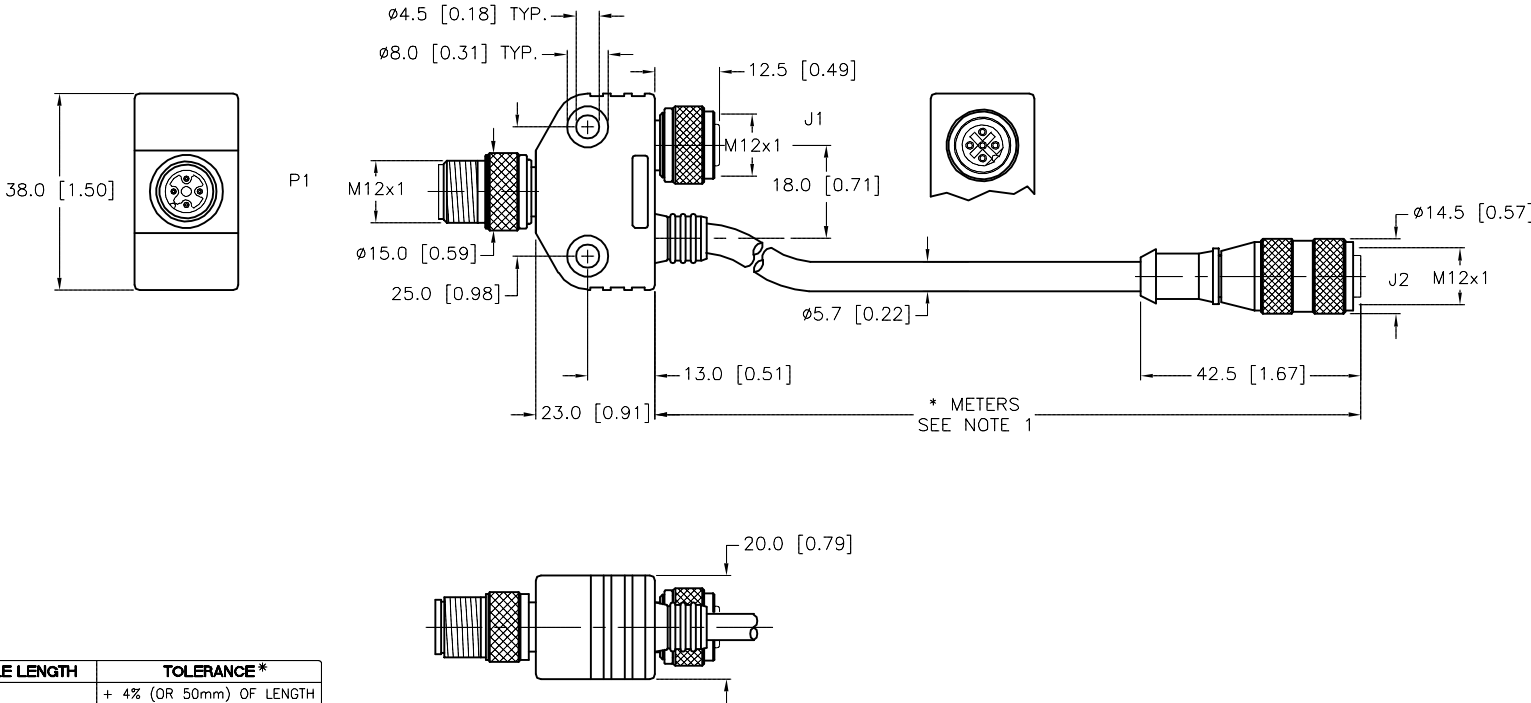


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

- NOTES:
- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/S651" DESIGNATES PARALLEL WIRED.
 - "/S679" DESIGNATES BLUE-GRAY MOLD BODY.

D	UPDATE MALE COUPLING NUT	ER	04/23/18	56902
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	KMY	DATE	01/30/13		
SEE SPECIFICATIONS		APVD	T.S.	SCALE	1 = 1.5		
		UNIT OF MEASUREMENT			DESCRIPTION VB2-FSM4.5/FKM4.5/RK4.5T-*/S651/S679		
		MILLIMETER [INCH]					
		FINISH	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING			IDENTIFICATION NO.
SEE SPECIFICATIONS	FILE: 777031092						D