




SPECIFICATIONS	
CONTACT CARRIER MATERIAL	TPU
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	8.0 A
RATED VOLTAGE [V]	600 V
OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLUE
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
NUMBER OF CONDUCTORS [AWG]	6x16 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K
CABLE RATINGS	UL: ITC-ER/PLTC-ER, DIRECT BURIAL, 105C CSA: CIC 90C 600V C(UL) 245/1309 MARINE SHIPBOARD & IEEE 1580


MALE END VIEW	FEMALE END VIEW
 3 (LONG) 4 2 1 5 6 1 = WHITE 2 = RED 3 = GREEN/YELLOW 4 = ORANGE 5 = BLACK 6 = BLUE 	 3 2 4 1 5 6 1 = WHITE 2 = RED 3 = GREEN/YELLOW 4 = ORANGE 5 = BLACK 6 = BLUE 

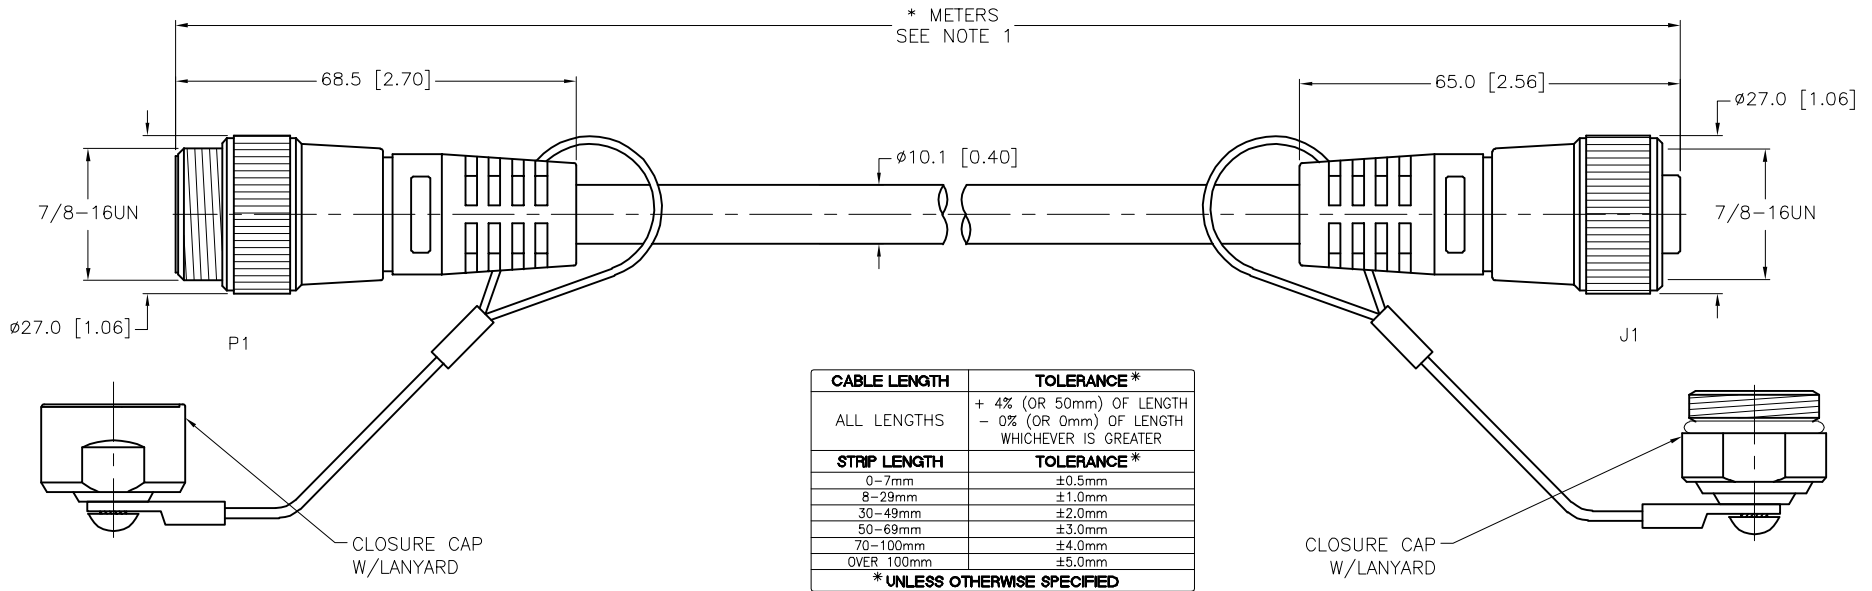

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S1599" DESIGNATES ATTACHED MATING CLOSURE CAPS TO CORDSET END.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
							
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	02/19/13	DESCRIPTION P-RSV RKV 63-1909-*M/S1599	
APVD		T.S.	SCALE	1=1.3			
SEE SPECIFICATIONS		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.	
FINISH		CONTACT TURCK FOR MORE INFORMATION					
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING				FILE: 777031124	
						SHEET 1 OF 1	