

FEMALE	END VIEW
19 7 16 6 15 5 4 17 5 4 17 6 6 9 3 14 9 9 1 9 2 1 3 13 13 13 13 13 13 13 13 13 13 13 13	1 = WHITE/BLACK 2 = BLACK/WHITE 3 = WHITE/GREEN 4 = GREEN/WHITE 5 = GRAY 6 = WHITE/RED 7 = N/C 8 = RED/WHITE 9 = WHITE/ORANGE 10 = ORANGE WHITE 11 = WHITE/BLUE 12 = GREEN/YELLOW 13 = BLUE/WHITE 14 = WHITE/BROWN 15 = BROWN/WHITE 16 = WHITE/YELLOW 17 = YELLOW/WHITE 18 = WHITE/VIOLET
	19 = VIOLET/WHITE

SPECIFICATIONS			
CONTACT CARRIER MATERIAL	TPU		
CONTACT MATERIAL/PLATING	BRASS/GOLD		
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED		
RATED CURRENT [A]	4.0 A (PINS 5,7,12), 2.0 A (ALL OTHERS)		
RATED VOLTAGE [V]	300 V		
CONDUCTOR INSULATION MATERIAL	PVC		
NUMBER OF CONDUCTORS	16x22 AWG, 2x18 AWG		
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)		
PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K		



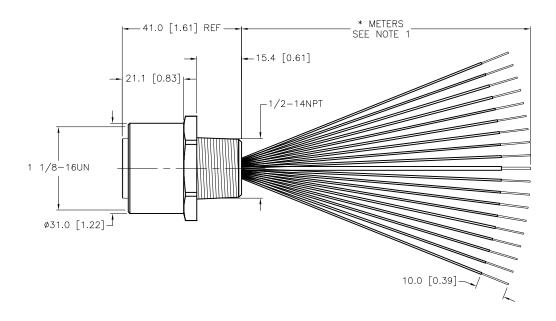

CABLE LENGTH	TOLERANCE *				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER TOLERANCE *				
STRIP LENGTH					
0-7mm	±0.5mm				
8-29mm	±1.0mm ±2.0mm				
30-49mm					
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNLESS OTHERWISE SPECIFIED					

NOTES:

REV DESCRIPTION

D UPDATE PROTECTION CLASS

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

CBM 04/13/21

DATE

76628

ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY

	RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		rck	3000 CAMPUS MINNEAPOLIS, MN 1-800-544- (763) 553-7 (763) 553-0 www.turck.u	N 55441 7769 7300 1708 fax
1	MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR	APVD C.K.	DATE 11/14/12 SCALE 1=1.3	DESCRIPTION P-RKFV 190-	-*/14.5/NPT	-
-	FINISH SEE SPECIFICATIONS	REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV
			DO NOT SCALE	THIS DRAWING	FILE: 777031380	SHEET	1 OF 1