


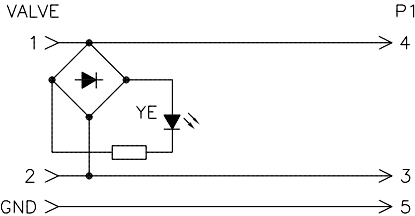
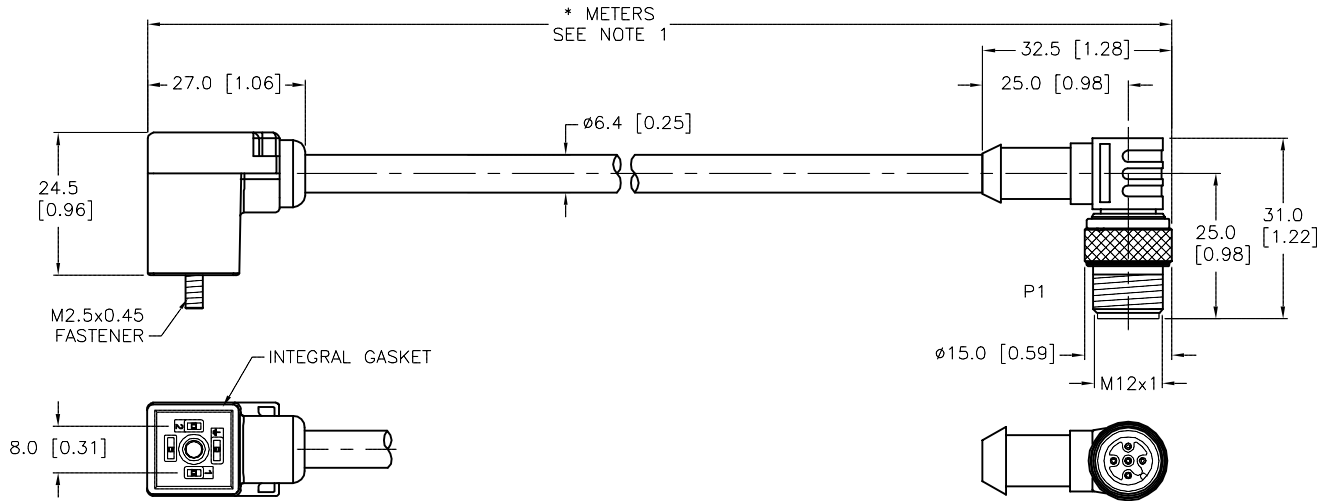



VALVE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = BLACK #1 2 = BLACK #2 GND = GREEN/YELLOW	 1 = N/C 2 = N/C 3 = BLACK #2 4 = BLACK #1 5 = GREEN/YELLOW 		CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/BLACK (VALVE), YELLOW (P1)
			CONTACT MATERIAL/PLATING (VALVE)	BRASS/SILVER
			CONTACT MATERIAL/PLATING (P1)	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	24 VAC/VDC
			OUTER CABLE JACKET MATERIAL/COLOR	TPU/GRAY
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	3x18 AWG
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

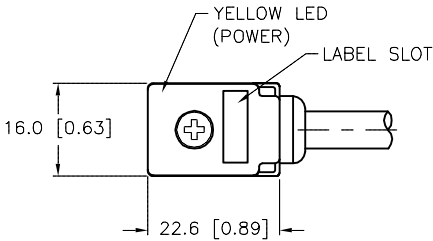

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:
1."*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

NOTES: 1."*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
					1. 2. 3. 4.							
					MATERIAL		DRFT KMY				DATE 04/25/13	
					SEE SPECIFICATIONS		APVD A.A.				SCALE 1 = 1.3	
					FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]				DESCRIPTION TC8S 2-L669-*M-WS 5.3T	
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION										
C	UPDATE COUPLING NUT	RDS	04/19/18	56902					IDENTIFICATION NO.		REV C	
REV	DESCRIPTION	BY	DATE	ECO NO.					DO NOT SCALE THIS DRAWING		FILE: 777031464	SHEET 1 OF 1