


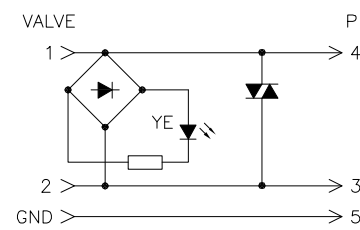
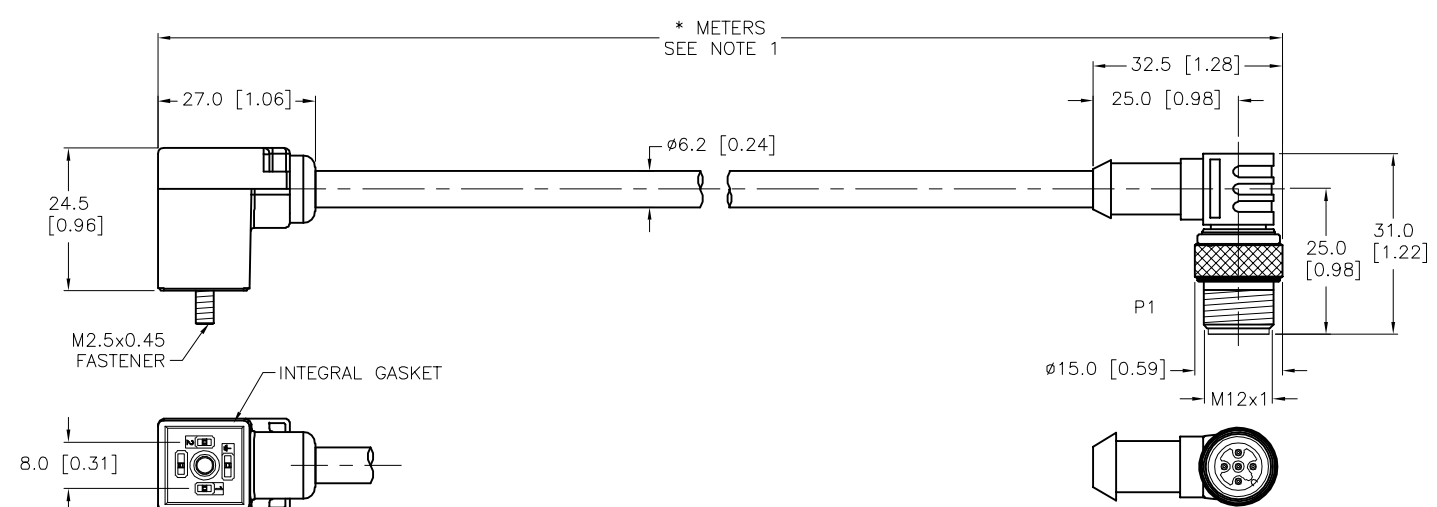


VALVE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = BLACK #1 2 = BLACK #2 GND = GREEN/YELLOW	 1 = N/C 2 = N/C 3 = BLACK #2 4 = BLACK #1 5 = GREEN/YELLOW 		CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLACK (VALVE), YELLOW (P1)
			CONTACT MATERIAL/PLATING (VALVE)	BRASS/SILVER
			CONTACT MATERIAL/PLATING (P1)	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	24 VAC/VDC
			OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	3x18 AWG
			TEMPERATURE RANGE	-40°C to 105°C (-40°F to 221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

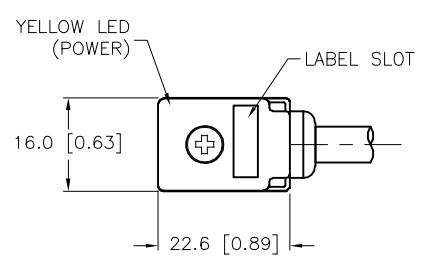

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

C	UPDATE COUPLING NUT	RDS	04/19/18	56902	SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MINNEAPOLIS, MN		C
REV	DESCRIPTION	BY	DATE	ECO NO.					