


VALVE END VIEW



1 = BLACK #1
2 = BLACK #2
GND = GREEN/YELLOW


WIRING DIAGRAM

VALVEP1

1 > 4
2 > 3
GND > 5

N/C → 1
N/C → 2

MALE END VIEW




1 = N/C
2 = N/C
3 = BLACK #2
4 = BLACK #1
5 = GREEN/YELLOW



SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLACK (VALVE), YELLOW (P1)
CONTACT MATERIAL/PLATING	BRASS/SILVER (VALVE), BRASS/GOLD (P1)
COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	0-220 VAC/VDC
OUTER CABLE JACKET MATERIAL/COLOR	TPU/GRAY
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	3x18 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

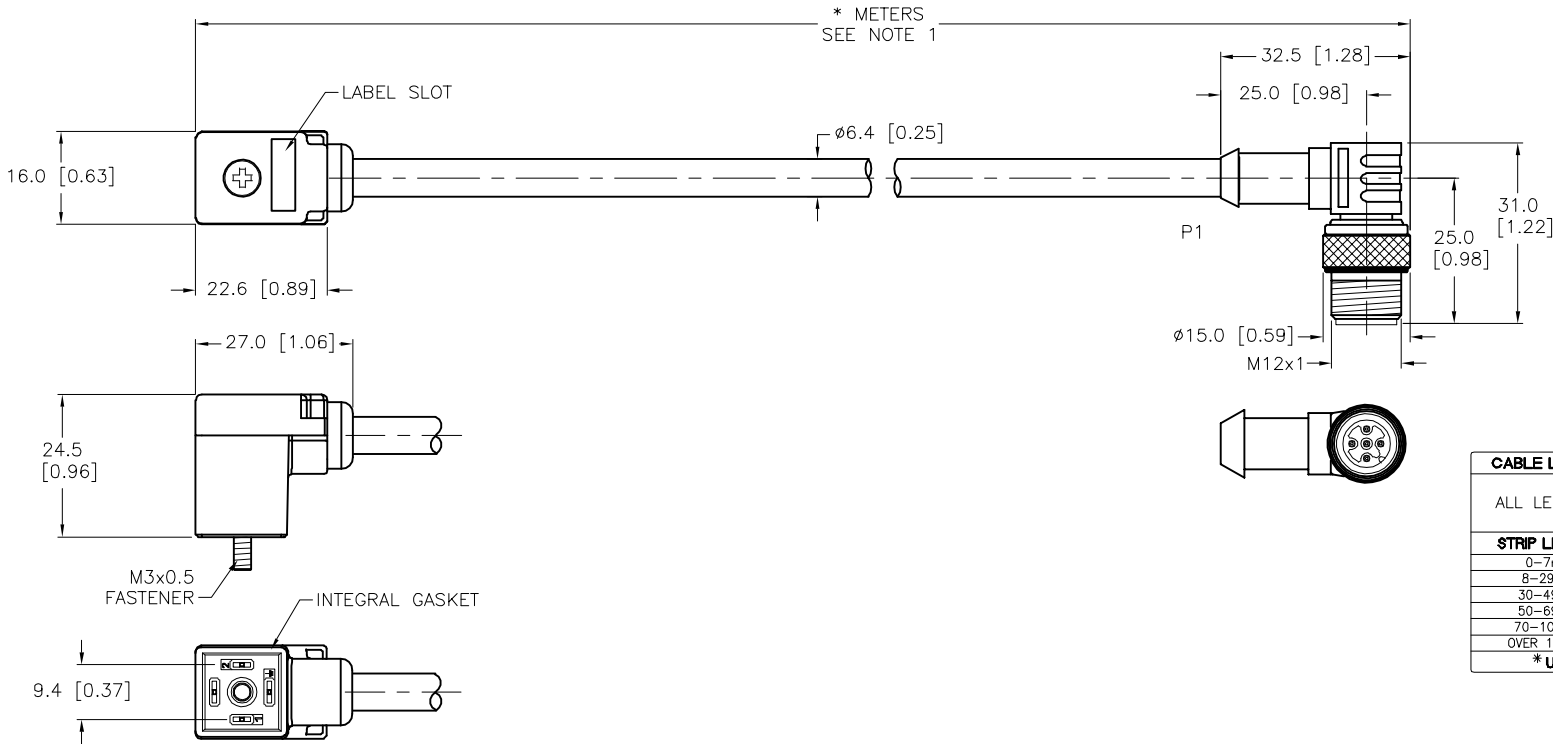

CABLE LENGTH

TOLERANCE*

ALL LENGTHS

+ 4% (OR 50mm) OF LENGTH
- 0% (OR 0mm) OF LENGTH
WHICHEVER IS GREATER

STRIP LENGTH

TOLERANCE*

0-7mm

±0.5mm

8-29mm

±1.0mm

30-49mm

±2.0mm

50-69mm

±3.0mm

70-100mm

±4.0mm

OVER 100mm

±5.0mm

* UNLESS OTHERWISE SPECIFIED

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

1.
2.
3.
4.


MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

3RD ANGLE PROJECTION



ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RDS
APVD A.A.

DATE 04/25/13
SCALE 1=1.3

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

TURCK

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

DESCRIPTION
TC9S 2-A669-*M-WS 5.3T

IDENTIFICATION NO.

REV
B

B UPDATE MALE COUPLING NUT

NF 04/19/18 56902

REV DESCRIPTION

BY DATE ECO NO.

FILE: 777031520

SHEET 1 OF 1