


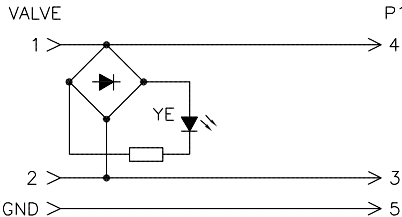
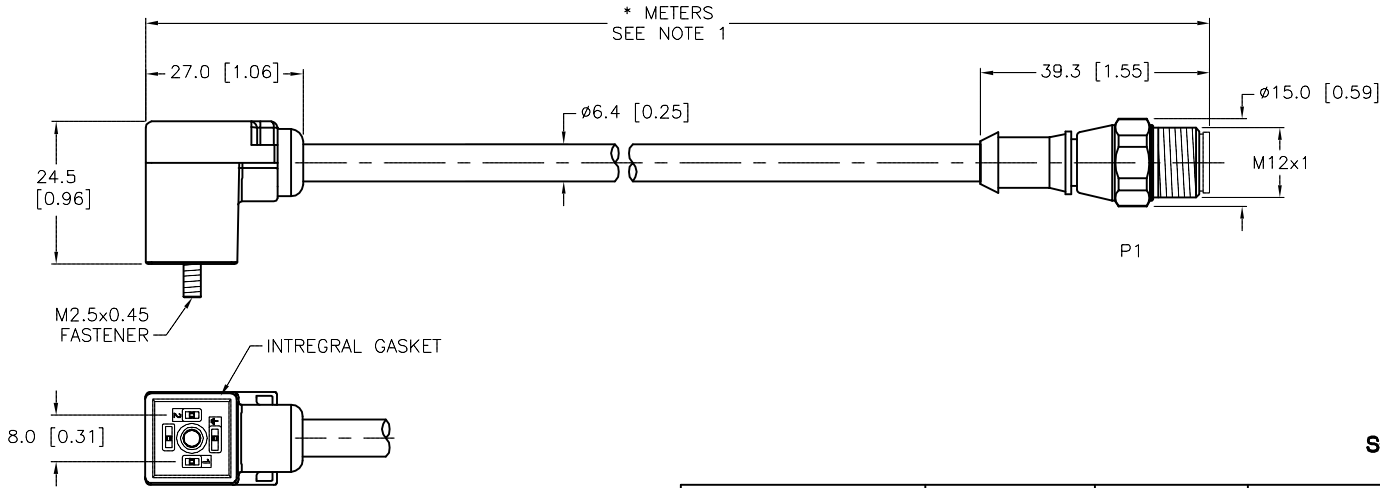
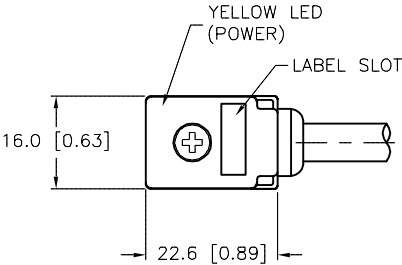


VALVE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS																								
 1 = BLACK #1 2 = BLACK #2 GND = GREEN/YELLOW	 1 = N/C 2 = N/C 3 = BLACK #2 4 = BLACK #1 5 = GREEN/YELLOW 		<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/TRANSLUCENT BLACK (VALVE), YELLOW (P1)</td></tr><tr><td>CONTACT MATERIAL/PLATING (VALVE)</td><td>BRASS/SILVER</td></tr><tr><td>CONTACT MATERIAL/PLATING (P1)</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/FINISH (P1)</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>24 VAC/VDC</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>TPU/GRAY</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>3x18 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLACK (VALVE), YELLOW (P1)	CONTACT MATERIAL/PLATING (VALVE)	BRASS/SILVER	CONTACT MATERIAL/PLATING (P1)	BRASS/GOLD	COUPLING NUT MATERIAL/FINISH (P1)	STAINLESS STEEL/PASSIVATED	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	24 VAC/VDC	OUTER CABLE JACKET MATERIAL/COLOR	TPU/GRAY	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	3x18 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
CONTACT CARRIER MATERIAL	NYLON OR TPU																										
MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLACK (VALVE), YELLOW (P1)																										
CONTACT MATERIAL/PLATING (VALVE)	BRASS/SILVER																										
CONTACT MATERIAL/PLATING (P1)	BRASS/GOLD																										
COUPLING NUT MATERIAL/FINISH (P1)	STAINLESS STEEL/PASSIVATED																										
RATED CURRENT [A]	4.0 A																										
RATED VOLTAGE [V]	24 VAC/VDC																										
OUTER CABLE JACKET MATERIAL/COLOR	TPU/GRAY																										
CONDUCTOR INSULATION MATERIAL	PVC																										
NUMBER OF CONDUCTORS [AWG]	3x18 AWG																										
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																										
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																										



CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.	RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
	1. 2. 3. 4.											
	MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT KMY		DATE 04/25/13		DESCRIPTION TC8S 2-L669-*M-RSV 5.3T	
	SEE SPECIFICATIONS						APVD A.A.		SCALE 1=1.3			
FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV B		
SEE SPECIFICATIONS												
B	UPDATE SCREW CALLOUT			RDS	06/20/13	42612						
REV	DESCRIPTION			BY	DATE	ECO NO.	DO NOT SCALE THIS DRAWING		FILE: 777031523		SHEET 1 OF 1	