


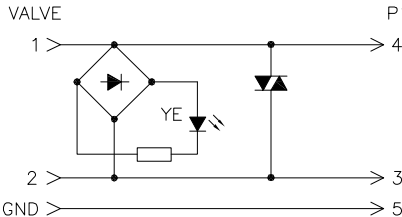


VALVE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS																								
 1 = RED/BLACK 2 = RED/WHITE GND = GREEN/YELLOW	 1 = N/C 2 = N/C 3 = RED/WHITE 4 = RED/BLACK 5 = GREEN/YELLOW 		<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/TRANSLUCENT BLACK (VALVE), YELLOW (P1)</td></tr><tr><td>CONTACT MATERIAL/PLATING (VALVE)</td><td>BRASS/SILVER</td></tr><tr><td>CONTACT MATERIAL/PLATING (P1)</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING (P1)</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>24 VDC</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>TPE/YELLOW</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>3x18 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to 105°C (-40°F to 221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLACK (VALVE), YELLOW (P1)	CONTACT MATERIAL/PLATING (VALVE)	BRASS/SILVER	CONTACT MATERIAL/PLATING (P1)	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	24 VDC	OUTER CABLE JACKET MATERIAL/COLOR	TPE/YELLOW	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	3x18 AWG	TEMPERATURE RANGE	-40°C to 105°C (-40°F to 221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
CONTACT CARRIER MATERIAL	NYLON OR TPU																										
MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLACK (VALVE), YELLOW (P1)																										
CONTACT MATERIAL/PLATING (VALVE)	BRASS/SILVER																										
CONTACT MATERIAL/PLATING (P1)	BRASS/GOLD																										
COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL																										
RATED CURRENT [A]	4.0 A																										
RATED VOLTAGE [V]	24 VDC																										
OUTER CABLE JACKET MATERIAL/COLOR	TPE/YELLOW																										
CONDUCTOR INSULATION MATERIAL	PVC																										
NUMBER OF CONDUCTORS [AWG]	3x18 AWG																										
TEMPERATURE RANGE	-40°C to 105°C (-40°F to 221°F)																										
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																										

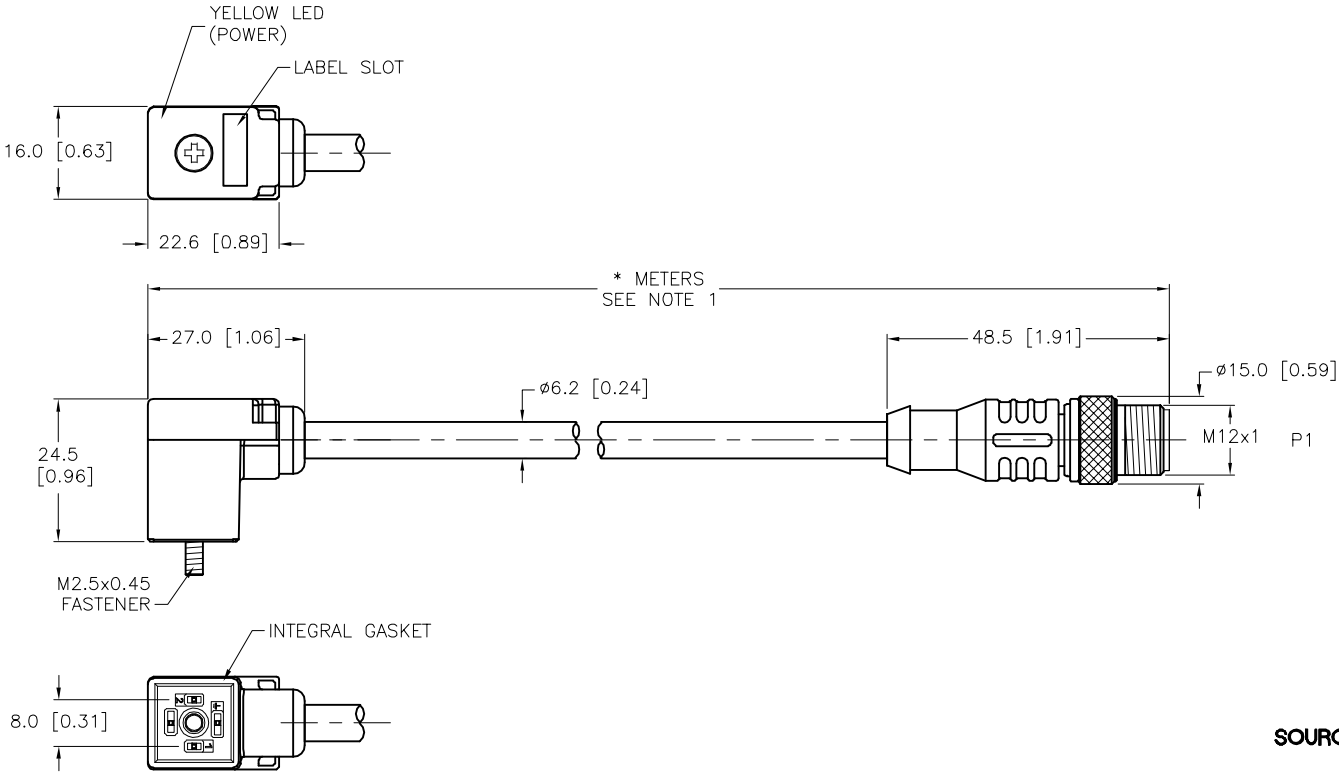


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

C	UPDATE CONDUCTOR COLOR	NF	09/01/17	60785
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
					
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT KMY	DATE 04/25/13	DESCRIPTION TC8S 2-P957-*M-RSC 5.3T	
		APVD A.A.	SCALE 1=1.3		
FINISH SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
				REV C	
		FILE: 777031524		SHEET 1 OF 1	