


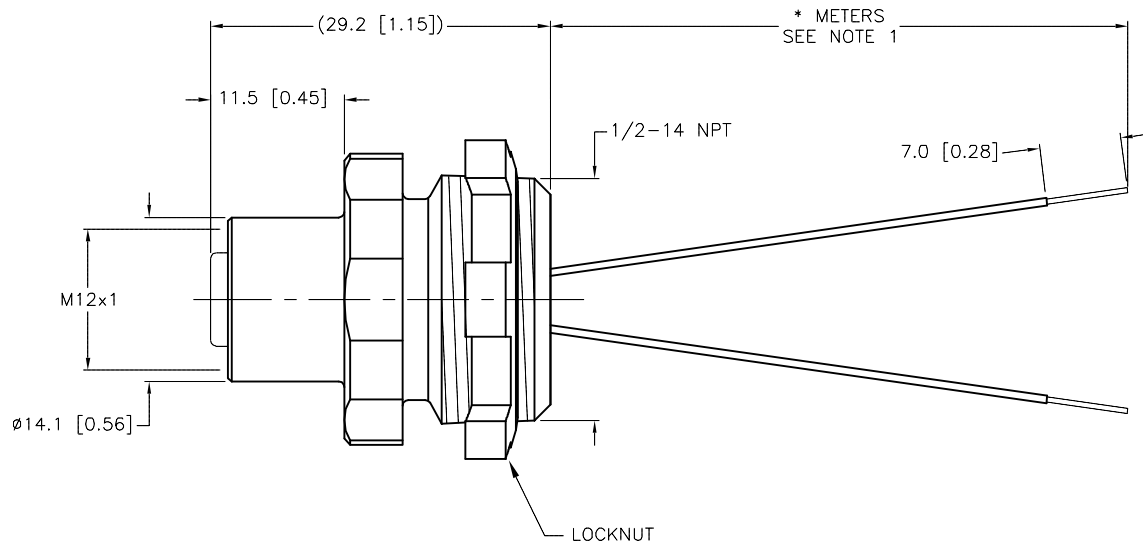


FEMALE END VIEW		LOCKNUT		SPECIFICATIONS	
 1=BROWN 2=N/C 3=BLUE 4=N/C		 Ø28.6 [1.13] REF. 1/2" THREAD		CONTACT CARRIER MATERIAL	NYLON OR TPU
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				RATED CURRENT [A]	4.0 A
				RATED VOLTAGE [V]	250 V
				HOUSING MATERIAL/PLATING	BRASS/NICKEL
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	2x22 AWG
				TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

KEYWAY ORIENTATION MAY VARY FROM WHAT IS SHOWN

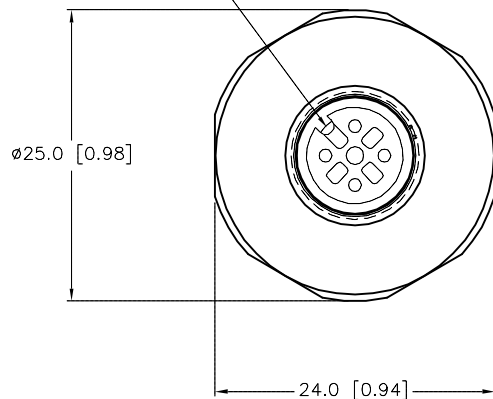


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "W/LN" DESIGNATES LOCKNUT INCLUDED WITH RECEPTACLE.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK INC <i>High Technology Sensors and Automation Controls</i>		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com				
1.										
2.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		KMY	DATE	05/20/13	DESCRIPTION FK 4.22-* / 14.5/NPT W/LN	
3.				APVD		T.S.	SCALE	1 = .7		
4.		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]					IDENTIFICATION NO.	REV A
				DO NOT SCALE THIS DRAWING						
MATERIAL		SEE SPECIFICATIONS		FILE: 777031799					SHEET 1 OF 1	
FINISH		SEE SPECIFICATIONS								

A	DRAWING RELEASE	TR	05/28/13	
REV	DESCRIPTION	BY	DATE	ECO NO.