






FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK</p>	 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK</p>	CONTACT CARRIER MATERIAL	TPU OR NYLON
		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER CABLE JACKET MATERIAL/COLOR	TPU/BLACK
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	4x22 AWG
		TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68




CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

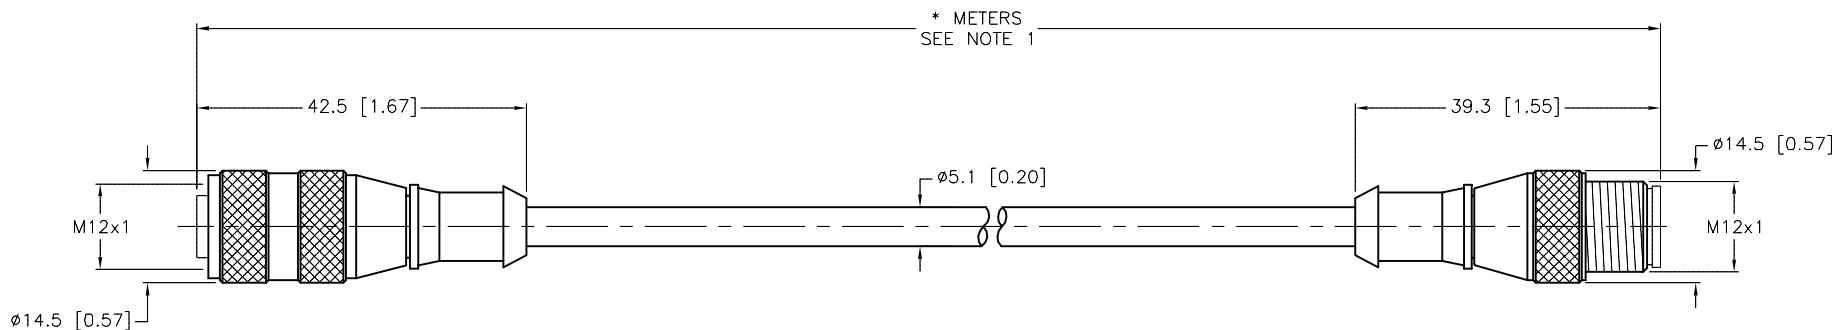- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S90" INDICATES THERMOPLASTIC POLYURETHANE (TPU) CABLE JACKET.
- "/S3013" INDICATES FLEXLIFE-5 CABLE.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div>TURCK INC <i>High Technology Sensors and Automation Controls</i></div>		<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>					
1. 2. 3. 4.											
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 07/15/13		DESCRIPTION RK 4.4T-*--RS 4.4T/S90/S3013			
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		APVD T.S.		SCALE 1=1.0					
FINISH				UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV A	
SEE SPECIFICATIONS											

A	DRAWING RELEASE	RDS	07/17/13	
REV	DESCRIPTION	BY	DATE	ECO NO.