




MALE END VIEW




FEMALE END VIEW



WIRING DIAGRAM



SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER JACKET MATERIAL/COLOR	TPU/VIOLET (HALOGEN-FREE)
CONDUCTOR INSULATION	HDPE (22 AWG), FOAMED HDPE (24 AWG)
NUMBER OF CONDUCTORS [AWG]	2x22 AWG, 2x24 AWG, 22 AWG DRAIN
SHIELDING	ALUM. FOIL (PAIRS), T-C BRAID (OVERALL)
TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

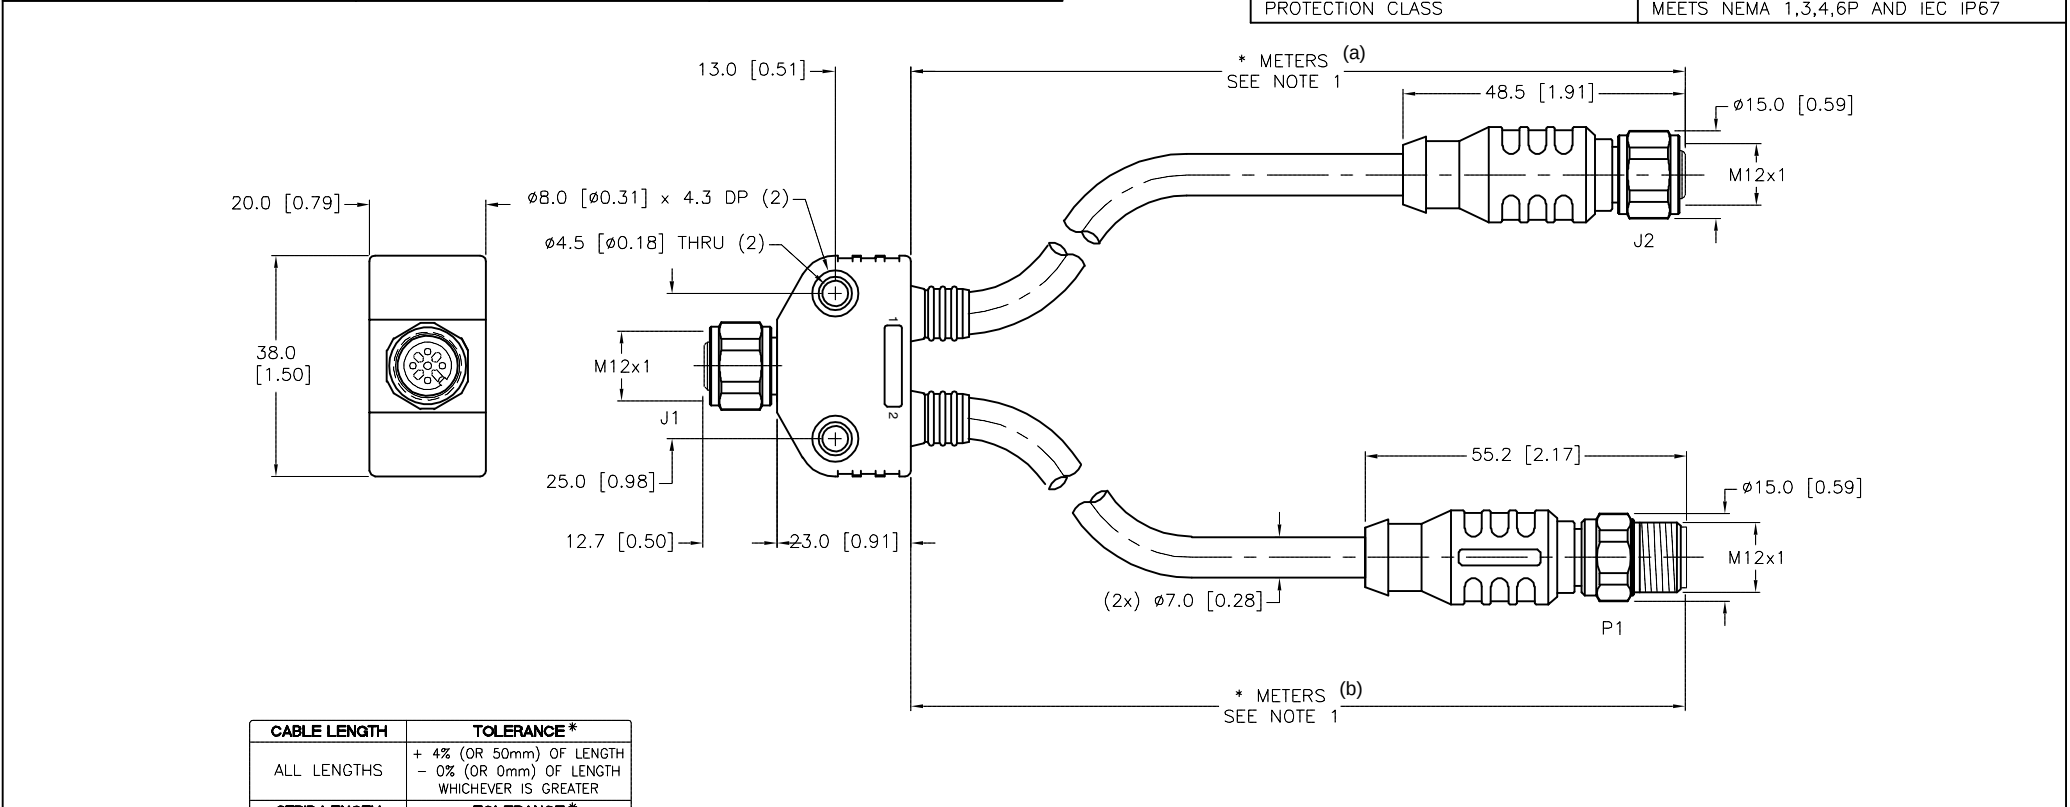

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.		DRFT	RDS	DATE 07/22/13
2.		APVD	M.A.	SCALE 1=1.3
3.	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		
4.		MILLIMETER [INCH]		
MATERIAL	CONTACT TURCK FOR MORE INFORMATION	DESCRIPTION VB2-FKMV/RKCV RSCV 5725-*M-*M (a) (b)		
FINISH		IDENTIFICATION NO.		
B UPDATED CONDUCTOR INSULATION MATERIAL		ER	11/06/18	67376
REV	DESCRIPTION	BY	DATE	ECO NO.