
MALE END VIEW
1 = ORANGE 2 = BLUE 3 = WHITE/BLACK 4 = RED/BLACK 4 = RED/BLACK 5 = GREEN/BLACK 6 = ORANGE/BLACK 10 6 = ORANGE/BLACK 7 = BLUE/BLACK 8 = BLACK/WHITE 9 = GREEN/YELLOW 10 = RED 11 = WHITE 12 = BLACK

SPECIFICATIONS							
CONTACT CARRIER MATERIAL	TPU						
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW						
CONTACT MATERIAL/PLATING	BRASS/GOLD						
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL						
RATED CURRENT [A]	7.0 A						
RATED VOLTAGE [V]	600 V						
OUTER JACKET MATERIAL/COLOR	TPE/YELLOW						
CONDUCTOR INSULATION MATERIAL	PVC						
NUMBER OF CONDUCTORS	12x16 AWG						
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)						
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K						

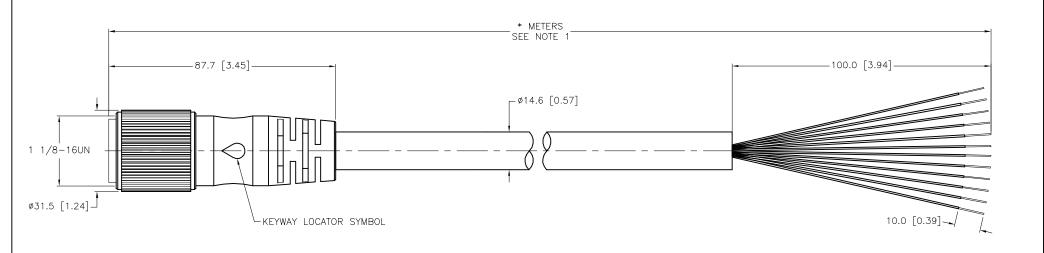

CABLE LENGTH	TOLERANCE* + 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER					
ALL LENGTHS						
STRIP LENGTH	TOLERANCE*					
0-7mm	±0.5mm					
8-29mm	±1.0mm					
30-49mm	±2.0mm					
50-69mm	±3.0mm					
70-100mm	±4.0mm					
OVER 100mm	±5.0mm					
* UNLESS OTHERWISE SPECIFIED						

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

REV DESCRIPTION

D UPDATE PROTECTION CLASS

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S3059" DESIGNATES WELDLIFE CABLE WITH TC-ER RATING AND CSA FT4 FLAME RATING.

CBM 04/13/21

DATE

76628

ECO NO.

	RELATED DOCUMENTS 1. 2.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				ck		LIS, MN -544-	55441 7769
	3. 4.							(763)	553-7 553-0 v.turck.u	708 fax
	MATERIAL		DRFT	KMY	DATE 08/07/13	DESCRIPTION DVM 106 **		M /CZOE	50	
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	T.S.	SCALE 1=1.5		RYM 126-*M/S30		<i>)</i> 9	
		DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION	LNO			REV	
	FINISH	CONTACT TURCK	MILLIMETER [INCH]						KEV	
_		FOR MORE	,	VIILLIIVIL I L						\cup
	SEE SPECIFICATIONS	INFORMATION								
					THIS DRAWING	FILE: 77703	2125		SHEET	1 OF 1