

1 = BLACK #1 (14 AWG)
2 = N/C
3 = BLACK #3 (14 AWG)
4 = BLUE #7
5 = BLUE #5
6 = BLUE #8
7 = BLACK #2 (14 AWG)
8 = BLUE #6
⊕ = GRN/YEL & HOUSING

JUMPER PINS 1,3,5

1


6

7

12


1 = JUMPER	7 = BLUE #5
2 = BLACK #1 (14 AWG)	8 = N/C
3 = JUMPER	9 = N/C
4 = BLACK #2 (14 AWG)	10 = BLUE #8
5 = JUMPER	11 = BLUE #7
6 = BLACK #3 (14 AWG)	12 = BLUE #6
 = GREEN/YELLOW	 = GREEN/YELLOW

OUTER CABLE JACKET MATERIAL/COLOR	TPE/ORANGE
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	4x14, 4x18 AWG (2x SHIELDED, TWISTED PAIRS)
SHIELDING	TC BRAIDED (Pairs), T-C BRAIDED (OVERALL)
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)

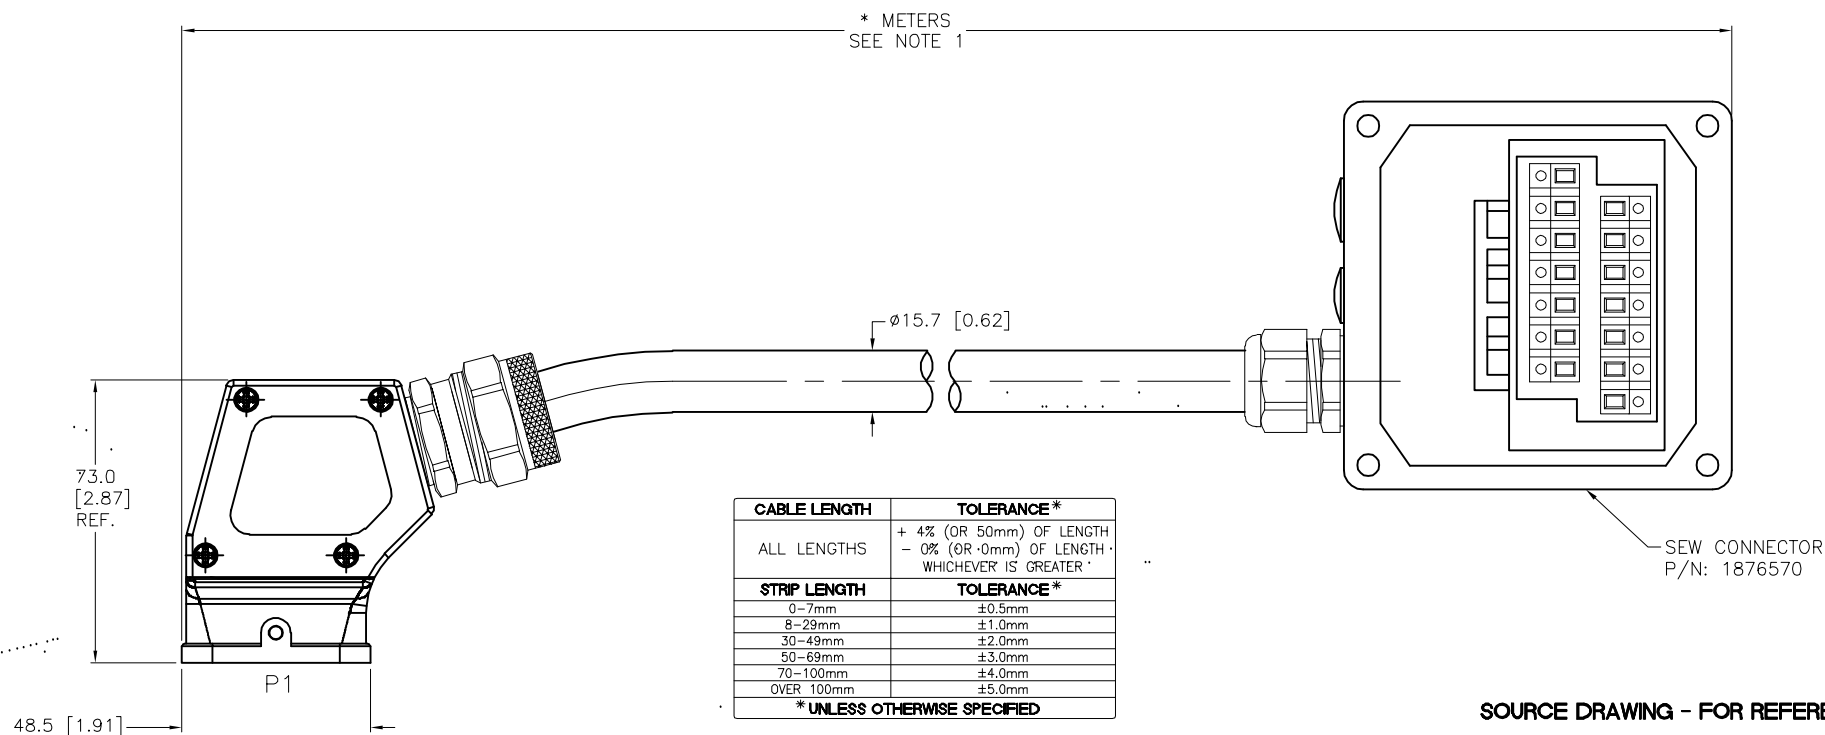

2. "/CS14121" DESIGNATES CUSTOM WIRING.

G	UPDATE END VIEW DESIGNATIONS, ADD HOOD	RDS	07/01/16	55572
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
							
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT KMY	DATE 09/09/13	DESCRIPTION HANQ8/0M-*M/CS14121			
		APVD E.S.	SCALE 1=2.0				
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV G	
		DO NOT SCALE THIS DRAWING					
		FILE: 777032261			SHEET 1 OF		