






FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NYLON OR TPU
1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GREEN/YELLOW		1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GREEN/YELLOW		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	4.0 A
				RATED VOLTAGE [V]	250 V
				OUTER JACKET MATERIAL/COLOR	PVC/GRAY
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	4x22 AWG; 1x20 AWG
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K




CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

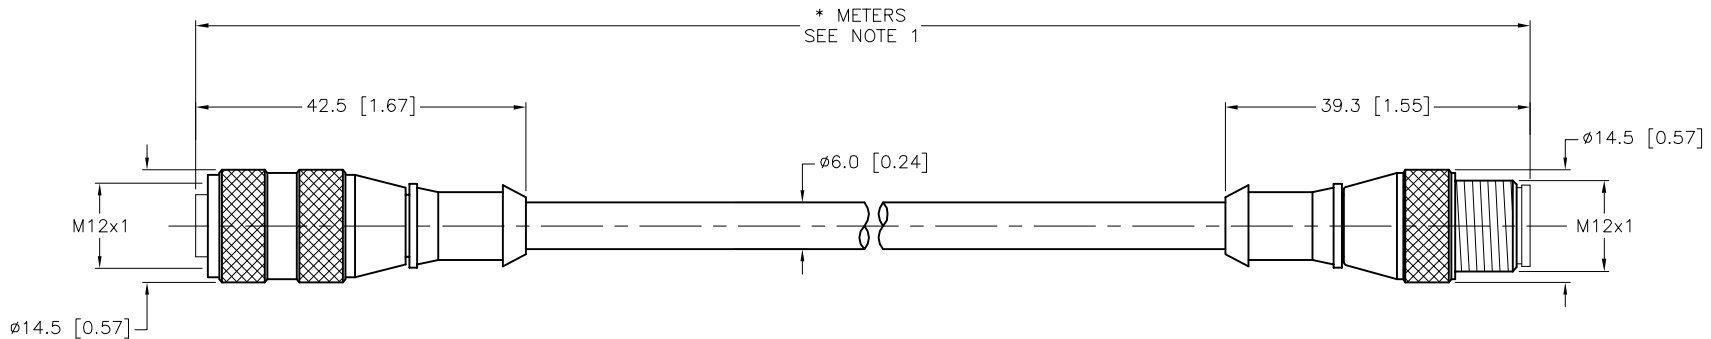1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div>TURCK</div>		<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div>						
1.												
2.		<div>ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</div> <div>CONTACT TURCK FOR MORE INFORMATION</div>		DRFT	KMY	DATE	09/16/13			DESCRIPTION RK 4.5T-*--WASW 4.5T		
3.				APVD	T.S.	SCALE	1=1.0					
4.				UNIT OF MEASUREMENT				IDENTIFICATION NO.			REV A	
MILLIMETER [INCH]												
MATERIAL		SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING				FILE: 777032280			SHEET 1 OF 1	
FINISH				SEE SPECIFICATIONS								

A	DRAWING RELEASE	KMY	09/18/13	
REV	DESCRIPTION	BY	DATE	ECO NO.