


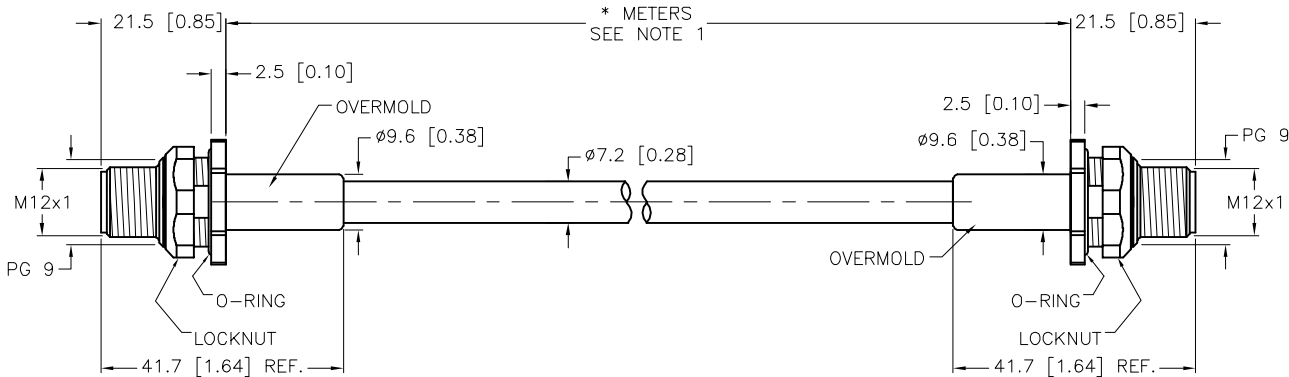






MALE END VIEW		TYPICAL PANEL CUTOUT		SPECIFICATIONS																											
 1 = WHITE/BLUE 2 = WHITE/BROWN 3 = BROWN 4 = ORANGE (-TX) 5 = WHITE/GREEN (+RX) 6 = WHITE/ORANGE (+TX) 7 = BLUE 8 = GREEN (-RX)  FAST Ethernet				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>TPU OR NYLON</td></tr><tr><td>MOLDED MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>2.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>60 V</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>TPE/TEAL</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>HDPE</td></tr><tr><td>DRAIN/SHIELD</td><td>24 AWG/ALUM.-POLYESTER FOIL & T-C BRAIDED</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4UTPx24 AWG, SOLID</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +75°C (-40°F to +167°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP68</td></tr><tr><td>MAX. PANEL THICKNESS</td><td>3.0 [.12]</td></tr></table>		CONTACT CARRIER MATERIAL	TPU OR NYLON	MOLDED MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	2.0 A	RATED VOLTAGE [V]	60 V	OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL	CONDUCTOR INSULATION MATERIAL	HDPE	DRAIN/SHIELD	24 AWG/ALUM.-POLYESTER FOIL & T-C BRAIDED	NUMBER OF CONDUCTORS [AWG]	4UTPx24 AWG, SOLID	TEMPERATURE RANGE	-40°C to +75°C (-40°F to +167°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68	MAX. PANEL THICKNESS	3.0 [.12]
CONTACT CARRIER MATERIAL	TPU OR NYLON																														
MOLDED MATERIAL/COLOR	TPU/BLACK																														
CONTACT MATERIAL/PLATING	BRASS/GOLD																														
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																														
RATED CURRENT [A]	2.0 A																														
RATED VOLTAGE [V]	60 V																														
OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL																														
CONDUCTOR INSULATION MATERIAL	HDPE																														
DRAIN/SHIELD	24 AWG/ALUM.-POLYESTER FOIL & T-C BRAIDED																														
NUMBER OF CONDUCTORS [AWG]	4UTPx24 AWG, SOLID																														
TEMPERATURE RANGE	-40°C to +75°C (-40°F to +167°F)																														
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68																														
MAX. PANEL THICKNESS	3.0 [.12]																														

																																																								
<table><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr></table> * UNLESS OTHERWISE SPECIFIED		CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm	<table><tr><th colspan="2">"843" RAW CABLE SPECIFICATIONS</th></tr><tr><td>CABLE PROPERTIES:</td><td>OIL, UV, WELD SLAG, AND ABRASION RESISTANT</td></tr><tr><td>VOLTAGE RATINGS (MAX):</td><td>600V</td></tr><tr><td>CATEGORY:</td><td>CAT 5e</td></tr><tr><td>APPROVALS:</td><td>C(UL)US CM</td></tr><tr><td colspan="2">COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES</td></tr></table>		"843" RAW CABLE SPECIFICATIONS		CABLE PROPERTIES:	OIL, UV, WELD SLAG, AND ABRASION RESISTANT	VOLTAGE RATINGS (MAX):	600V	CATEGORY:	CAT 5e	APPROVALS:	C(UL)US CM	COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES		SOURCE DRAWING - FOR REFERENCE ONLY																						
CABLE LENGTH	TOLERANCE*																																																							
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																																																							
STRIP LENGTH	TOLERANCE*																																																							
0-7mm	±0.5mm																																																							
8-29mm	±1.0mm																																																							
30-49mm	±2.0mm																																																							
50-69mm	±3.0mm																																																							
70-100mm	±4.0mm																																																							
OVER 100mm	±5.0mm																																																							
"843" RAW CABLE SPECIFICATIONS																																																								
CABLE PROPERTIES:	OIL, UV, WELD SLAG, AND ABRASION RESISTANT																																																							
VOLTAGE RATINGS (MAX):	600V																																																							
CATEGORY:	CAT 5e																																																							
APPROVALS:	C(UL)US CM																																																							
COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES																																																								
NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.		<table><tr><td>RELATED DOCUMENTS</td><td>3RD ANGLE PROJECTION</td><td colspan="2">THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</td><td colspan="2">3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</td></tr><tr><td>1.</td><td rowspan="2"></td><td>DRFT</td><td>TR</td><td>DATE</td><td>09/19/13</td></tr><tr><td>2.</td><td>APVD</td><td>L.H.</td><td>SCALE</td><td>1=1.3</td></tr><tr><td>3.</td><td rowspan="2">ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</td><td colspan="2">UNIT OF MEASUREMENT</td><td colspan="2">DESCRIPTION</td></tr><tr><td>4.</td><td colspan="2">MILLIMETER [INCH]</td><td colspan="2">FSFD FSFD 843-*M</td></tr><tr><td>MATERIAL</td><td rowspan="4">CONTACT TURCK FOR MORE INFORMATION</td><td colspan="2">DO NOT SCALE THIS DRAWING</td><td colspan="2">IDENTIFICATION NO.</td></tr><tr><td>FINISH</td><td colspan="2">FILE: 777032292</td><td colspan="2">REV</td></tr><tr><td colspan="2">E UPDATE ORIENTATION</td><td colspan="2">NF 01/18/16</td><td colspan="2">53130</td></tr><tr><td colspan="2">REV DESCRIPTION</td><td colspan="2">BY DATE</td><td colspan="2">ECO NO.</td></tr></table>				RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		1.		DRFT	TR	DATE	09/19/13	2.	APVD	L.H.	SCALE	1=1.3	3.	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		DESCRIPTION		4.	MILLIMETER [INCH]		FSFD FSFD 843-*M		MATERIAL	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		FINISH	FILE: 777032292		REV		E UPDATE ORIENTATION		NF 01/18/16		53130		REV DESCRIPTION		BY DATE		ECO NO.	
RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us																																																				
1.		DRFT	TR	DATE	09/19/13																																																			
2.		APVD	L.H.	SCALE	1=1.3																																																			
3.	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		DESCRIPTION																																																				
4.		MILLIMETER [INCH]		FSFD FSFD 843-*M																																																				
MATERIAL	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.																																																				
FINISH		FILE: 777032292		REV																																																				
E UPDATE ORIENTATION		NF 01/18/16		53130																																																				
REV DESCRIPTION		BY DATE		ECO NO.																																																				