



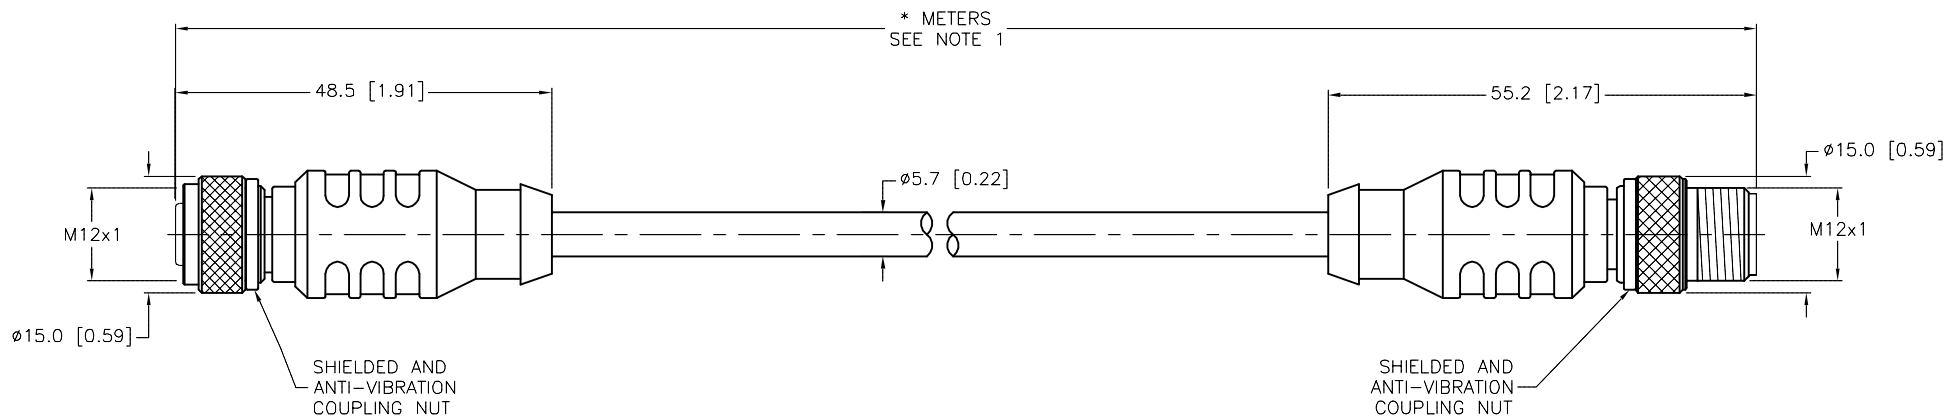


FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS																									
 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GRAY</p> 	 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GRAY</p> 	<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON or TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>5x22 AWG</td></tr><tr><td>DRAIN/SHIELD</td><td>24 AWG/ALUM.-POLYESTER FOIL & T-C BRAIDED</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +80°C (-40°F to +176°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON or TPU	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	OUTER CABLE JACKET MATERIAL/COLOR	TPU/BLACK	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	5x22 AWG	DRAIN/SHIELD	24 AWG/ALUM.-POLYESTER FOIL & T-C BRAIDED	TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)	PROTECTION CLASS	MEETS IEC IP67	
CONTACT CARRIER MATERIAL	NYLON or TPU																										
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK																										
CONTACT MATERIAL/PLATING	BRASS/GOLD																										
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																										
RATED CURRENT [A]	4.0 A																										
RATED VOLTAGE [V]	250 V																										
OUTER CABLE JACKET MATERIAL/COLOR	TPU/BLACK																										
CONDUCTOR INSULATION MATERIAL	PVC																										
NUMBER OF CONDUCTORS [AWG]	5x22 AWG																										
DRAIN/SHIELD	24 AWG/ALUM.-POLYESTER FOIL & T-C BRAIDED																										
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)																										
PROTECTION CLASS	MEETS IEC IP67																										




CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- 1."*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. COUPLING NUTS ARE CONNECTED TO SHIELD.
3. "/S760" INDICATES BLACK CABLE JACKET.
4. "/S771" INDICATES BLACK MOLDED PLUG BODIES.
5. "/S3090" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE JACKET WITH +80°C TEMPERATURE RATING.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div>		<div><div>TURCK INC</div><div>High Technology Sensors and Automation Controls</div></div>		<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>	
1. 2. 3. 4.									
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 12/18/13		DESCRIPTION	
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		APVD H.D.		SCALE 1=1.0		RKS 4.5T-*--RSS 4.5T/S760/S771/S3090	
FINISH				UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV A	
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING				FILE: 777032680		SHEET 1 OF 1	