
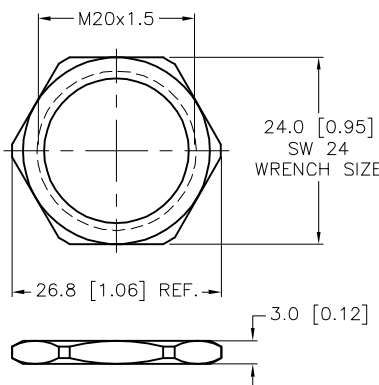
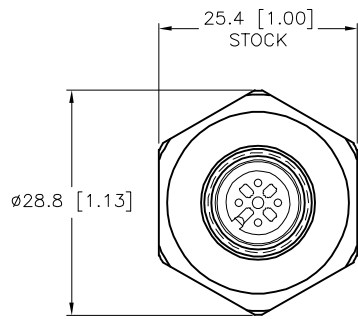
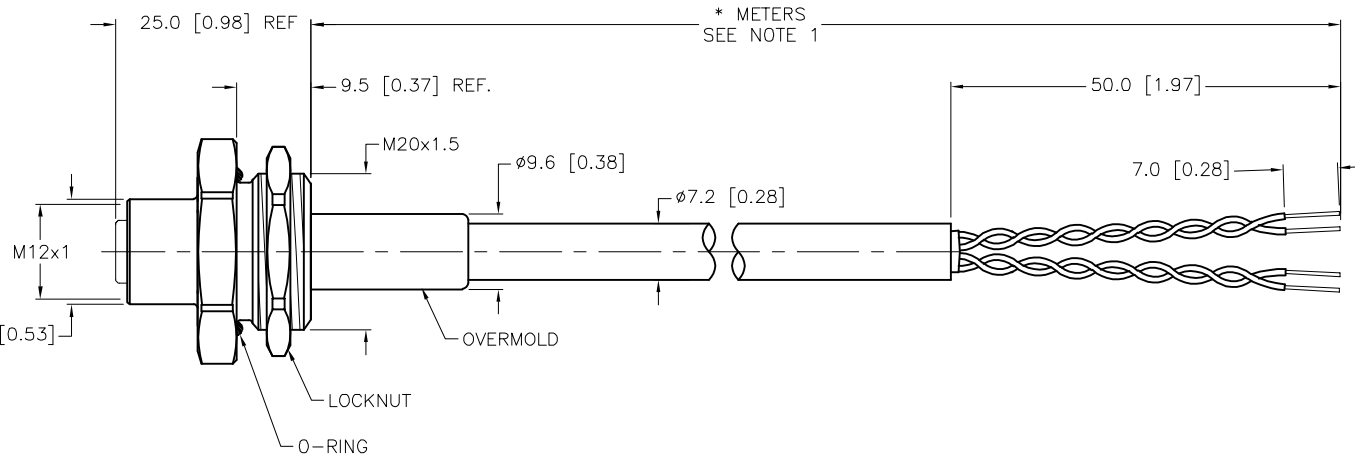



FEMALE END VIEW		LOCKNUT		SPECIFICATIONS																											
 1 = WHITE (+TX) 2 = WHITE (+RX) 3 = ORANGE (-TX) 4 = GREEN (-RX) 				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON or TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>HOUSING MATERIAL/FINISH</td><td>316 STAINLESS STEEL /PASSIVATED</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPE/TEAL</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>FEP</td></tr><tr><td>CONDUCTORS</td><td>4x22 AWG, STRANDED</td></tr><tr><td>SHIELD (OVERALL)</td><td>ALUM.-POLYESTER FOIL & TINNED-COPPER BRAID</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>NEMA 1,3,4,6P AND IEC IP68</td></tr><tr><td>CABLE RATINGS</td><td>UL: ITC/PLTC/AWM, 90°C, 600 V CSA: AWM, 90°C, 600 V</td></tr></table>		CONTACT CARRIER MATERIAL	NYLON or TPU	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD	HOUSING MATERIAL/FINISH	316 STAINLESS STEEL /PASSIVATED	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	OUTER JACKET MATERIAL/COLOR	TPE/TEAL	CONDUCTOR INSULATION MATERIAL	FEP	CONDUCTORS	4x22 AWG, STRANDED	SHIELD (OVERALL)	ALUM.-POLYESTER FOIL & TINNED-COPPER BRAID	TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68	CABLE RATINGS	UL: ITC/PLTC/AWM, 90°C, 600 V CSA: AWM, 90°C, 600 V
CONTACT CARRIER MATERIAL	NYLON or TPU																														
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK																														
CONTACT MATERIAL/PLATING	BRASS/GOLD																														
HOUSING MATERIAL/FINISH	316 STAINLESS STEEL /PASSIVATED																														
RATED CURRENT [A]	4.0 A																														
RATED VOLTAGE [V]	250 V																														
OUTER JACKET MATERIAL/COLOR	TPE/TEAL																														
CONDUCTOR INSULATION MATERIAL	FEP																														
CONDUCTORS	4x22 AWG, STRANDED																														
SHIELD (OVERALL)	ALUM.-POLYESTER FOIL & TINNED-COPPER BRAID																														
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)																														
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68																														
CABLE RATINGS	UL: ITC/PLTC/AWM, 90°C, 600 V CSA: AWM, 90°C, 600 V																														

				* METERS SEE NOTE 1																					
<table><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr><tr><td colspan="2">*UNLESS OTHERWISE SPECIFIED</td></tr></table>		CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm	*UNLESS OTHERWISE SPECIFIED					
CABLE LENGTH	TOLERANCE*																								
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																								
STRIP LENGTH	TOLERANCE*																								
0-7mm	±0.5mm																								
8-29mm	±1.0mm																								
30-49mm	±2.0mm																								
50-69mm	±3.0mm																								
70-100mm	±4.0mm																								
OVER 100mm	±5.0mm																								
*UNLESS OTHERWISE SPECIFIED																									
NOTES:																									
1. "*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.																									
D	UPDATE WIRING	NF	02/04/25	80961																					
REV	DESCRIPTION	BY	DATE	ECO NO.																					

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT KMY		DATE 01/08/14	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD C.K.		SCALE 1=1.0	
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS				MILLIMETER [INCH]		P-FKV 4.9-1873-*/M20	
						IDENTIFICATION NO.	
						REV	
						DO NOT SCALE THIS DRAWING	
						FILE: 777032737	
						SHEET 1 OF 1	