





MALE END VIEW		FEMALE END VIEW		SPECIFICATIONS	
	1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GRAY 6 = PINK 7 = BLUE 8 = RED 9 = BLACK 10 = VIOLET 11 = PINK/GRAY 12 = RED/BLUE		1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GRAY 6 = PINK 7 = BLUE 8 = RED 9 = BLACK 10 = VIOLET 11 = PINK/GRAY 12 = RED/BLUE	CONTACT CARRIER MATERIAL	NYLON or PBT
				MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	2.0 A
				RATED VOLTAGE [V]	150 V
				OUTER JACKET MATERIAL/COLOR	PVC/GRAY
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	12x26 AWG, 26 AWG DRAIN
				SHIELD/BRAID	ALUM.-POLYESTER FOIL/36 AWG T-C BRAID
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	IEC IP67

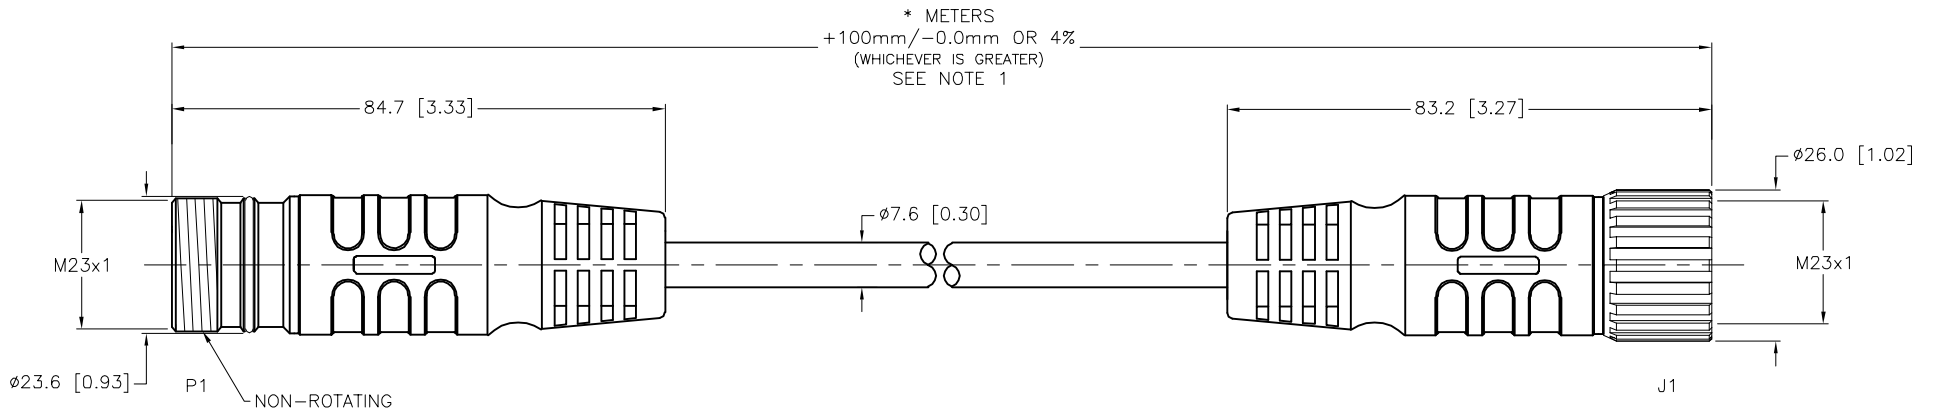

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT RDS		DATE 02/12/14	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD H.D.		SCALE 1=1.3	
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS				MILLIMETER [INCH]		E-CSSM CKM 12-1687-* /A	
SEE SPECIFICATIONS				DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
B		UPDATE CABLE OD		NF		REV	
REV		DESCRIPTION		BY		DATE	
						ECO NO.	
						FILE: 777032930	
						SHEET 1 OF 1	