

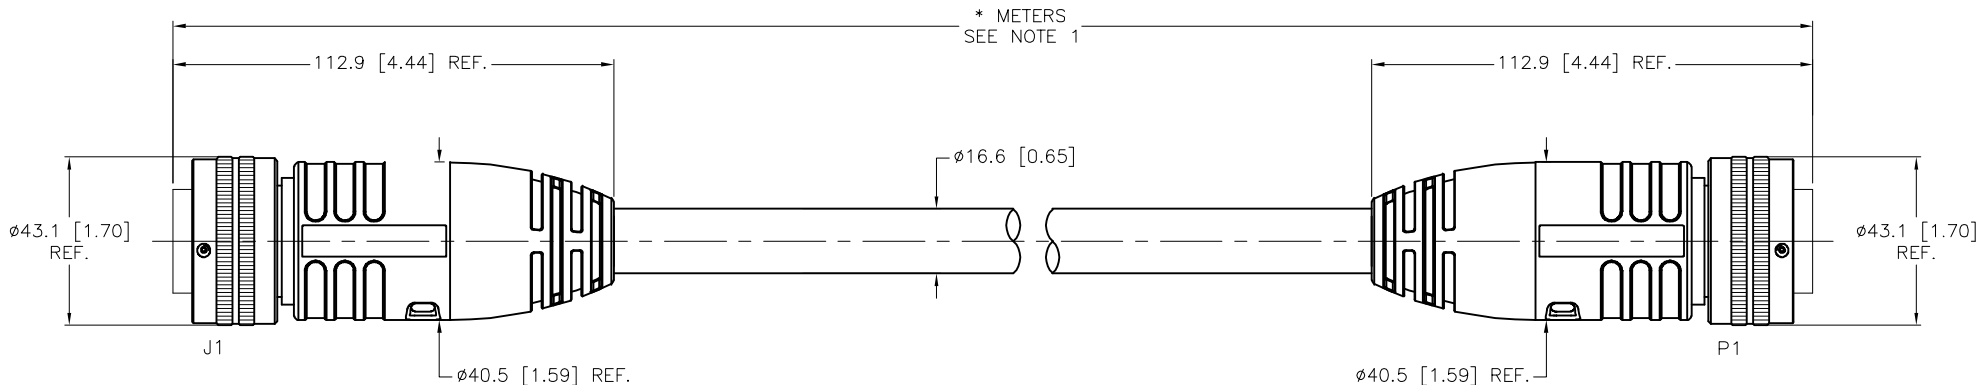
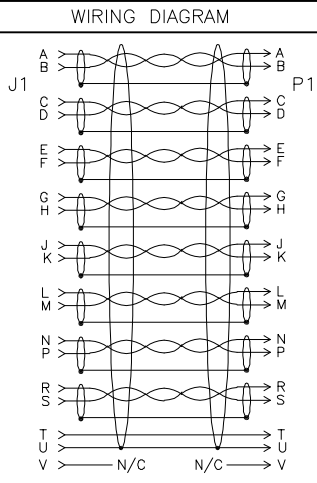





FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS																															
	A = WHT/BLK B = BLK/WHT C = WHT/GRN D = GRN/WHT E = WHT/RED F = RED/WHT G = WHT/ORG H = ORG/WHT J = WHT/BLU K = BLU/WHT L = WHT/BRN M = BRN/WHT N = WHT/YEL P = YEL/WHT R = WHT/VIO S = VIO/WHT T = GRN/YEL U = DRAIN V = N/C		A = WHT/BLK B = BLK/WHT C = WHT/GRN D = GRN/WHT E = WHT/RED F = RED/WHT G = WHT/ORG H = ORG/WHT J = WHT/BLU K = BLU/WHT L = WHT/BRN M = BRN/WHT N = WHT/YEL P = YEL/WHT R = WHT/VIO S = VIO/WHT T = GRN/YEL U = DRAIN V = N/C	<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NEOPRENE</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>PVC/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>COPPER ALLOY/SILVER</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>ALUMINUM ALLOY/OLIVE DRAB CHROMATE</td></tr><tr><td>MOLD SLEEVE</td><td>ALUMINUM/BLACK ANODIZED</td></tr><tr><td>RATED CURRENT [A]</td><td>7.5 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>500 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS</td><td>16x18 AWG, 1x18 AWG (GND)</td></tr><tr><td>DRAIN/SHIELD</td><td>9x20 AWG DRAINS/ALUMINUM-POLYESTER FOIL</td></tr><tr><td>CONDUCTOR ARRANGEMENT</td><td>8 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67, IP68</td></tr><tr><td>CONNECTOR TYPE</td><td>MIL-DTL-5015</td></tr></table>	CONTACT CARRIER MATERIAL	NEOPRENE	MOLDED HEAD MATERIAL/COLOR	PVC/BLACK	CONTACT MATERIAL/PLATING	COPPER ALLOY/SILVER	COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE	MOLD SLEEVE	ALUMINUM/BLACK ANODIZED	RATED CURRENT [A]	7.5 A	RATED VOLTAGE [V]	500 V	OUTER JACKET MATERIAL/COLOR	PVC/BLACK	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS	16x18 AWG, 1x18 AWG (GND)	DRAIN/SHIELD	9x20 AWG DRAINS/ALUMINUM-POLYESTER FOIL	CONDUCTOR ARRANGEMENT	8 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68	CONNECTOR TYPE	MIL-DTL-5015	
CONTACT CARRIER MATERIAL	NEOPRENE																																		
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK																																		
CONTACT MATERIAL/PLATING	COPPER ALLOY/SILVER																																		
COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE																																		
MOLD SLEEVE	ALUMINUM/BLACK ANODIZED																																		
RATED CURRENT [A]	7.5 A																																		
RATED VOLTAGE [V]	500 V																																		
OUTER JACKET MATERIAL/COLOR	PVC/BLACK																																		
CONDUCTOR INSULATION MATERIAL	PVC																																		
NUMBER OF CONDUCTORS	16x18 AWG, 1x18 AWG (GND)																																		
DRAIN/SHIELD	9x20 AWG DRAINS/ALUMINUM-POLYESTER FOIL																																		
CONDUCTOR ARRANGEMENT	8 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN																																		
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																																		
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68																																		
CONNECTOR TYPE	MIL-DTL-5015																																		
CONNECTOR TYPE/STYLE - GT06M SHELL SIZE - 22 INSERT ARRANGEMENT - 14S		CONNECTOR TYPE/STYLE - GT06M SHELL SIZE - 22 INSERT ARRANGEMENT - 14P																																	

		* METERS SEE NOTE 1																																																																	
		<table><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr></table> * UNLESS OTHERWISE SPECIFIED		CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm																																														
CABLE LENGTH	TOLERANCE*																																																																		
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																																																																		
STRIP LENGTH	TOLERANCE*																																																																		
0-7mm	±0.5mm																																																																		
8-29mm	±1.0mm																																																																		
30-49mm	±2.0mm																																																																		
50-69mm	±3.0mm																																																																		
70-100mm	±4.0mm																																																																		
OVER 100mm	±5.0mm																																																																		
NOTES:		SOURCE DRAWING - FOR REFERENCE ONLY																																																																	
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.		<table><tr><td>RELATED DOCUMENTS</td><td>3RD ANGLE PROJECTION</td><td colspan="2">THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</td><td colspan="2">3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</td></tr><tr><td>1.</td><td rowspan="2"></td><td>DRFT</td><td>RDS</td><td>DATE</td><td>01/13/14</td></tr><tr><td>2.</td><td>APVD</td><td>J.S.</td><td>SCALE</td><td>1=2.0</td></tr><tr><td>3.</td><td rowspan="2">ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</td><td colspan="2">UNIT OF MEASUREMENT</td><td colspan="2">DESCRIPTION</td></tr><tr><td>4.</td><td colspan="2">MILLIMETER [INCH]</td><td colspan="2">GT06M-22-14S-1763-*--22-14P</td></tr><tr><td>MATERIAL</td><td rowspan="2">CONTACT TURCK FOR MORE INFORMATION</td><td colspan="2">DO NOT SCALE THIS DRAWING</td><td colspan="2">IDENTIFICATION NO.</td></tr><tr><td colspan="2">SEE SPECIFICATIONS</td><td colspan="2"></td><td colspan="2">REV</td></tr><tr><td>FINISH</td><td rowspan="2"></td><td colspan="2"></td><td colspan="2">E</td></tr><tr><td colspan="2">SEE SPECIFICATIONS</td><td colspan="2"></td><td colspan="2">FILE: 777032960</td></tr><tr><td></td><td rowspan="2"></td><td colspan="2"></td><td colspan="2">SHEET 1 OF 1</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td></tr></table>		RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		1.		DRFT	RDS	DATE	01/13/14	2.	APVD	J.S.	SCALE	1=2.0	3.	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		DESCRIPTION		4.	MILLIMETER [INCH]		GT06M-22-14S-1763-*--22-14P		MATERIAL	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		SEE SPECIFICATIONS				REV		FINISH				E		SEE SPECIFICATIONS				FILE: 777032960						SHEET 1 OF 1							
RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us																																																															
1.		DRFT	RDS	DATE	01/13/14																																																														
2.		APVD	J.S.	SCALE	1=2.0																																																														
3.	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		DESCRIPTION																																																															
4.		MILLIMETER [INCH]		GT06M-22-14S-1763-*--22-14P																																																															
MATERIAL	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.																																																															
SEE SPECIFICATIONS				REV																																																															
FINISH				E																																																															
SEE SPECIFICATIONS				FILE: 777032960																																																															
				SHEET 1 OF 1																																																															
E	UPDATE CABLE OD	KB	11/25/24	500000010735																																																															
REV	DESCRIPTION	BY	DATE	ECO NO.																																																															