


MALE END VIEW





A = WHT/BLK
B = BLK/WHT
C = WHT/GRN
D = GRN/WHT
E = WHT/RED
F = RED/WHT
G = WHT/ORG
H = ORG/WHT
J = WHT/BLU
K = BLU/WHT
L = WHT/BRN
M = BRN/WHT
N = WHT/YEL
P = YEL/WHT
R = WHT/VIO
S = VIO/WHT
T = GRN/YEL
U = GRAY
V = N/C

CONNECTOR
TYPE/STYLE - GT00F
SHELL SIZE - 22
INSERT ARRANGEMENT - 14P

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NEOPRENE
CONTACT MATERIAL/PLATING	COPPER ALLOY/SILVER
HOUSING MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
RATED CURRENT [A]	7.0 A
RATED VOLTAGE [V]	300 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS	18x18 AWG
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

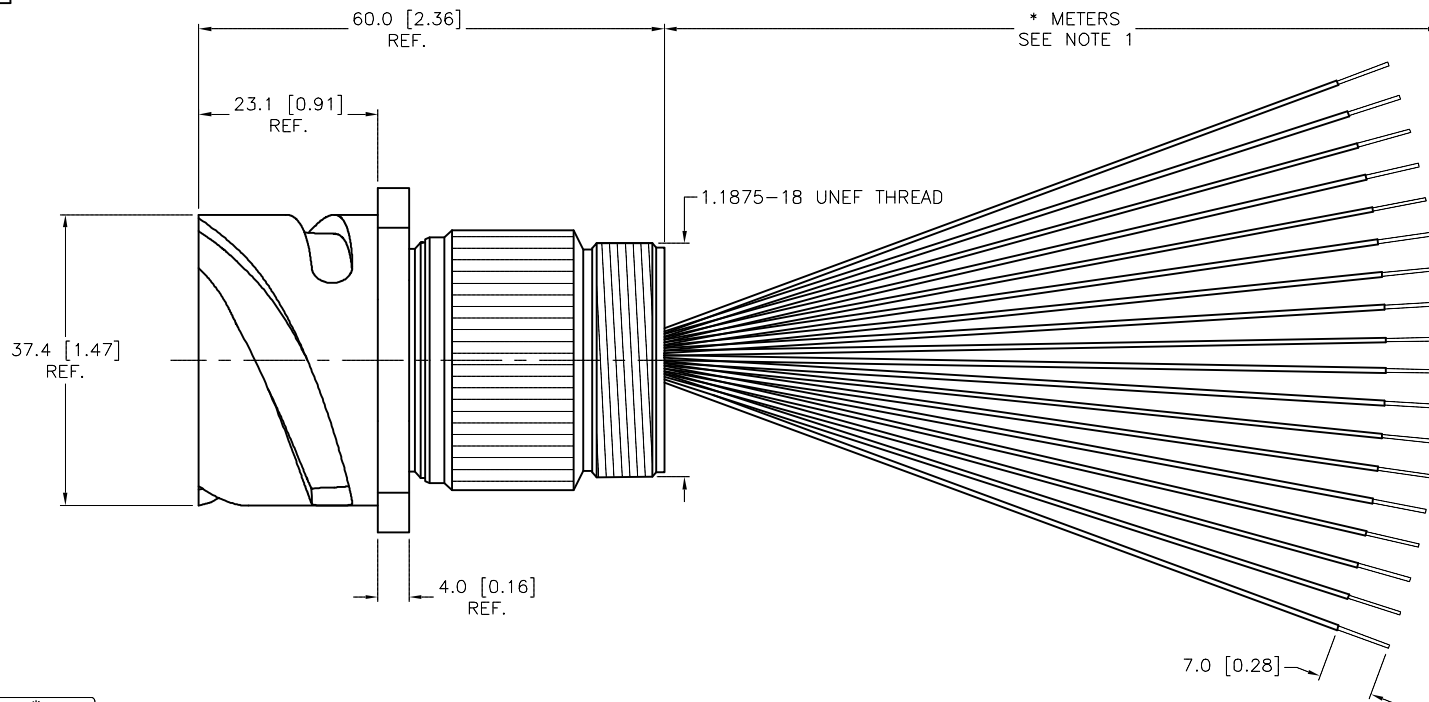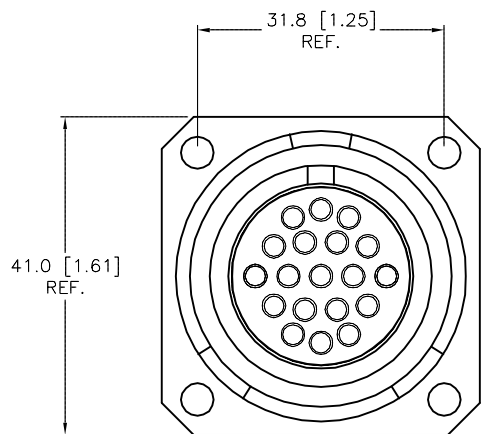


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us TURCK			
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS	DATE 02/18/14	DESCRIPTION GT00F-22-14P-1763-*		
FINISH SEE SPECIFICATIONS			APVD J.S.	SCALE 1=1.0			
		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO.	REV A
			DO NOT SCALE THIS DRAWING				
				FILE: 777032964	SHEET 1 OF 1		

A	DRAWING RELEASE	TR	03/10/14	
REV	DESCRIPTION	BY	DATE	ECO NO.