


MALE END VIEW




A = GREEN/YELLOW
B = WHITE
C = RED
D = ORANGE
E = BLUE
F = WHITE/BLACK
G = BLACK

CONNECTOR
TYPE/STYLE - MS 3106M
SHELL SIZE - 20
INSERT ARRANGEMENT - 15P

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NEOPRENE
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	COPPER ALLOY/SILVER
COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
MOLD SLEEVE	ALUMINUM/BLACK ANODIZED
RATED CURRENT [A]	20.0 A
RATED VOLTAGE [V]	500V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS	7x14 AWG
TEMPERATURE RATING	-40°C TO +105°C (-40°F TO +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68
CONNECTOR TYPE	MIL-DTL-5015

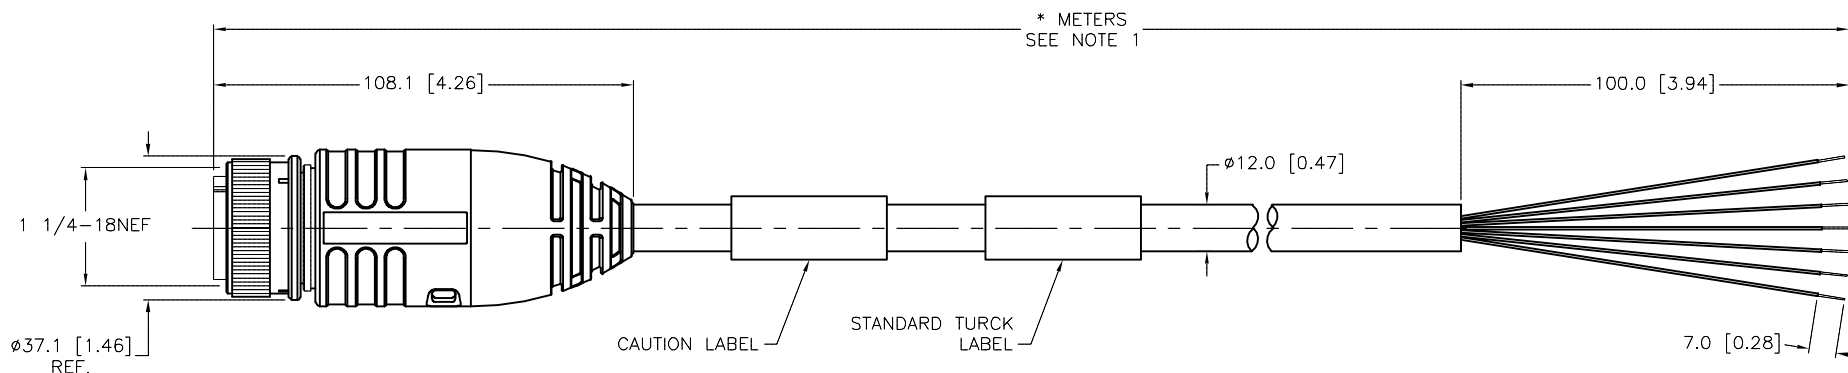

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	± 0.5 mm
8-29mm	± 1.0 mm
30-49mm	± 2.0 mm
50-69mm	± 3.0 mm
70-100mm	± 4.0 mm
OVER 100mm	± 5.0 mm

*UNLESS OTHERWISE SPECIFIED




CAUTION:

RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	KMY	DATE	10/31/13	DESCRIPTION MS 3106M-20-15P-1079-*			
APVD		H.D.	SCALE	1=2.0					
FINISH SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING				IDENTIFICATION NO.		REV B
		FILE: 777033281				SHEET 1 OF			

B	UPDATE CONDUCTOR COLOR	NF	07/06/17	60515
REV	DESCRIPTION	BY	DATE	ECO NO.