






| MALE END VIEW | FEMALE END VIEW | SPECIFICATIONS | |
|--|---|-------------------------------|---|
|  |  | CONTACT CARRIER MATERIAL | TPU |
| 1 = BLUE (- VOLTAGE) 2 = BROWN (+ VOLTAGE) 3 = BARE (SHIELD) 4 = N/C | 1 = BLUE (- VOLTAGE) 2 = BROWN (+ VOLTAGE) 3 = BARE (SHIELD) 4 = N/C | MOLDED HEAD MATERIAL/COLOR | TPU/YELLOW |
|  FOUNDATION™ fieldbus |  FOUNDATION™ fieldbus | CONTACT MATERIAL/PLATING | BRASS/GOLD |
| | | COUPLING NUT MATERIAL/PLATING | BRASS/NICKEL |
| | | RATED CURRENT [A] | 9.0 A |
| | | RATED VOLTAGE [V] | 600 V |
| | | CABLE JACKET MATERIAL/COLOR | PVC/ORANGE |
| | | CONDUCTOR INSULATION MATERIAL | XLPE |
| | | NUMBER OF CONDUCTORS [AWG] | 2x18 AWG, 20 AWG DRAIN |
| | | SHIELDING | ALUM. FOIL & TINNED COPPER BRAIDED |
| | | TEMPERATURE RATING | -40°C to +105°C (-40°F to +221°F) |
| | | PROTECTION CLASS | NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K |



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

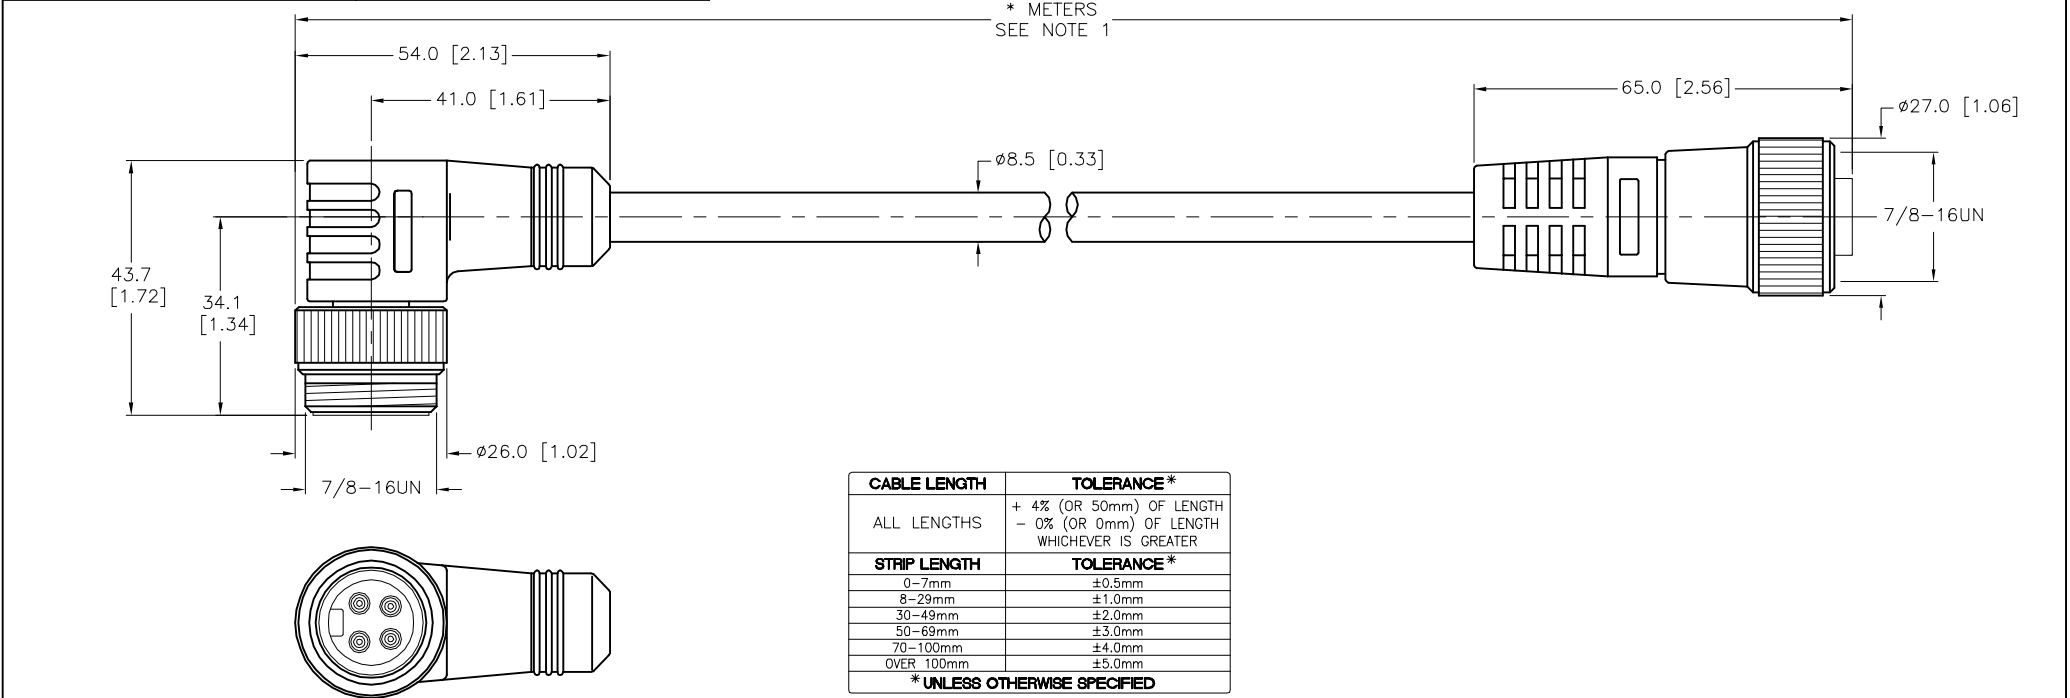1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. 2020 NEC NOW REQUIRES A DEDICATED GROUND CONDUCTOR FOR ITC-ER AND PLTC-ER CABLES WHEN INSTALLED IN HAZARDOUS LOCATIONS ALTHOUGH UL CABLE STANDARDS DO NOT REQUIRE A GROUND CONDUCTOR. THIS PRODUCT DOES NOT HAVE A DEDICATED GROUND CONDUCTOR. THEREFORE, WHEN INSTALLED IN A HAZARDOUS LOCATION THE INSTALLATION PRACTICES FOR ITC OR PLTC CABLES MUST BE FOLLOWED TO PROVIDE GROUND CONTINUITY.

| | | | | | | | | | |
|-----|-------------------------|-----|----------|---------|----------------|----------------------|---------------------------|-----------------|--------------|
| D | UPDATE PROTECTION CLASS | CBM | 04/13/21 | 76628 | SPECIFICATIONS | FOR MORE INFORMATION | | | D |
| REV | DESCRIPTION | BY | DATE | ECO NO. | | | DO NOT SCALE THIS DRAWING | FILE: 777033409 | SHEET 1 OF 1 |