






FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS																									
																													
<p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GRAY</p> 		<p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GRAY</p> 																											
				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON or TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>PVC/GRAY</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>5x22 AWG</td></tr><tr><td>DRAIN/SHIELD</td><td>24 AWG/ALUM.-POLYESTER FOIL & T-C BRAIDED</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS IEC IP67</td></tr></table>		CONTACT CARRIER MATERIAL	NYLON or TPU	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	5x22 AWG	DRAIN/SHIELD	24 AWG/ALUM.-POLYESTER FOIL & T-C BRAIDED	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS IEC IP67
CONTACT CARRIER MATERIAL	NYLON or TPU																												
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW																												
CONTACT MATERIAL/PLATING	BRASS/GOLD																												
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																												
RATED CURRENT [A]	4.0 A																												
RATED VOLTAGE [V]	250 V																												
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY																												
CONDUCTOR INSULATION MATERIAL	PVC																												
NUMBER OF CONDUCTORS [AWG]	5x22 AWG																												
DRAIN/SHIELD	24 AWG/ALUM.-POLYESTER FOIL & T-C BRAIDED																												
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																												
PROTECTION CLASS	MEETS IEC IP67																												




SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

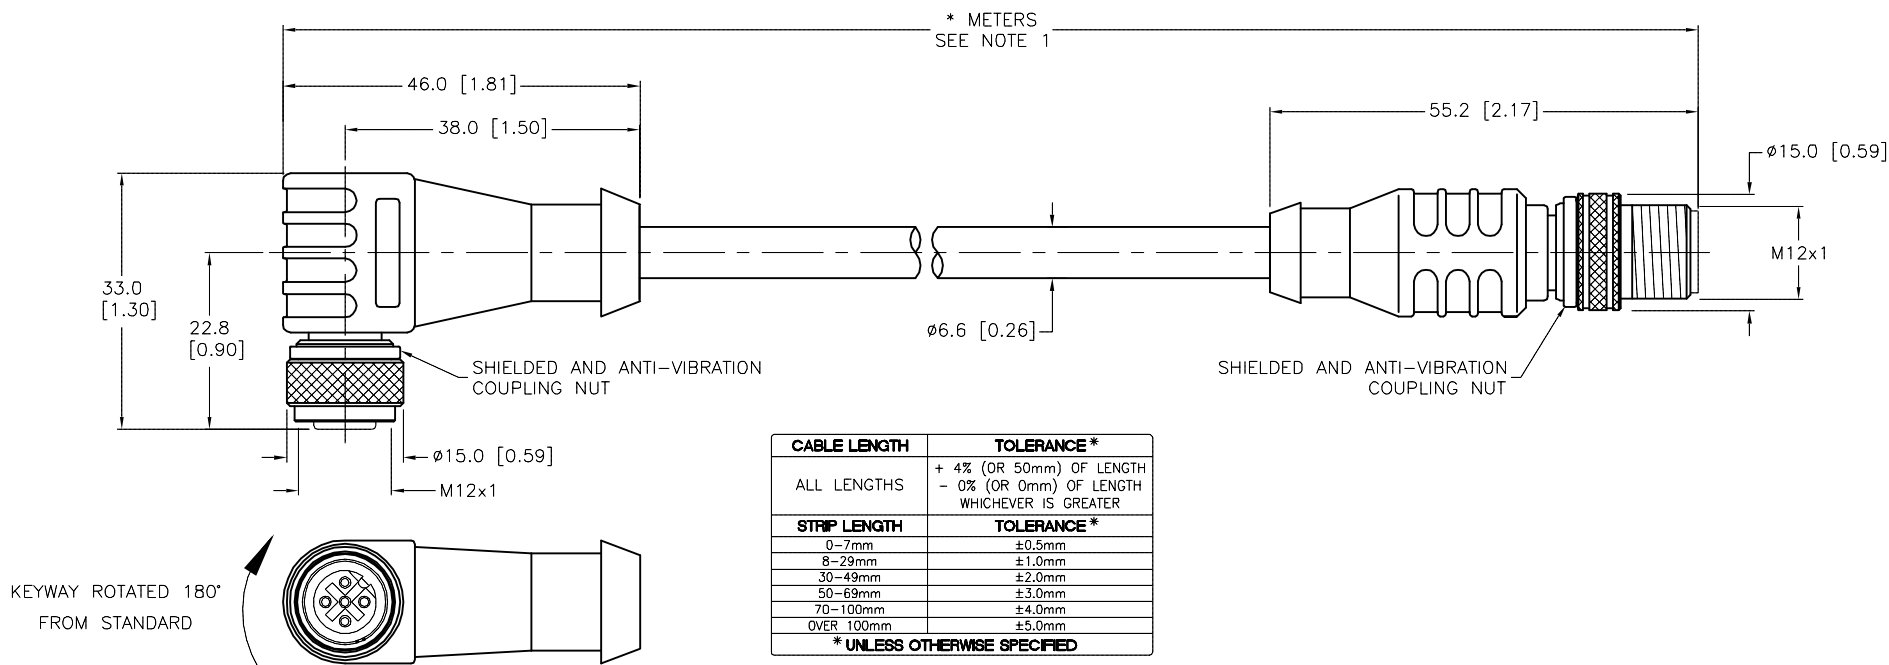- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/C1118" DESIGNATES FEMALE M12 RIGHT ANGLE CORDSET WITH KEY-WAY ROTATED 180 DEGREES FROM STANDARD.
- COUPLING NUTS ARE CONNECTED TO SHIELD.

A	DRAWING RELEASE	RDS	06/20/14	
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT RDS		DATE 06/20/14	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD T.S.		SCALE 1=1	
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION WKS 4.5T-*--RSS 4.5T/C1118	
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV A	
SEE SPECIFICATIONS		FILE: 777033539		SHEET 1 OF 1			