

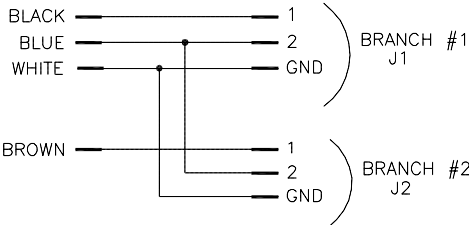


VALVE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
	TRUNK 	CONTACT CARRIER MATERIAL	NYLON OR TPU
		CONTACT MATERIAL/PLATING	BRASS/SILVER (J1,J2)
		MOLDED MATERIAL COLOR	TPU/YEL (VB2), TRANSLUCENT BLK (J1,J2)
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	0-220 VAC/VDC
		OUTER JACKET MATERIAL/COLOR	PVC/GRAY (TRUNK), PVC/GRAY (J1,J2)
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	4x22 AWG (TRUNK), 3x18 AWG (J1,J2)
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

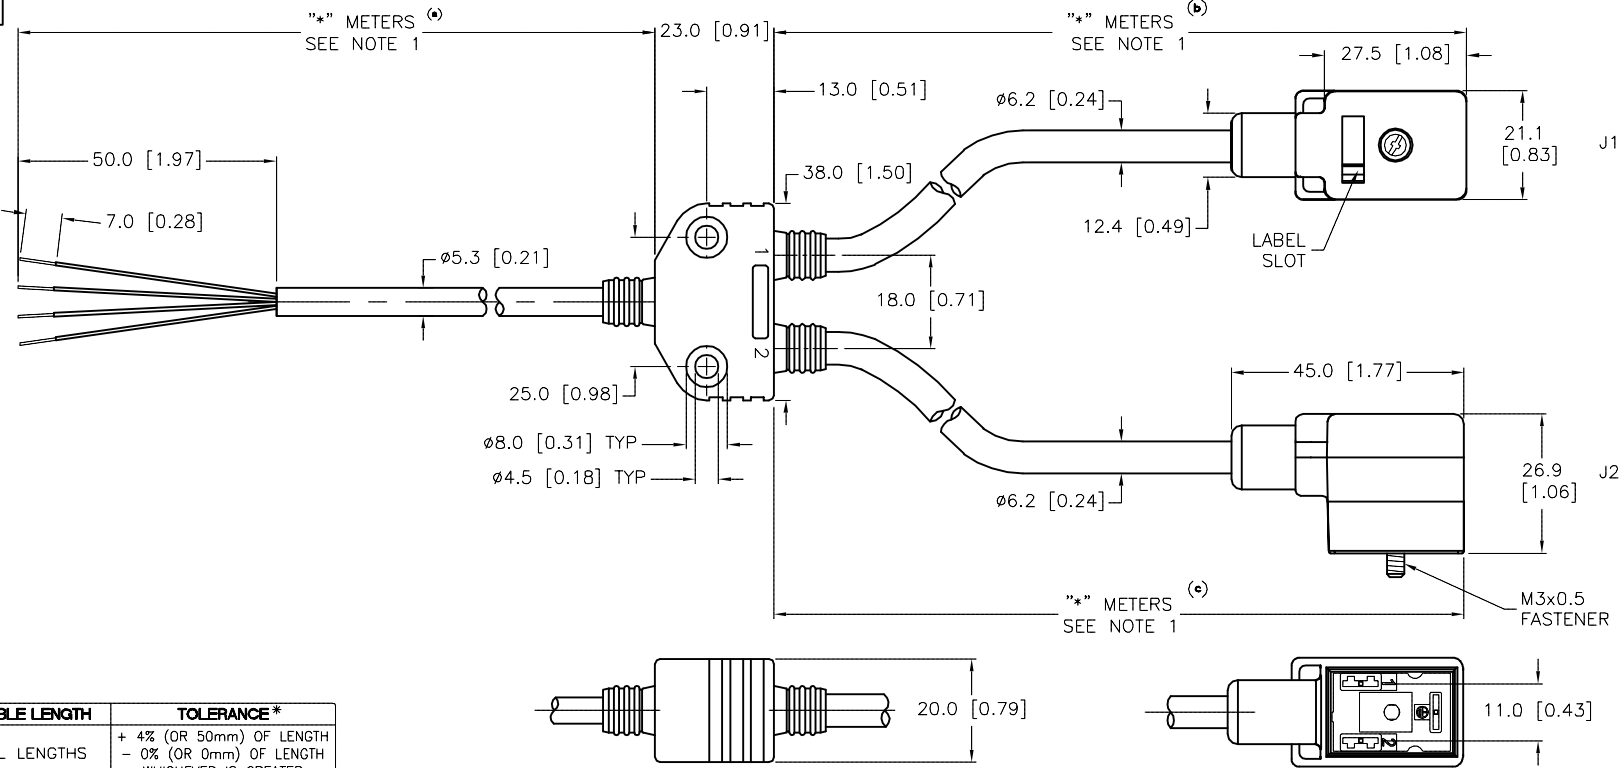


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S1226" DESIGNATES CUSTOM WIRING.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DOCUMENT IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (612) 553-7300 (612) 553-0708 fax www.turck.com	
1. 2. 3. 4.						DRFT RDS		DATE 07/21/14	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD D.C.		SCALE 1=1.5	
FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION (a) (b) (c) VB2-*/2VIS 2-A653-*/*/S1226	
								IDENTIFICATION NO.	
								REV A	
A DRAWING RELEASE				KMY 07/31/14				DO NOT SCALE THIS DRAWING	
REV DESCRIPTION				BY DATE ECO NO.				FILE: 777033663	
								SHEET 1 OF 1	