


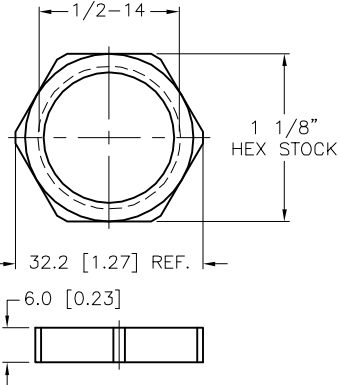
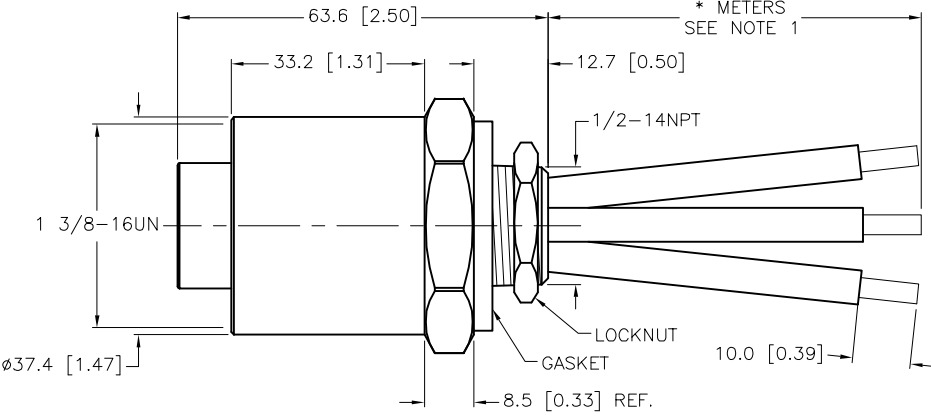


FEMALE END VIEW	PANEL CUTOUT	LOCKNUT	SPECIFICATIONS																									
 1 = RED 2 = GREEN/YELLOW 3 = WHITE 			<table><tr><td>CONTACT CARRIER MATERIAL</td><td>PVC</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS or COPPER/GOLD</td></tr><tr><td>HOUSING MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>GASKET MATERIAL</td><td>NITRILE (BUNA-N)</td></tr><tr><td>RATED CURRENT [A]</td><td>40.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>600 VAC</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBERS OF CONDUCTORS [AWG]</td><td>3x10 AWG</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K</td></tr><tr><td>MAXIMUM PANEL THICKNESS</td><td>6.0mm [.236]</td></tr><tr><td>APPROVALS AND CERTIFICATIONS</td><td>UL 2237, CE</td></tr></table>	CONTACT CARRIER MATERIAL	PVC	CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD	HOUSING MATERIAL/PLATING	BRASS/NICKEL	GASKET MATERIAL	NITRILE (BUNA-N)	RATED CURRENT [A]	40.0 A	RATED VOLTAGE [V]	600 VAC	CONDUCTOR INSULATION MATERIAL	PVC	NUMBERS OF CONDUCTORS [AWG]	3x10 AWG	TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K	MAXIMUM PANEL THICKNESS	6.0mm [.236]	APPROVALS AND CERTIFICATIONS	UL 2237, CE	
CONTACT CARRIER MATERIAL	PVC																											
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD																											
HOUSING MATERIAL/PLATING	BRASS/NICKEL																											
GASKET MATERIAL	NITRILE (BUNA-N)																											
RATED CURRENT [A]	40.0 A																											
RATED VOLTAGE [V]	600 VAC																											
CONDUCTOR INSULATION MATERIAL	PVC																											
NUMBERS OF CONDUCTORS [AWG]	3x10 AWG																											
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)																											
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K																											
MAXIMUM PANEL THICKNESS	6.0mm [.236]																											
APPROVALS AND CERTIFICATIONS	UL 2237, CE																											

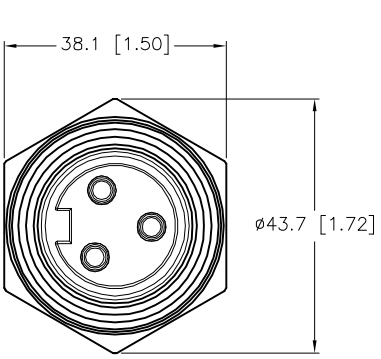


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

**CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
- "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/S1204" DESIGNATES CUSTOM COLOR CODE.

E	UPDATE RATED CURRENT	NF	04/25/19	69361
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
1. 2. 3. 4.								
MATERIAL		DRFT	KMY	DATE	07/22/14	DESCRIPTION GKDF 30-*M/14.5/NPT/S1204		
SEE SPECIFICATIONS		APVD	L.H.	SCALE	1 = 1.3			
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV
SEE SPECIFICATIONS						CONTACT TURCK FOR MORE INFORMATION		E
		DO NOT SCALE THIS DRAWING				FILE: 777033727		SHEET 1 OF 1