




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	TPV
				MOLDED HEAD MATERIAL/COLOR	TPV/WHITE
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				RATED CURRENT [A]	4.0 A
				RATED VOLTAGE [V]	250 V
				OUTER JACKET MATERIAL/COLOR	TPV/WHITE
				CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
				NUMBER OF CONDUCTORS [AWG]	4x22 AWG
				DRAIN/SHIELD	24 AWG/AL MYLAR FOIL SHIELD
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

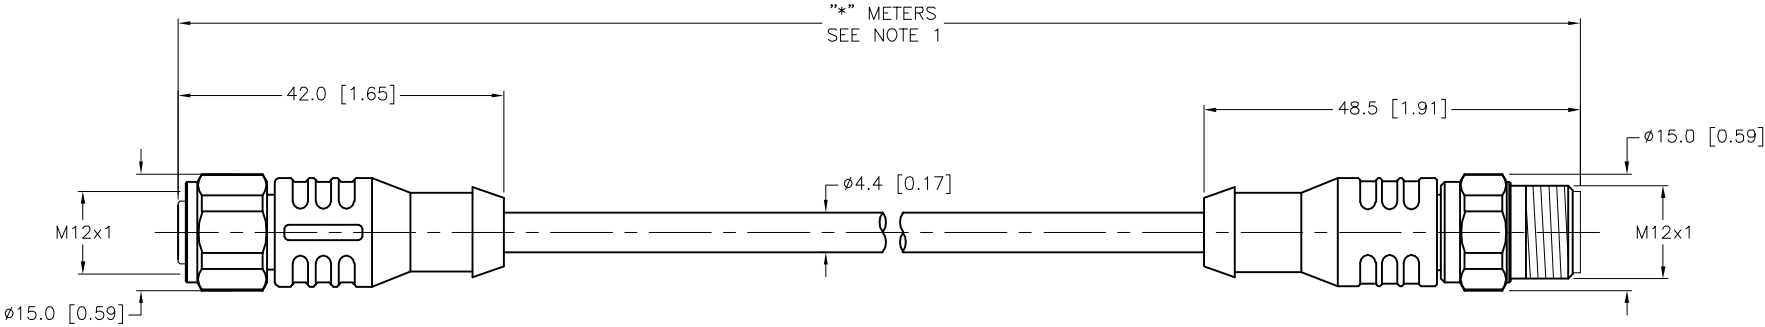


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S653" DESIGNATES DRAIN WIRE TO PIN-5.
- "/S1579" DESIGNATES NO FLAG LABEL, BAG LABEL ONLY.

C	UPDATE MATERIAL SPECIFICATIONS	NF	07/21/15	50670
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us TURCK			
							
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	KMY	DATE	08/20/14	DESCRIPTION	
SEE SPECIFICATIONS		APVD	L.H.	SCALE	1=1.0	WD-RKCV 4.5T-*--RSCV 4.5T/S653/S1579	
		UNIT OF MEASUREMENT				IDENTIFICATION NO.	
		MILLIMETER [INCH]				REV	
FINISH	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING				FILE: 777033814	
SEE SPECIFICATIONS						SHEET 1 OF 1	