
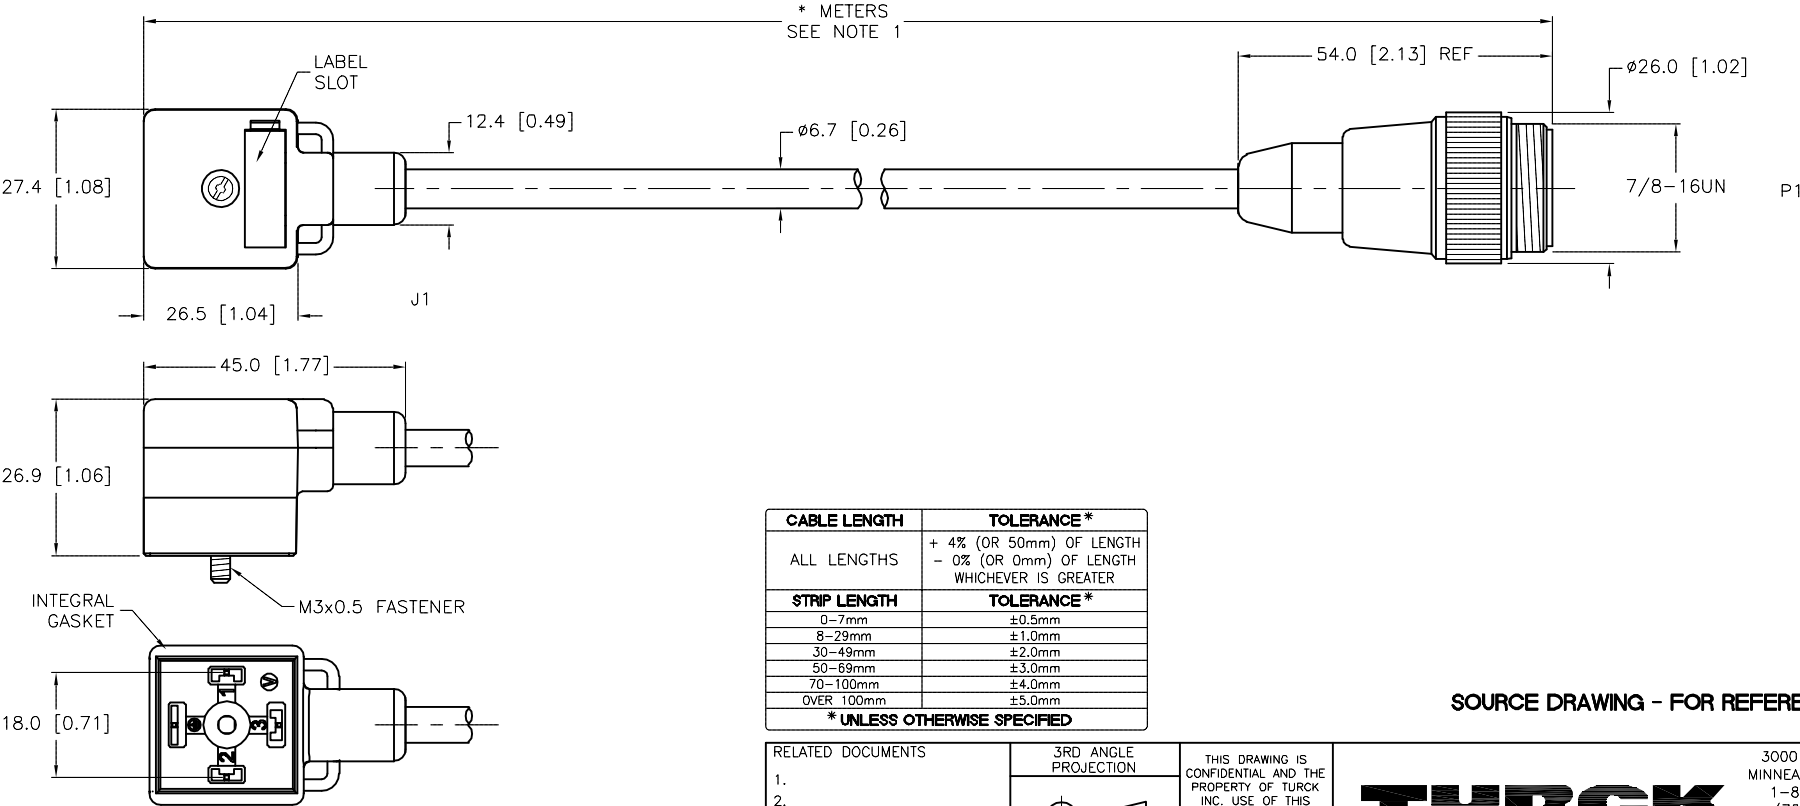


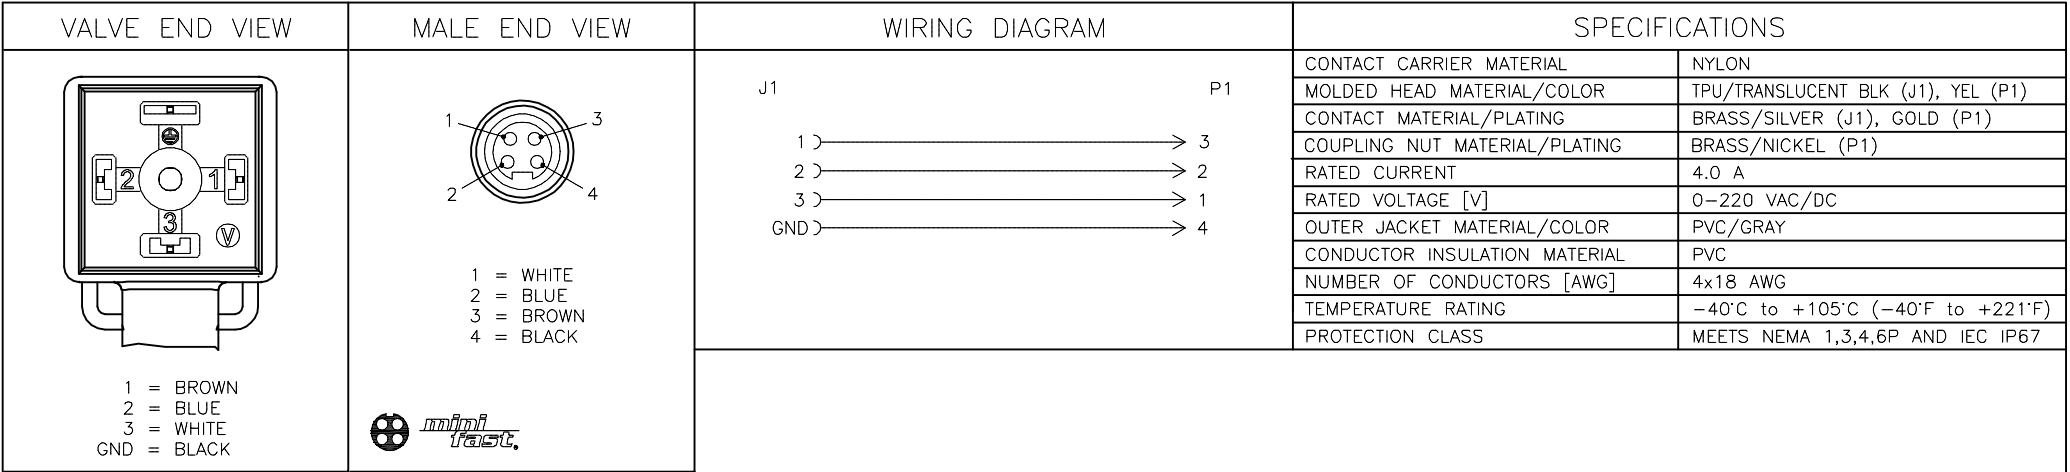

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/S1271" DESIGNATES PINS 1 & 3 FLIPPED ON MINIFAST END.

A	DRAWING RELEASE	RDS	09/08/14	
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.				
2.				
3.				
4.				
MATERIAL	SEE SPECIFICATIONS	DRFT RDS	DATE 08/28/14	DESCRIPTION
FINISH	SEE SPECIFICATIONS	APVD C.K.	SCALE 1=1.3	VAS 3-A580-*M-RSM 40/S1271
		UNIT OF MEASUREMENT		IDENTIFICATION NO.
		MILLIMETER [INCH]		REV
		DO NOT SCALE THIS DRAWING		A
		FILE: 777033864		SHEET 1 OF 1