


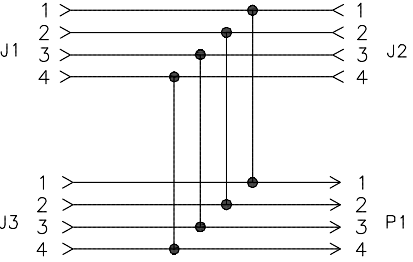


MALE END VIEW (P1)	FEMALE END VIEW (J1-J3)	WIRING DIAGRAM	SPECIFICATIONS	
 1 = WHITE 2 = GREEN/YELLOW 3 = BLACK 4 = RED  M16 connector	  M16 connector		MOLDED BODY MATERIAL/COLOR	TPU/BLACK
			CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
			CONTACT MATERIAL/PLATING	BRASS/GOLD(P1), TECU/GOLD(J1-J3)
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	15.0 A
			RATED VOLTAGE [V]	600 VAC/VDC
			OUTER JACKET MATERIAL/COLOR	PVC/BLACK
			CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
			NUMBER OF CONDUCTORS [AWG]	4x14 AWG
			TEMPERATURE RANGE	-40°C TO +90°C (-40°F TO +194°F)
			PROTECTION CLASS	MEETS IEC IP67

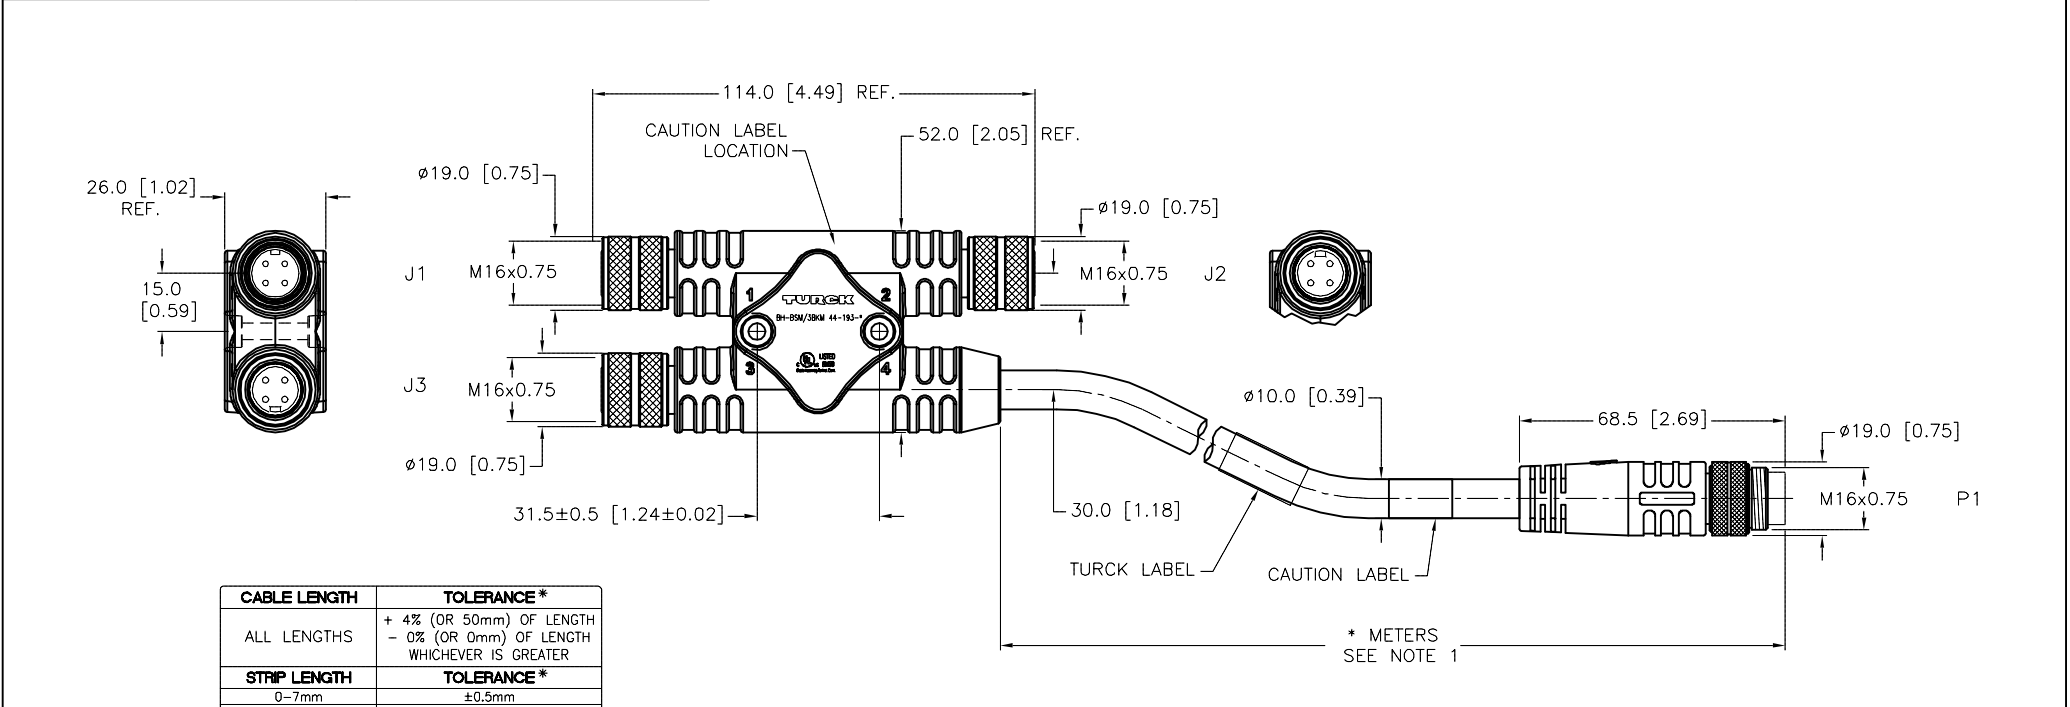

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

**CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

* UNLESS OTHERWISE SPECIFIED

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

⚠

CAUTION:

RISK OF ELECTRICAL SHOCK

DO NOT DISCONNECT UNDER LOAD

C	UPDATED GRN CONDUCTOR TO GRN/YEL PER ECO	TV	08/15/17	60452
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
1.		TURCK			
2.					
3.					
4.					
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT KMY	DATE 08/01/14	DESCRIPTION BH-3BKM/BSM 44-193-*	
SEE SPECIFICATIONS		APVD C.K.	SCALE 1=2.0		
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT		IDENTIFICATION NO.	
SEE SPECIFICATIONS		MILLIMETERS		REV C	
DO NOT SCALE THIS DRAWING		FILE: 777033914		SHEET 1 OF 1	