


VALVE END VIEW




1 = BLACK
2 = WHITE
GND = RED

WIRING DIAGRAM

VALVE


P1

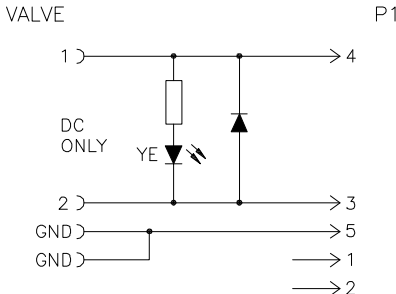

DC ONLY
YE

1 = N/C
2 = N/C
3 = WHITE
4 = BLACK
5 = RED

MALE END VIEW




1 = N/C
2 = N/C
3 = WHITE
4 = BLACK
5 = RED




SPECIFICATIONS


CONTACT CARRIER MATERIAL	NYLON or TPU
CONTACT MATERIAL/PLATING	BRASS/SILVER (VALVE), BRASS/GOLD (P1)
MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT YEL (VALVE), YEL (P1)
COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL
RATED CURRENT	4.0 A
RATED VOLTAGE	24-48 V
OUTER JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION	PVC
NUMBER OF CONDUCTORS	3x18 AWG
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

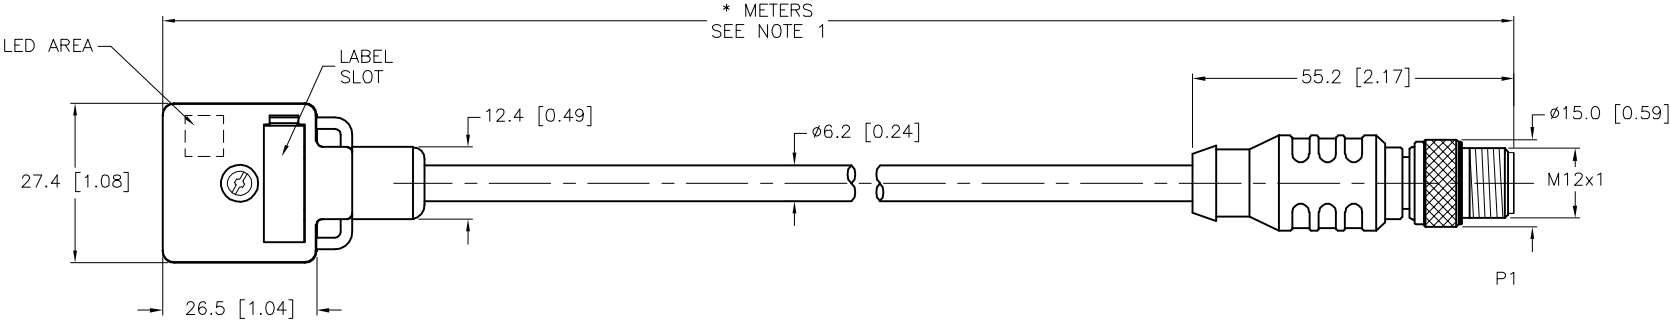

LED AREA
LABEL SLOT
12.4 [0.49]
27.4 [1.08]
26.5 [1.04]
6.2 [0.24]
55.2 [2.17]
15.0 [0.59]
12x1
P1

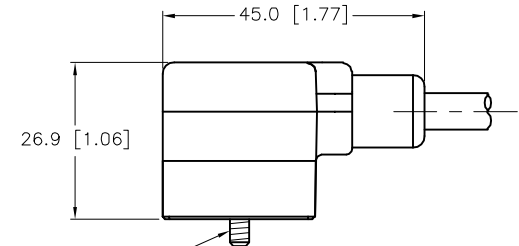

45.0 [1.77]
26.9 [1.06]
M3x0.5 FASTENER

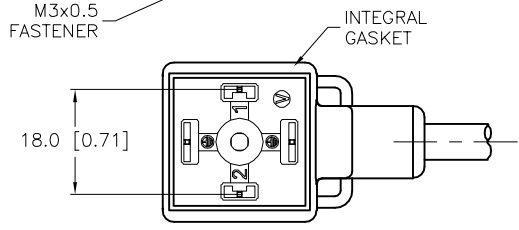

18.0 [0.71]
INTEGRAL GASKET

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS

1.
2.
3.
4.


MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

3RD ANGLE PROJECTION



ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RDS
APVD M.A.

DATE 09/23/14
SCALE 1=1.3

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

TURCK

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

DESCRIPTION

VAY 22-F247-*M-RSE 5.3T

IDENTIFICATION NO.

REV
A

FILE: 777033984

SHEET 1 OF 1