



SPECIFICATIONS					
CONTACT CARRIER MATERIAL	TPU				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
HOUSING MATERIAL/PLATING	BRASS/NICKEL				
GASKET MATERIAL	NEOPRENE				
RATED CURRENT [A]	9.0 A				
RATED VOLTAGE [V]	600 V				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBER OF CONDUCTORS [AWG]	2x18 AWG				
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K				



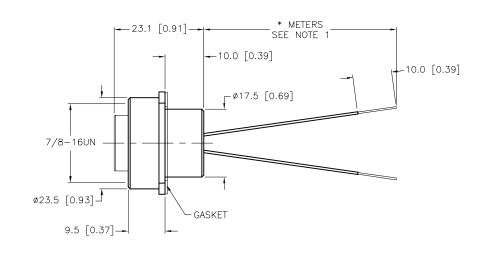

CABLE LENGTH	TOLERANCE*				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE *				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNILESS OTHERWISE SPECIFIED					

NOTES:

1. $\ensuremath{^{"*"}}$ indicates lead length in meters. Contact turck to order specific lengths.

D	UPDATE PROTECTION CLASS	СВМ	04/13/21	76628
REV	DESCRIPTION	BY	DATE	ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		IRC		3000 CAN MINNEAPOLI 1–800– (763) 5 (763) 5 www.t	S, MN 544-7 553-7	55441 769 300 708 fax
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT RDS APVD L.H.	DATE 10/07/14 SCALE 1=1.0	DESCRIPTION	RKFF 20	-*M		
		UNIT OF MEASUREMENT		IDENTIFICATION NO.			I	REV
TINGIT		MILLIMETER [INCH]						D
			DO NOT SCALE THIS DRAWING			Ç	SHEET	1 OF 1