



FEMALE END VIEW



A = YEL & BLK
B = VIO & GRN/YEL
C = BRN & ORG
D = WHITE
E = GRAY
F = BLUE

CONNECTOR
TYPE/STYLE - MS 3108A
SHELL SIZE - 20
INSERT ARRANGEMENT - 17S


MALE END VIEW



1 = YELLOW
2 = VIOLET
3 = BROWN
4 = WHITE
5 = GRAY
6 = BLUE
7 = BLACK
8 = GREEN/YELLOW
9 = ORANGE
GND = N/C

CONNECTOR
TYPE/STYLE - GT08
SHELL SIZE - 18
INSERT ARRANGEMENT - 1P

SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NEOPRENE
CONTACT MATERIAL/PLATING	COPPER ALLOY/SILVER
OUTER JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS	10x18 AWG
DRAIN/SHIELD	20 AWG DRAIN/ALUM.-POLYESTER FOIL
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)

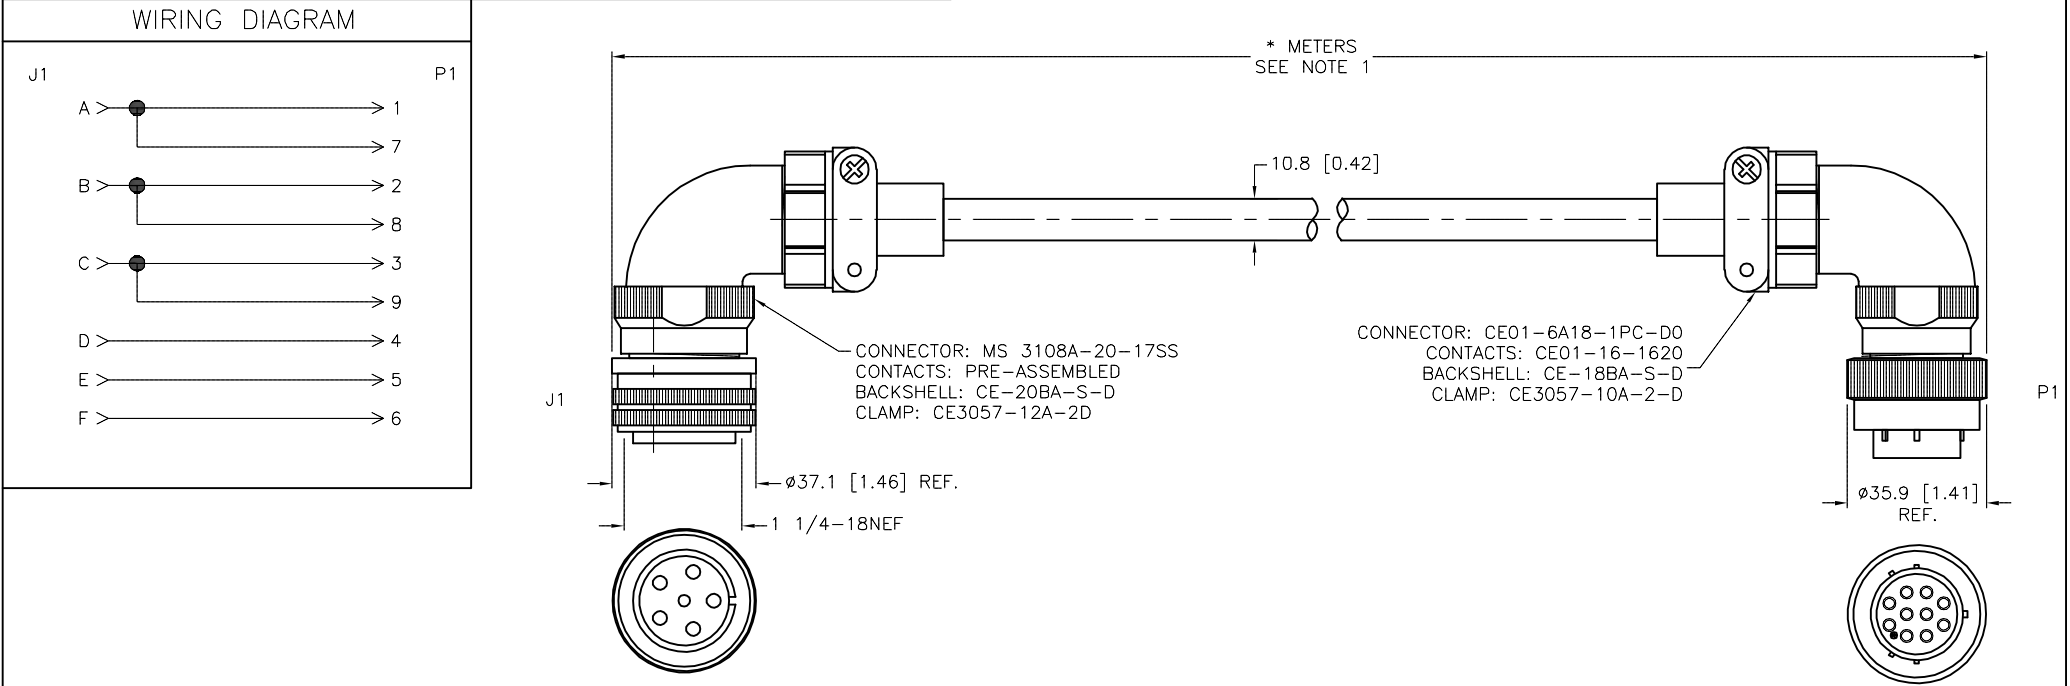

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

- NOTES:
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.
2. UNUSED RED CONDUCTOR TRIMMED BACK TO CABLE JACKET ON BOTH ENDS.

B	UPDATE CONDUCTOR COLOR	NF	07/10/17	606065
REV	DESCRIPTION	BY	DATE	ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

1.
2.
3.
4.


MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

3RD ANGLE PROJECTION



ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT KMY
APVD C.K.

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

TURCK

DATE 10/13/14
SCALE 1=2.0

DESCRIPTION
MS 3108A-20-17S-0553-* -GT08F-18-1P

IDENTIFICATION NO.

REV
B