

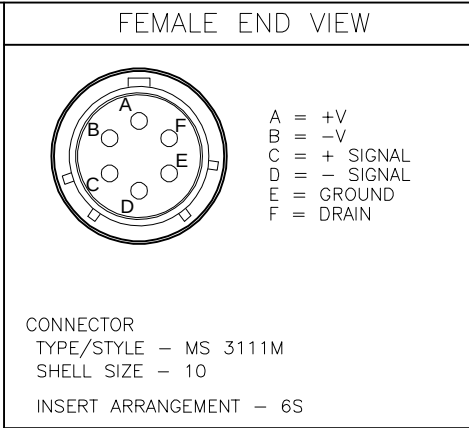


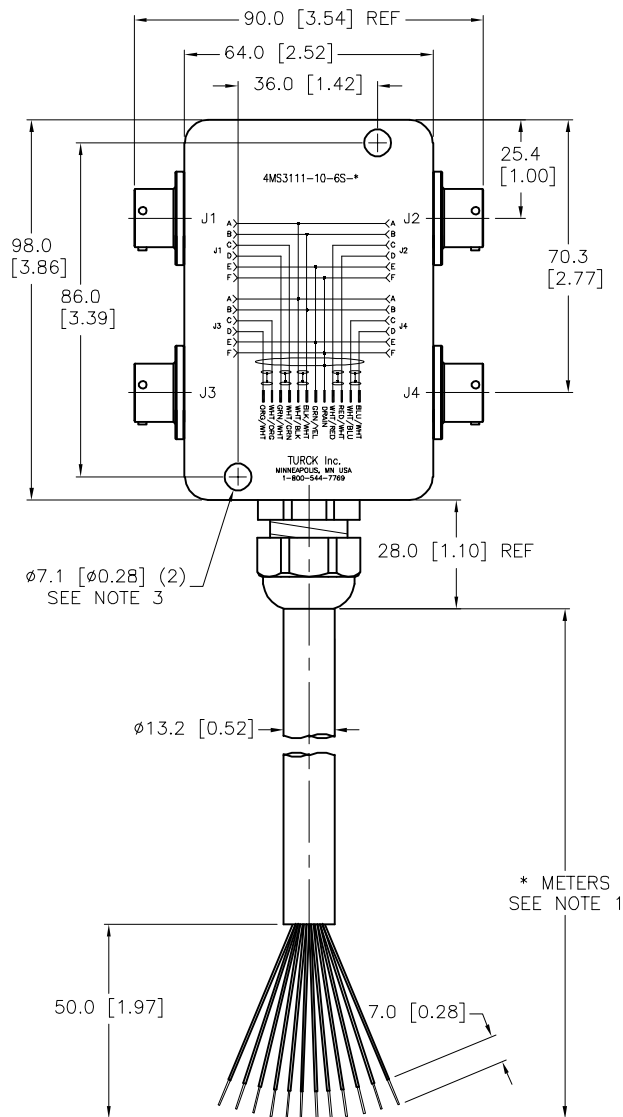

SPECIFICATIONS	
CABLE JACKET/COLOR	PVC/BLACK
NUMBER OF CONDUCTORS [AWG]	10x18 AWG, 1x18 AWG GROUND
CONDUCTOR ARRANGEMENT	5 SHIELDED TWISTED PAIRS W/ DRAIN, 1 GND, 1 DRAIN
DRAIN/SHIELD	6x20 AWG DRAINS/ALUMINUM MYLAR SHIELD
HOUSING MATERIAL	ALUMINUM ALLOY
HOUSING FINISH/COLOR	EPOXY/BLACK
CONTACT CARRIERS	NEOPRENE
CONTACTS	COPPER ALLOY/GOLD
OPERATING VOLTAGE	300 V
OPERATING CURRENT	5.6 A PER PORT, 7.5 A TOTAL
PROTECTION CLASS	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to 90°C (-40°F to 194°F)

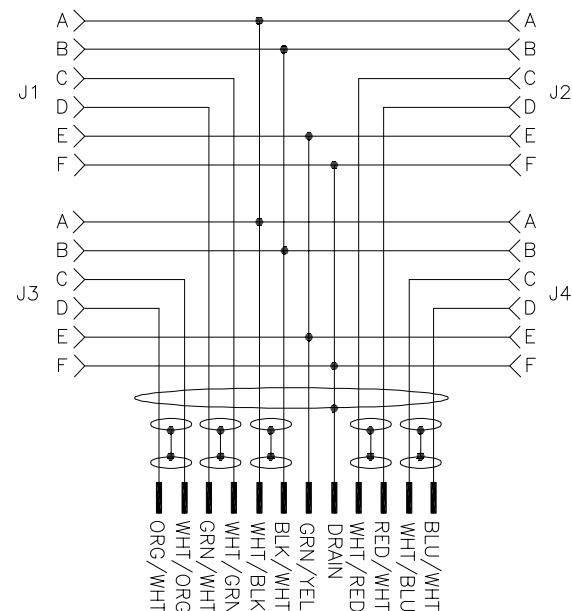


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- BOX HEIGHT IS 1.36 [34.5] NOMINAL.
- CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (NOT INCLUDED).
- KEYWAY ORIENTATION FOR J1-J4 MAY VARY AND IS NOT CRITICAL.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	NF	DATE	03/09/15	DESCRIPTION 4MS3111-10-6S-*			
FINISH SEE SPECIFICATIONS		APVD	J.B.	SCALE	1=2.0				
		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV D	
		DO NOT SCALE THIS DRAWING							
	CONTACT TURCK FOR MORE INFORMATION	FILE: 777034244				SHEET 1 OF 1			

D	UPDATE DESCRIPTIONS	RDS	01/07/22	77354
REV	DESCRIPTION	BY	DATE	ECO NO.