






WRJ45ES END VIEW	MALE END VIEW	MOUNTING HOLE	SPECIFICATIONS	
 12345678 1 = YELLOW (+TD) 2 = ORANGE (-TD) 3 = WHITE (+RD) 4 = N/C 5 = N/C 6 = BLUE (-RD) 7 = N/C 8 = N/C 	 1 = YELLOW (+TD) 2 = WHITE (+RD) 3 = ORANGE (-TD) 4 = BLUE (-RD)  		CONTACT CARRIER MATERIAL (P2)	TPU
			MOLDED HEAD MATERIAL/COLOR (P2)	TPU/BLACK
			CONTACT MATERIAL/PLATING (P2)	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING (P2)	BRASS/NICKEL
			CONTACT CARRIER MATERIAL (P1)	POLYCARBONATE
			MOLDED HEAD MATERIAL/COLOR (P1)	TPU/BLACK
			CONTACT MATERIAL/PLATING (P1)	BRONZE/GOLD
			RATED CURRENT [A]	1.5 A
			RATED VOLTAGE [V]	42 V
			OUTER CABLE JACKET MATERIAL/COLOR	TPE/BRIGHT GREEN
			CONDUCTOR INSULATION MATERIAL	HDPE
			NUMBER OF CONDUCTORS [AWG]	4x22 AWG, STRANDED, CAT 5E
			SHIELDING	ALUM.-POLYESTER FOIL & T-C BRAIDED
			TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
			PROTECTION CLASS	MEETS IEC IP67 (RJ45/IP20)
			MAX. PANEL THICKNESS	3.0mm [0.12"]

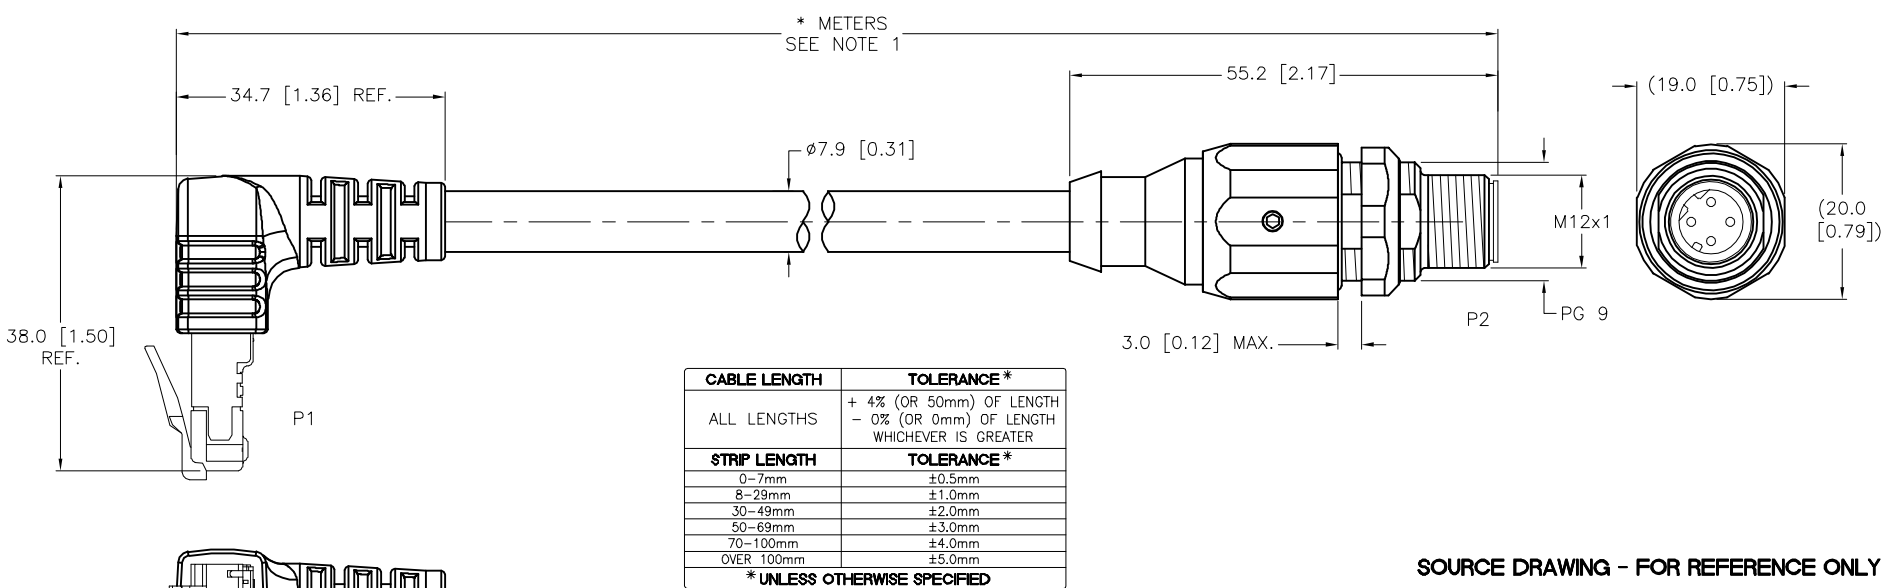

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

 NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
					1.										
					2.										
					3.										
4.		MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		RDS		DATE 11/13/14		DESCRIPTION WRJ45ES FSSDED 423-*M			
						APVD		L.H.		SCALE 1=1.0					
				FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT				IDENTIFICATION NO.		REV B	
								MILLIMETER [INCH]							
								DO NOT SCALE THIS DRAWING				FILE: 777034271			
B		UPDATE CABLE OD		ER		10/23/18		64291							
REV		DESCRIPTION		BY		DATE		ECO NO.						SHEET 1 OF 1	