


MALE END VIEW




1 = BROWN
2 = WHITE
3 = BLUE
4 = BLACK
5 = DRAIN



SPECIFICATIONS

CONTACT CARRIER MATERIAL	TPV
MOLDED HEAD MATERIAL/COLOR	TPV/WHITE
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
CABLE JACKET MATERIAL/COLOR	TPV/WHITE
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
NUMBER OF CONDUCTORS [AWG]	4x22 AWG
DRAIN/SHIELD	24 AWG/ALUMINIZED FOIL
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K

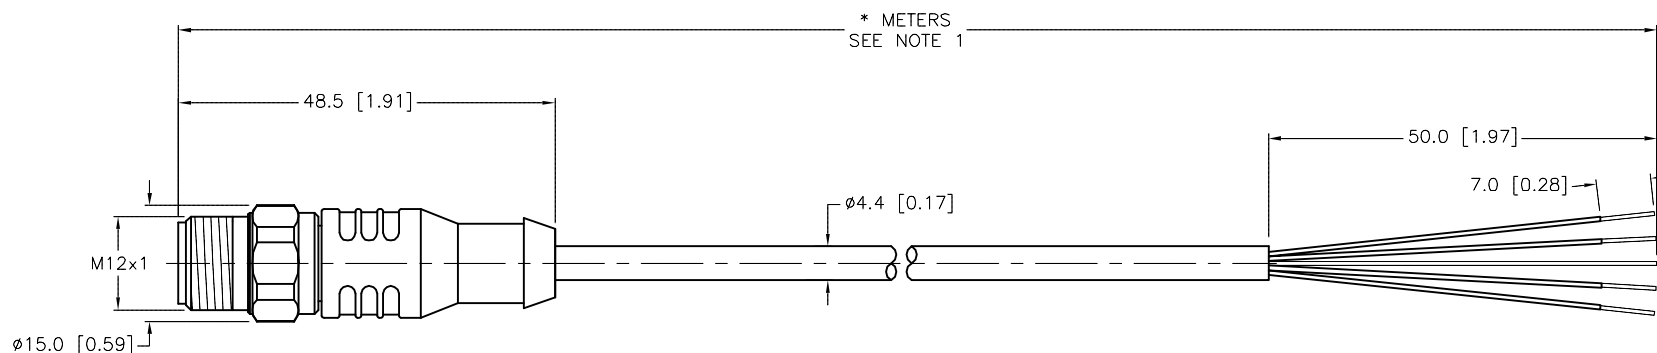

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	


NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S653" DESIGNATES SHIELDED CABLE WITH DRAIN WIRE. DRAIN IS CONNECTED TO A PIN AT THE PLUG.

3. "/S1579" DESIGNATES NO FLAG LABEL, BAG LABEL ONLY.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK INC <i>High Technology Sensors and Automation Controls</i> 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com						
								
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	12/12/14	DESCRIPTION WD-RSCV 4.5T-*/S653/S1579		
SEE SPECIFICATIONS		APVD	T.S.	SCALE	1=1.0			
FINISH		UNIT OF MEASUREMENT				IDENTIFICATION NO.		
SEE SPECIFICATIONS		MILLIMETER [INCH]						
		DO NOT SCALE THIS DRAWING				FILE: 777034405		
		CONTACT TURCK FOR MORE INFORMATION					REV	
							C	
						SHEET 1 OF 1		

C	UPDATE MATERIAL SPECIFICATIONS	NF	07/21/15	50670
REV	DESCRIPTION	BY	DATE	ECO NO.