


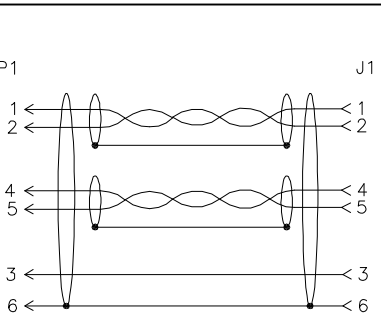


MALE END VIEW		FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS																															
(LONG)  PAIRED #1 < 1 = RED 2 = GREEN 3 = GREEN/YELLOW PAIRED #2 < 4 = WHITE 5 = BLACK 6 = DRAIN 		 PAIRED #1 < 1 = RED 2 = GREEN 3 = GREEN/YELLOW PAIRED #2 < 4 = WHITE 5 = BLACK 6 = DRAIN 				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/FINISH</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>RATED CURRENT [A]</td><td>8.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>600 V</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>EX60/GRAY</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>XLPE</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>5x18 AWG</td></tr><tr><td>DRAIN/SHIELD</td><td>3x20 AWG/FOIL (PAIRS), FOIL (OVERALL)</td></tr><tr><td>CONDUCTOR ARRANGEMENT</td><td>2 STP w/DRAIN, 1 GND, 1 DRAIN</td></tr><tr><td>TEMPERATURE RANGE</td><td>-60°C to +105°C (-76°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K</td></tr><tr><td>CABLE APPROVALS</td><td>UL: TC-ERDB/ITC-ERDB/PLTC-ERDB, 105C -40C COLD IMPACT; -60C COLD BEND CSA: CIC/TC, DIRECT BURIAL, 90C, 600V -40C COLD IMPACT; -60C COLD BEND</td></tr></table>		CONTACT CARRIER MATERIAL	TPU	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	RATED CURRENT [A]	8.0 A	RATED VOLTAGE [V]	600 V	OUTER CABLE JACKET MATERIAL/COLOR	EX60/GRAY	CONDUCTOR INSULATION MATERIAL	XLPE	NUMBER OF CONDUCTORS [AWG]	5x18 AWG	DRAIN/SHIELD	3x20 AWG/FOIL (PAIRS), FOIL (OVERALL)	CONDUCTOR ARRANGEMENT	2 STP w/DRAIN, 1 GND, 1 DRAIN	TEMPERATURE RANGE	-60°C to +105°C (-76°F to +221°F)	PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K	CABLE APPROVALS	UL: TC-ERDB/ITC-ERDB/PLTC-ERDB, 105C -40C COLD IMPACT; -60C COLD BEND CSA: CIC/TC, DIRECT BURIAL, 90C, 600V -40C COLD IMPACT; -60C COLD BEND
CONTACT CARRIER MATERIAL	TPU																																		
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK																																		
CONTACT MATERIAL/PLATING	BRASS/GOLD																																		
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED																																		
RATED CURRENT [A]	8.0 A																																		
RATED VOLTAGE [V]	600 V																																		
OUTER CABLE JACKET MATERIAL/COLOR	EX60/GRAY																																		
CONDUCTOR INSULATION MATERIAL	XLPE																																		
NUMBER OF CONDUCTORS [AWG]	5x18 AWG																																		
DRAIN/SHIELD	3x20 AWG/FOIL (PAIRS), FOIL (OVERALL)																																		
CONDUCTOR ARRANGEMENT	2 STP w/DRAIN, 1 GND, 1 DRAIN																																		
TEMPERATURE RANGE	-60°C to +105°C (-76°F to +221°F)																																		
PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K																																		
CABLE APPROVALS	UL: TC-ERDB/ITC-ERDB/PLTC-ERDB, 105C -40C COLD IMPACT; -60C COLD BEND CSA: CIC/TC, DIRECT BURIAL, 90C, 600V -40C COLD IMPACT; -60C COLD BEND																																		

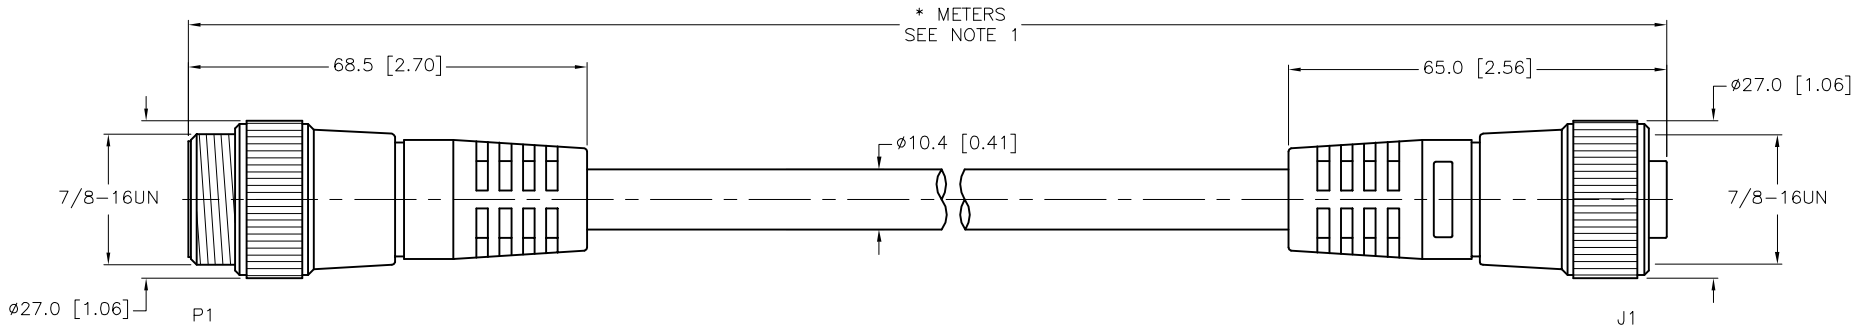


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT RDS APVD J.S.		DATE 02/09/15 SCALE 1=1.3	
MATERIAL		SEE SPECIFICATIONS		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION P-RSV RKV 664-2111XL-*M	
FINISH		SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.	
E		UPDATE PROTECTION CLASS		CBM		04/13/21	
REV		DESCRIPTION		BY		DATE	
						76628	
						ECO NO.	
						DO NOT SCALE THIS DRAWING	
						FILE: 777034683	
						SHEET 1 OF 1	