





FEMALE END VIEW	MALE END VIEW	TYP. PANEL CUTOUT	SPECIFICATIONS																											
 1 = BROWN 3 = BLUE 4 = BLACK 	 1 = BROWN 3 = BLUE 4 = BLACK 		<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR (P1)</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING (P1)</td><td>BRASS/NICKEL</td></tr><tr><td>HOUSING MATERIAL/PLATING (J1)</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>125 VAC/VDC</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>3x24 AWG</td></tr><tr><td>DRAIN/SHIELD</td><td>26 AWG/ALUMINUM-POLYESTER FOIL</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +90°C (-40°F to +194°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR (P1)	TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL	HOUSING MATERIAL/PLATING (J1)	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	125 VAC/VDC	OUTER JACKET MATERIAL/COLOR	TPU/BLACK	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	3x24 AWG	DRAIN/SHIELD	26 AWG/ALUMINUM-POLYESTER FOIL	TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	
CONTACT CARRIER MATERIAL	NYLON OR TPU																													
MOLDED HEAD MATERIAL/COLOR (P1)	TPU/YELLOW																													
CONTACT MATERIAL/PLATING	BRASS/GOLD																													
COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL																													
HOUSING MATERIAL/PLATING (J1)	BRASS/NICKEL																													
RATED CURRENT [A]	4.0 A																													
RATED VOLTAGE [V]	125 VAC/VDC																													
OUTER JACKET MATERIAL/COLOR	TPU/BLACK																													
CONDUCTOR INSULATION MATERIAL	PVC																													
NUMBER OF CONDUCTORS [AWG]	3x24 AWG																													
DRAIN/SHIELD	26 AWG/ALUMINUM-POLYESTER FOIL																													
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)																													
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																													

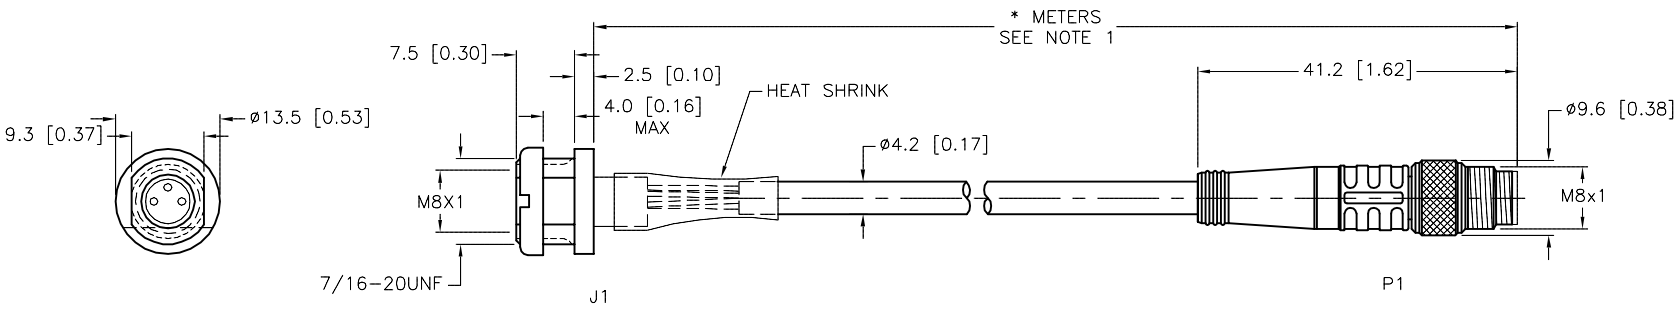


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE.
3. "/S618" DESIGNATES CABLE WITH FOIL SHIELD AND DRAIN. DRAIN IS NOT CONNECTED AT THE CONNECTOR.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							TURCK			
MATERIAL					DRFT RDS		DATE 02/12/15		DESCRIPTION	
SEE SPECIFICATIONS					APVD L.H.		SCALE 1=1.0		MFKS 3F-*--PSG 3M/S90/S618	
FINISH					UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]		B	
DO NOT SCALE THIS DRAWING					FILE: 777034691		SHEET 1 OF 1			

B	ADD PANEL CUTOUT	RDS	02/24/20	75679
REV	DESCRIPTION	BY	DATE	ECO NO.