





FEMALE END VIEW	MALE END VIEW	TYP. PANEL CUTOUT	SPECIFICATIONS																											
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 	 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 		<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR (P1)</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING (P1)</td><td>BRASS/NICKEL</td></tr><tr><td>HOUSING MATERIAL/PLATING (J1)</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>2.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>125 VAC/VDC</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x26 AWG</td></tr><tr><td>DRAIN/SHIELD</td><td>26 AWG/ALUMINUM-POLYESTER FOIL</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +90°C (-40°F to +194°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR (P1)	TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL	HOUSING MATERIAL/PLATING (J1)	BRASS/NICKEL	RATED CURRENT [A]	2.0 A	RATED VOLTAGE [V]	125 VAC/VDC	OUTER JACKET MATERIAL/COLOR	TPU/BLACK	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	4x26 AWG	DRAIN/SHIELD	26 AWG/ALUMINUM-POLYESTER FOIL	TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	
CONTACT CARRIER MATERIAL	NYLON OR TPU																													
MOLDED HEAD MATERIAL/COLOR (P1)	TPU/YELLOW																													
CONTACT MATERIAL/PLATING	BRASS/GOLD																													
COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL																													
HOUSING MATERIAL/PLATING (J1)	BRASS/NICKEL																													
RATED CURRENT [A]	2.0 A																													
RATED VOLTAGE [V]	125 VAC/VDC																													
OUTER JACKET MATERIAL/COLOR	TPU/BLACK																													
CONDUCTOR INSULATION MATERIAL	PVC																													
NUMBER OF CONDUCTORS [AWG]	4x26 AWG																													
DRAIN/SHIELD	26 AWG/ALUMINUM-POLYESTER FOIL																													
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)																													
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																													

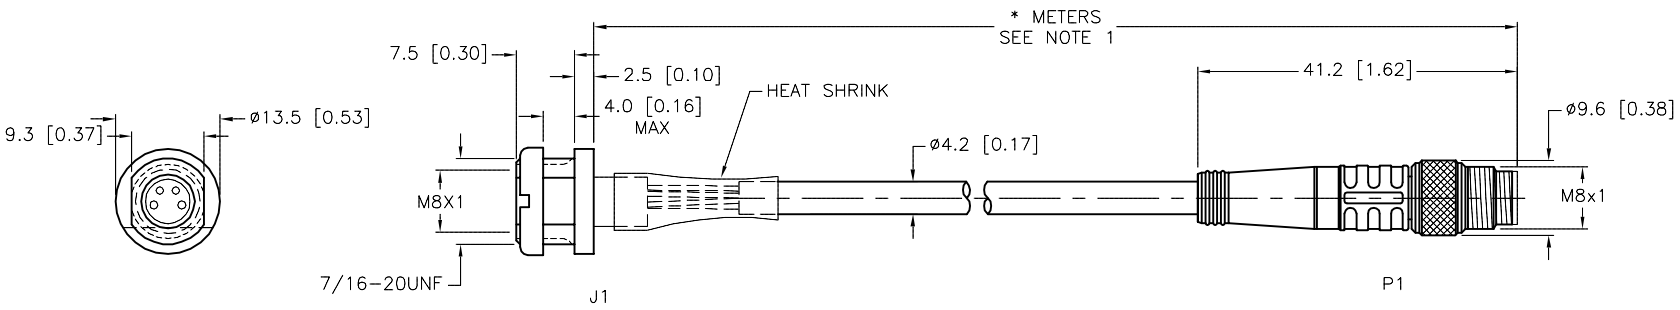


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 2. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE.
 3. "/S618" DESIGNATES CABLE WITH FOIL SHIELD AND DRAIN. DRAIN IS NOT CONNECTED AT THE CONNECTOR.

B	ADD PANEL CUTOUT	RDS	02/24/20	75679
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
	MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT RDS	DATE 10/30/14	DESCRIPTION MFKS 4F-*--PSG 4M/S90/S618
FINISH SEE SPECIFICATIONS	APVD J.S.		SCALE 1=1.0		
	UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING			IDENTIFICATION NO. REV B	
			FILE: 777034841		SHEET 1 OF 1