
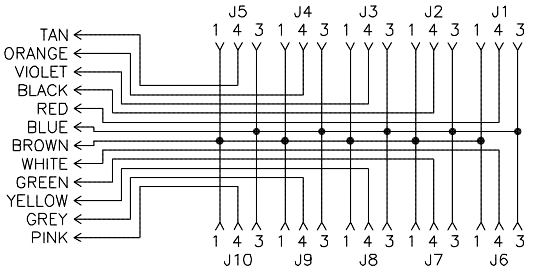



WIRING DIAGRAM		CONNECTORS (J1-J10)	SPECIFICATIONS	
			CABLE JACKET/COLOR	PVC/BLACK
			NUMBER OF CONDUCTORS [AWG]	12x24 AWG, FOIL SHIELD, 26 AWG DRAIN
			DRAIN/SHIELD	26 AWG/ALUM.-POLYESTER FOIL
			HOUSING MATERIAL/COLOR	NYLON/BLACK
			CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			OPERATING VOLTAGE	48 V AC/DC
			OPERATING CURRENT	2 AMPS PER PORT, 2 AMPS TOTAL
			PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
			OPERATING TEMPERATURE	-40°C to +85°C (-40°F to +185°F)

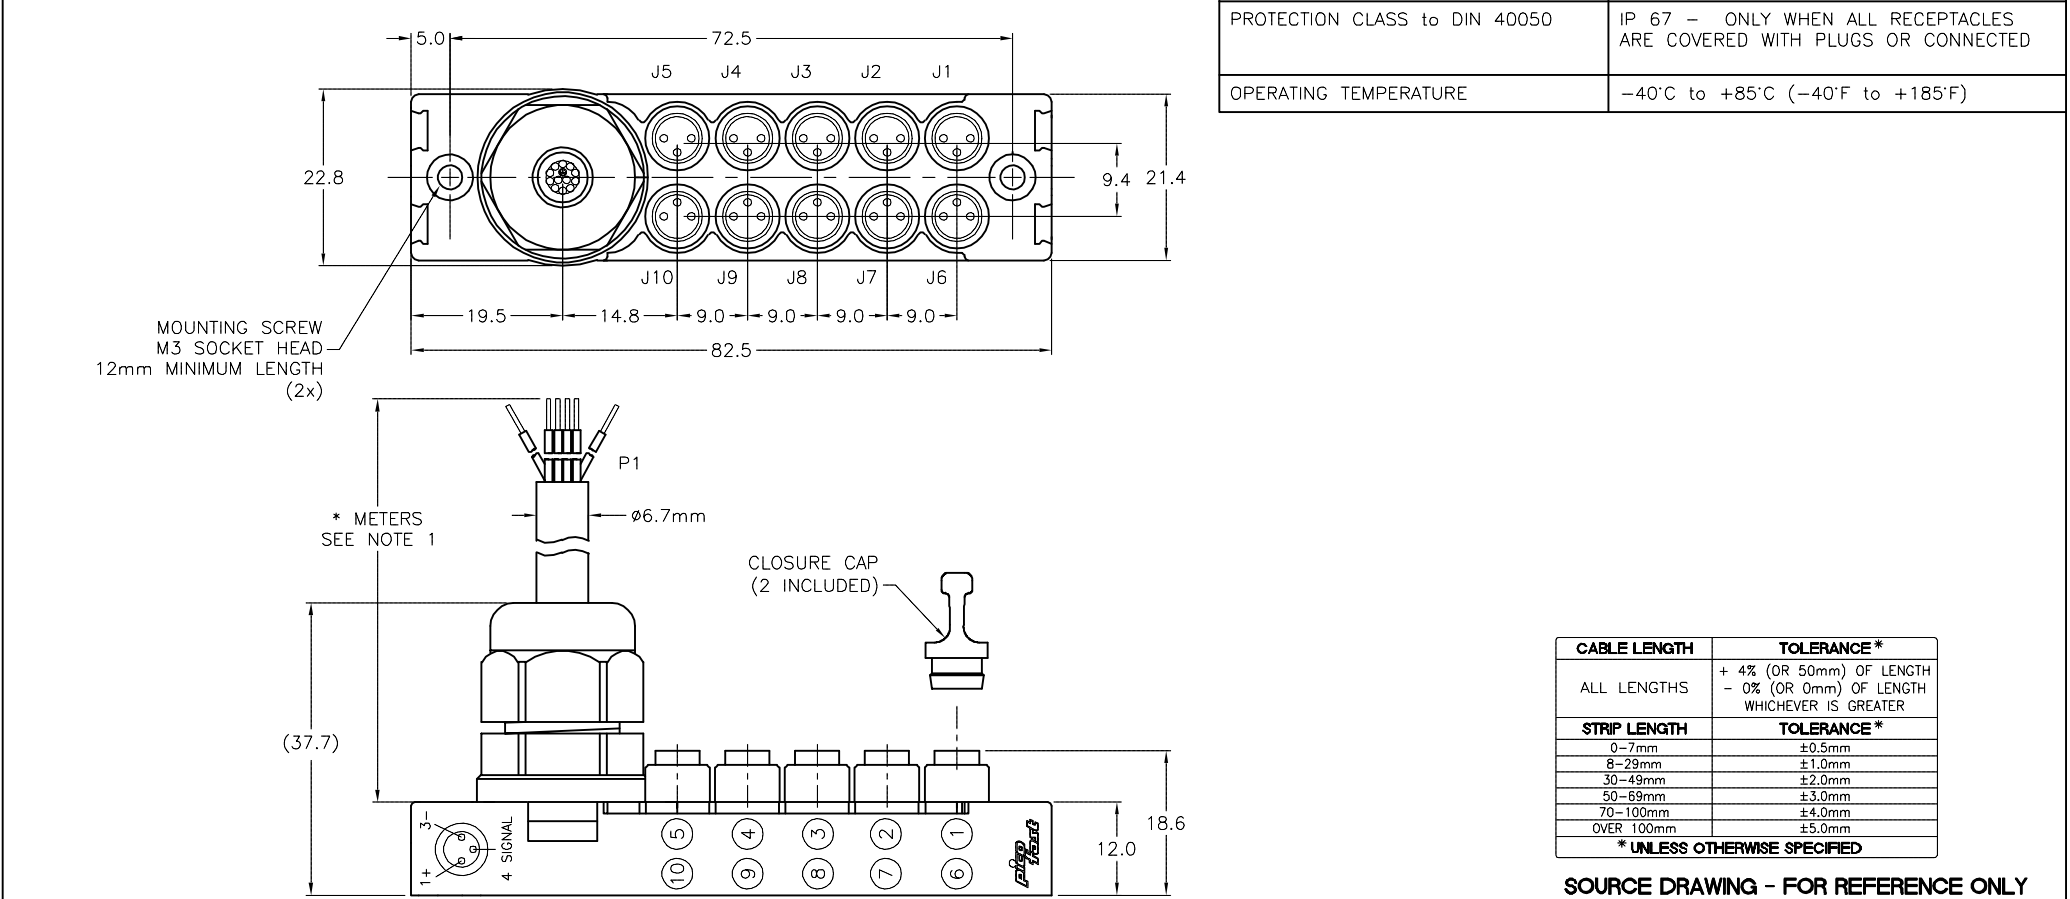


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S1579" DESIGNATES NO FLAG LABEL, BAG LABEL ONLY.

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS. 2. "/S1579" DESIGNATES NO FLAG LABEL, BAG LABEL ONLY.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
					1. 2. 3. 4.									
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY				DRFT RDS		DATE 04/02/15	
					SEE SPECIFICATIONS						APVD L.H.		SCALE 1 = 1.0	
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION								
SEE SPECIFICATIONS				MILLIMETERS		VB 1003-*/S1579								
						IDENTIFICATION NO.		REV						
								C						
C	ADD TOLERANCE BLOCK	NF	04/26/18	65103			DO NOT SCALE THIS DRAWING		FILE: 777035021		SHEET 1 OF 1			
REV	DESCRIPTION	BY	DATE	ECO NO.										