


MALE END VIEW




A = BLUE
B = BROWN

CONNECTOR
TYPE/STYLE - MS 3108M
SHELL SIZE - 12S
INSERT ARRANGEMENT - 3P

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NEOPRENE
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	COPPER ALLOY/SILVER
COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
MOLD SLEEVE	ALUMINUM/BLACK ANODIZED
RATED CURRENT [A]	11.0 A
RATED VOLTAGE [V]	300 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS	2x18 AWG
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
CONNECTOR TYPE	MIL-DTL-5015

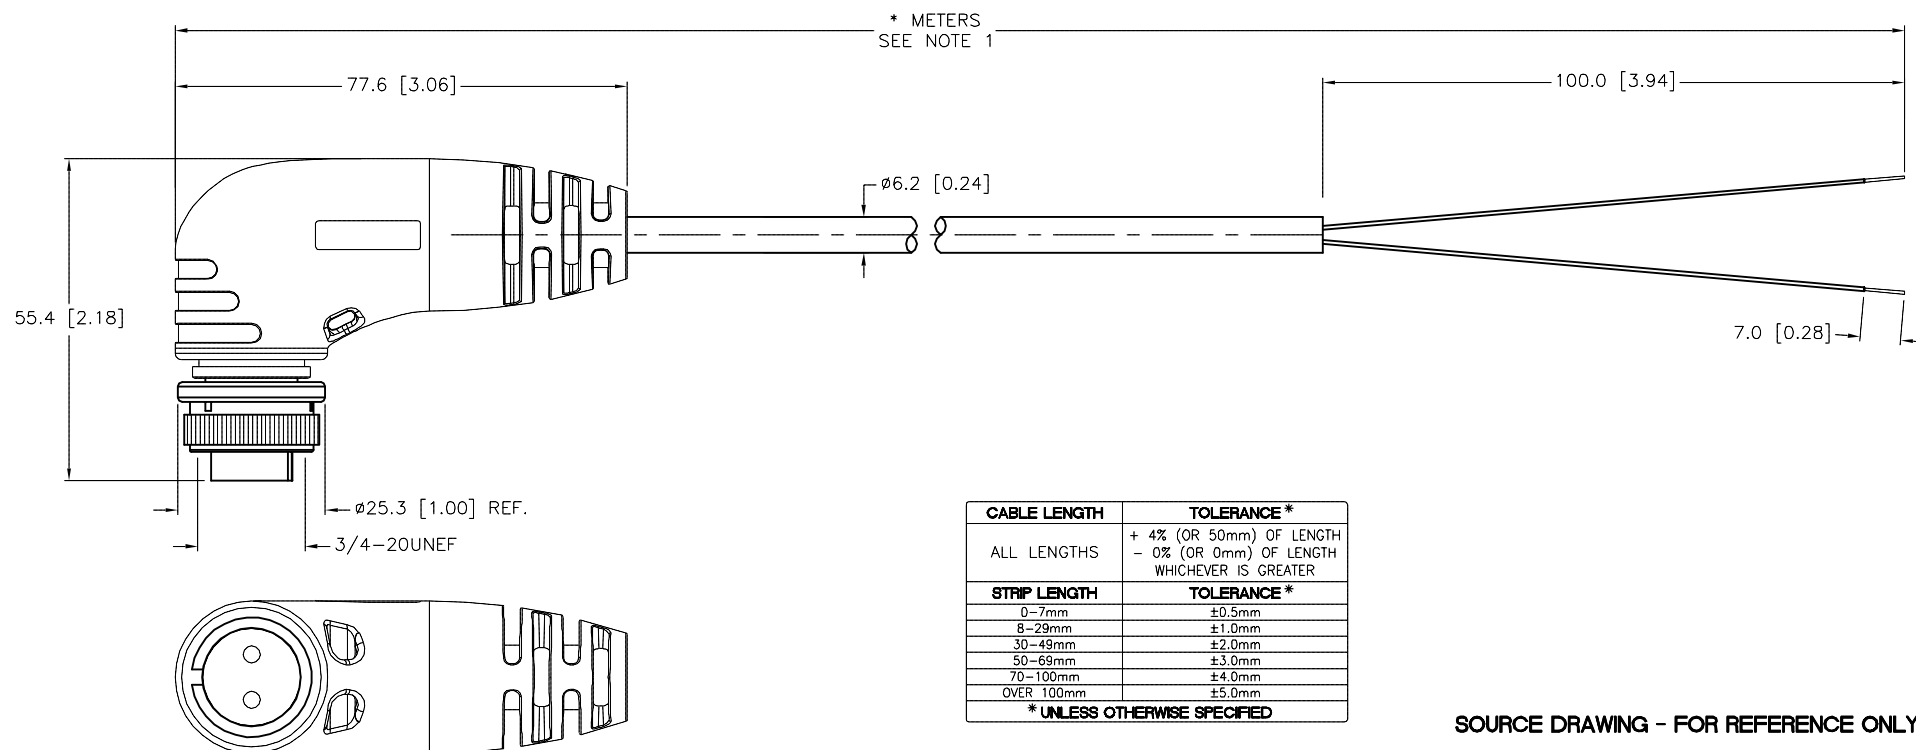

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. NOTE 2. PRELIMINARY 3. SPECIFICATIONS 4.				TURCK			
MATERIAL		DRFT NF		DATE 09/30/15		DESCRIPTION MS 3108M-12S-3P-511-*	
SEE SPECIFICATIONS		APVD		SCALE 1=1.3			
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV P1	
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: 777035078	
P1 DRAWING RELEASE PENDING		NF 09/30/15				SHEET 1 OF 1	
REV DESCRIPTION		BY DATE ECO NO.					