


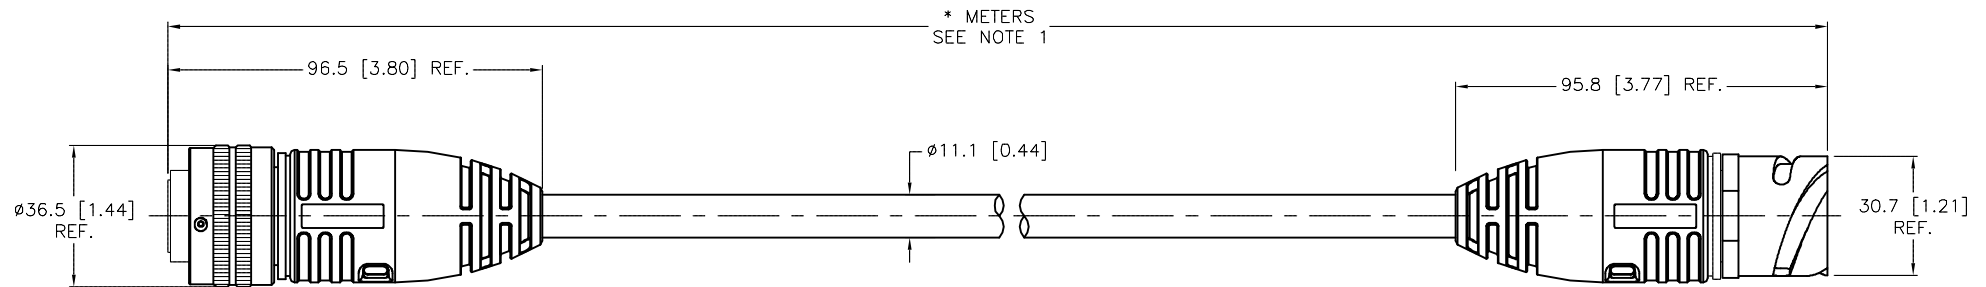


FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NEOPRENE
CONNECTOR TYPE/STYLE - GT06M SHELL SIZE - 18 INSERT ARRANGEMENT - 12S		CONNECTOR TYPE/STYLE - GT01M SHELL SIZE - 18 INSERT ARRANGEMENT - 12P		MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
				CONTACT MATERIAL/PLATING	COPPER ALLOY/SILVER
				COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
				MOLD SLEEVE	ALUMINUM/BLACK ANODIZED
				RATED CURRENT [A]	13.0 A
				RATED VOLTAGE [V]	500 V
				OUTER JACKET MATERIAL/COLOR	TPE/YELLOW
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS	6x16 AWG
				TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P & IEC IP67,IP68



CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.					RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
					MATERIAL SEE SPECIFICATIONS		DRFT NF APVD		DATE 03/18/15 SCALE 1=2.0		DESCRIPTION GT06M-18-12S-1716-* -GT01M-18-12P	
					FINISH SEE SPECIFICATIONS		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV E	
							CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: 777035082	
											SHEET 1 OF 1	

E	UPDATE END VIEWS	RDS	01/17/18	63857
REV	DESCRIPTION	BY	DATE	ECO NO.