





FEMALE END VIEW (J1)	MALE END VIEW (P1)	TYP. PANEL CUTOUT	SPECIFICATIONS	
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK	 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK	 ø15.3 [.602] 13.6 [.535]	CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT, HOUSING MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	2.0 A
			RATED VOLTAGE [V]	125 VAC/VDC
			OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	4x26 AWG
			TEMPERATURE RANGE	-30°C to +80°C (-22°F to +176°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
			MAX. PANEL THICKNESS	3.0 [.12]

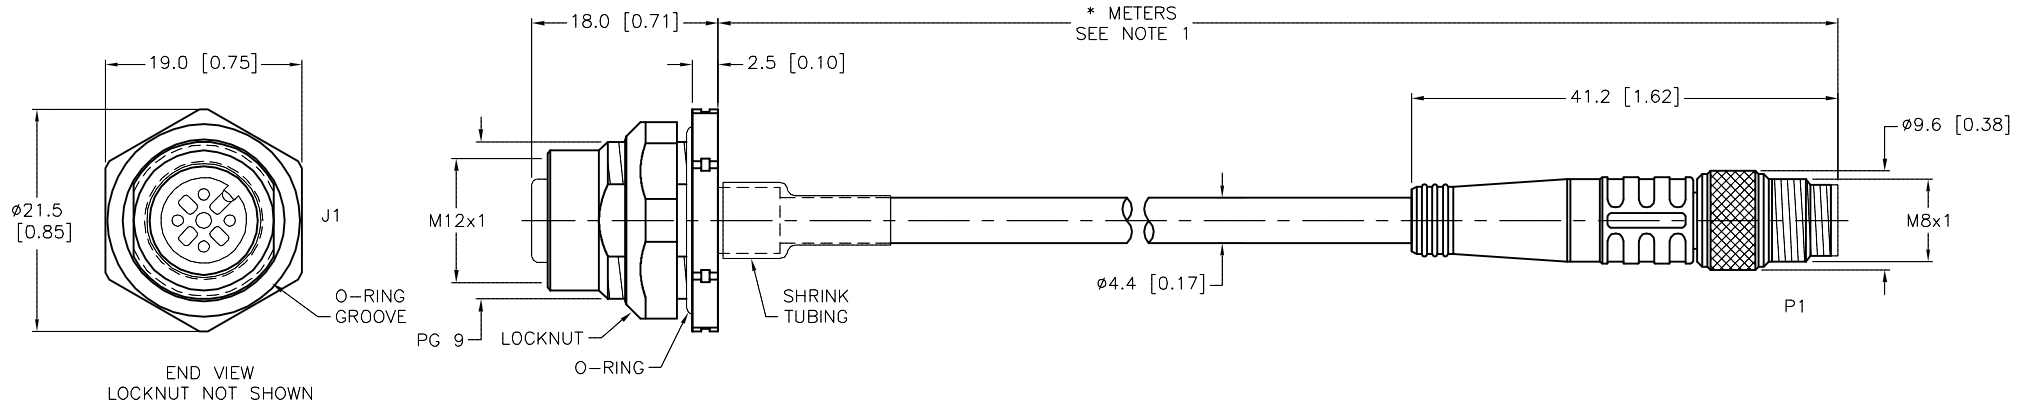


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
MATERIAL	SEE SPECIFICATIONS	DRFT	NF	DATE	04/06/15
FINISH	SEE SPECIFICATIONS	APVD	E.S.	SCALE	1=.8
		UNIT OF MEASUREMENT		DESCRIPTION	
		MILLIMETER [INCH]		FKFD 4.4--*--PSG 4M	
		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	REV
				FILE: 777035086	A
				SHEET 1 OF 1	

A	DRAWING RELEASE	NF	04/13/15	
REV	DESCRIPTION	BY	DATE	ECO NO.