



FEMALE END VIEW



1 = BLACK
2 = RED
3 = WHITE
4 = GREEN/YELLOW

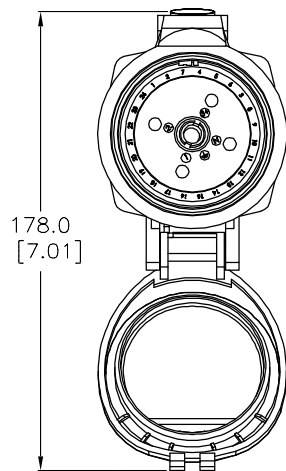


178.0
[7.01]


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SPECIFICATIONS

HOUSING MATERIAL/COLOR	PBT/BLUE
CONTACT MATERIAL/PLATING	NICKEL/SILVER
RATED CURRENT [A]	30.0 A
RATED VOLTAGE, MAXIMUM VOLTAGE [VAC]	480 VAC/600 VAC
CABLE GLAND MATERIAL	NYLON/BUNA-N (CABLE GRIP)
CABLE JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBERS OF CONDUCTORS [AWG]	4x8 AWG
TEMPERATURE RATING	-40°C to +60°C (-40°F to +140°F)
PROTECTION CLASS	IEC IP66, IP67

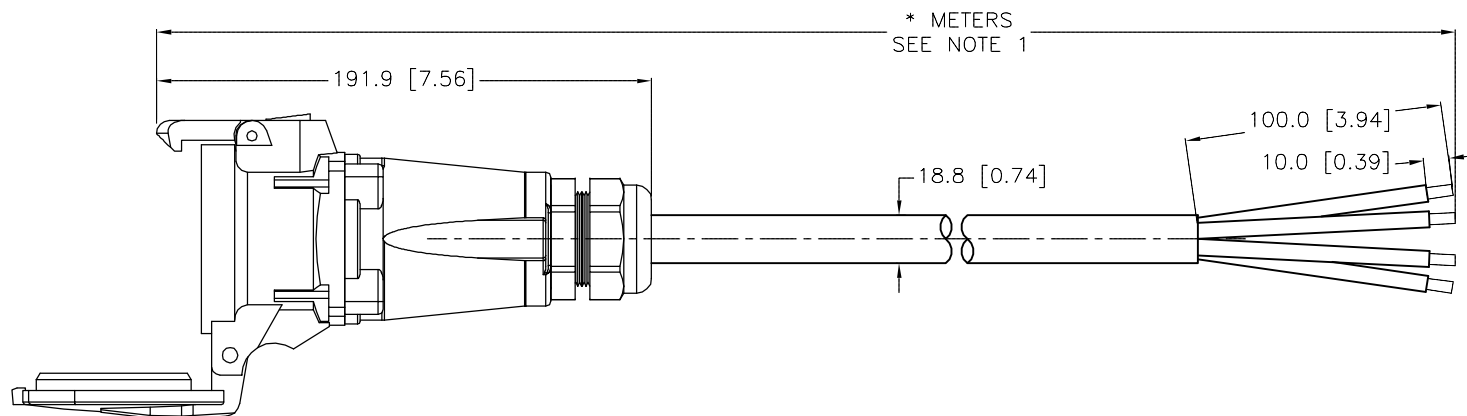

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION				THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.											
MATERIAL		DRFT		NF	DATE		06/10/15		DESCRIPTION LPK-3A-408-*		
SEE SPECIFICATIONS		APVD		L.H.		SCALE		1=3.0			
FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV B			
SEE SPECIFICATIONS										CONTACT TURCK FOR MORE INFORMATION	
				DO NOT SCALE THIS DRAWING		FILE: 777035271		SHEET		1 OF 1	