




MALE END VIEW



1 = BLACK
2 = RED
3 = WHITE
⊕ = GREEN/YELLOW

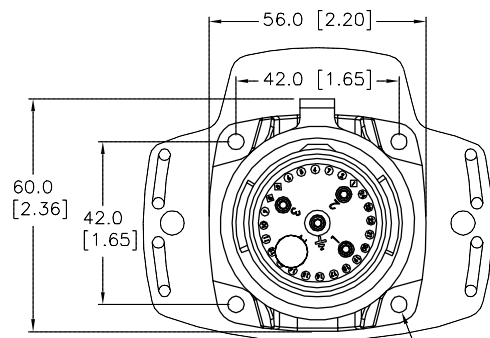

4XØ4.2 [Ø0.17]

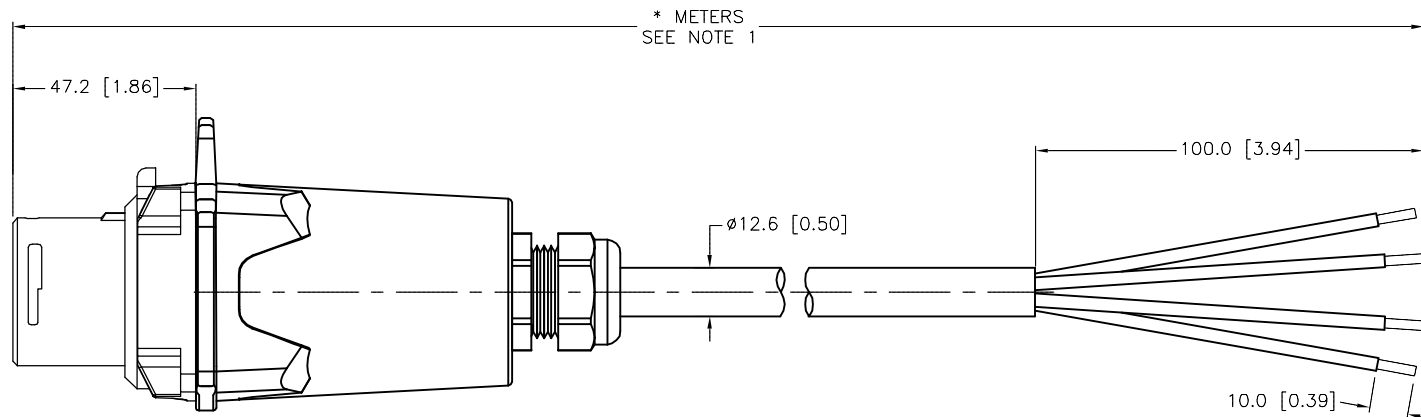

* METERS
SEE NOTE 1

SPECIFICATIONS


HOUSING MATERIAL/COLOR	PBT/BLUE
CONTACT MATERIAL/PLATING	NICKEL/SILVER
DRAWPLATE MATERIAL	PLASTIC
RATED CURRENT [A]	20 A
RATED VOLTAGE/MAX. VOLTAGE [VAC]	480 VAC/600 VAC
CABLE JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
CABLE GLAND MATERIAL	NYLON/BUNA-N (CABLE GRIP)
NUMBERS OF CONDUCTORS [AWG]	4x12 AWG
TEMPERATURE RATING	-40°C to +60°C (-40°F to +140°F)
PROTECTION CLASS	IEC IP66, IP67

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us TURCK			
							
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	NF	DATE	07/06/15	DESCRIPTION LPS-2A-42-*/D	
SEE SPECIFICATIONS		APVD	L.H.	SCALE	1=2.0		
FINISH		UNIT OF MEASUREMENT				IDENTIFICATION NO.	REV B
SEE SPECIFICATIONS		MILLIMETER [INCH]					
		DO NOT SCALE THIS DRAWING				FILE: 777035277	SHEET 1 OF 1

B	UPDATE GREEN CONDUCTOR TO GREEN/YELLOW	RDS	10/22/18	61043
REV	DESCRIPTION	BY	DATE	ECO NO.