



MALE END VIEW



1 = BLACK
2 = RED
3 = WHITE
⊕ = GREEN/YELLOW

SPECIFICATIONS

HOUSING MATERIAL	MATERIAL/COLOR	PBT/BLUE
CONTACT MATERIAL/PLATING	NICKEL/SILVER	
PROTECTIVE CAP MATERIAL	NEOPRENE	
RATED CURRENT [A]	40 A	
RATED VOLTAGE/MAX. VOLTAGE [VAC]	480 VAC/600 VAC	
CABLE GLAND MATERIAL	NYLON/BUNA-N (CABLE GRIP)	
OUTER CABLE JACKET MATERIAL/COLOR	TPE/BLACK	
CONDUCTOR INSULATION MATERIAL	PVC	
NUMBER OF CONDUCTORS [AWG]	4x8 AWG	
TEMPERATURE RANGE	-40°C to +60°C (-40°F to +140°F)	
PROTECTION CLASS	IEC IP66, IP67	

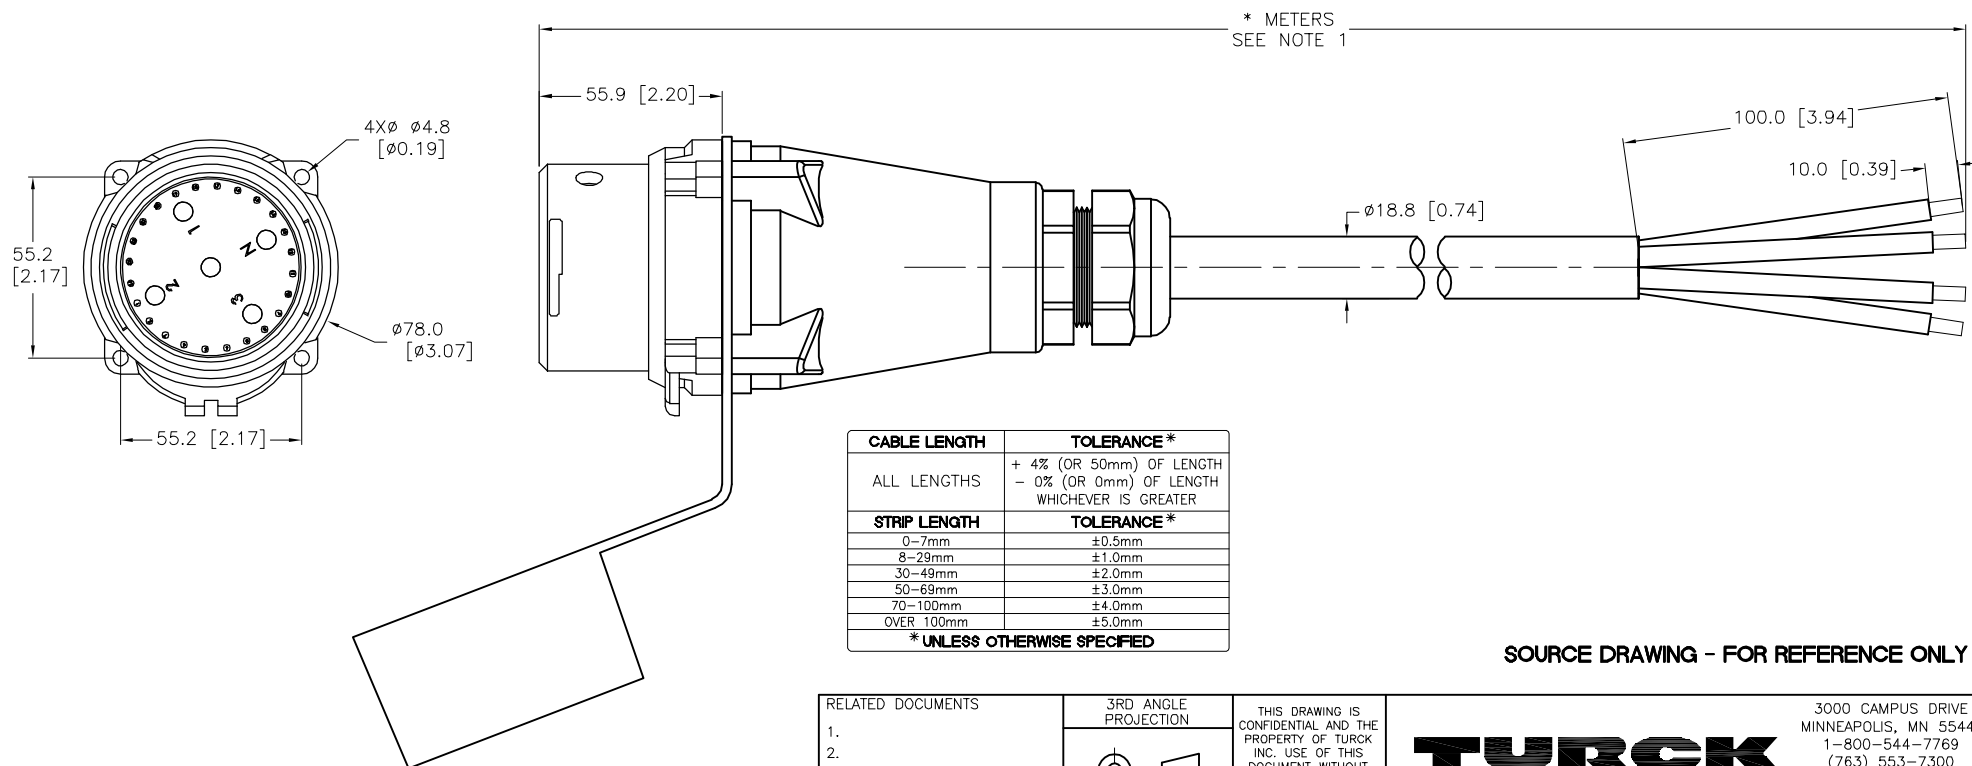


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

*UNLESS OTHERWISE SPECIFIED

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	NF	DATE	07/01/15	DESCRIPTION LPS-6A-408-*/C		
SEE SPECIFICATIONS		APVD	L.H.	SCALE	1=2.4			
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING						
	CONTACT TURCK FOR MORE INFORMATION					REV C		
		FILE: 777035299				SHEET 1 OF 4		

REV
C

FILE: 777035299

SHEET 1 OF 1