



MALE END VIEW



1 = BLACK
2 = RED
3 = WHITE
⊕ = GREEN/YELLOW

SPECIFICATIONS



HOUSING MATERIAL/COLOR	PBT/BLUE
CONTACT MATERIAL/PLATING	NICKEL/SILVER
DRAWPLATE MATERIAL	PLASTIC
PROTECTIVE CAP MATERIAL	NEOPRENE
RATED CURRENT [A]	20 A
RATED VOLTAGE/MAX. VOLTAGE [VAC]	480 VAC/600 VAC
CABLE JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
CABLE GLAND MATERIAL	NYLON/BUNA-N (CABLE GRIP)
NUMBERS OF CONDUCTORS [AWG]	4x12 AWG
TEMPERATURE RATING	-40°C to +60°C (-40°F to +140°F)
PROTECTION CLASS	IEC IP66, IP67

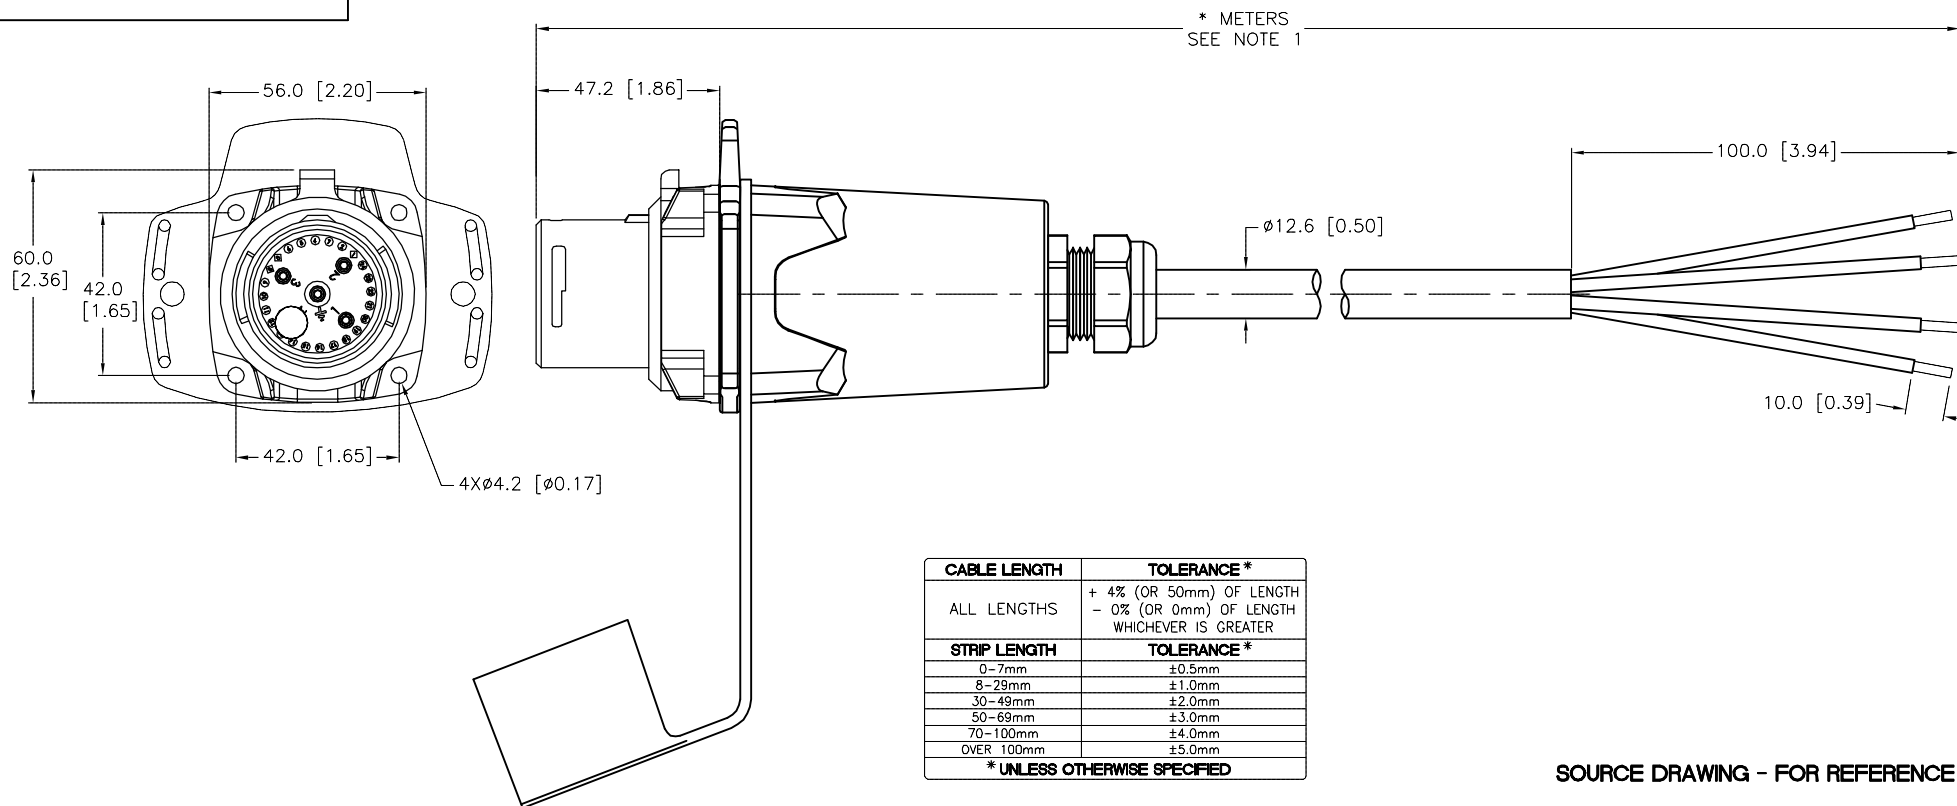

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT	NF	DATE	07/06/15	DESCRIPTION	LPS-2A-42-* /D/C
SEE SPECIFICATIONS			APVD	L.H.	SCALE	1=2.0		
FINISH			UNIT OF MEASUREMENT				IDENTIFICATION NO.	REV
SEE SPECIFICATIONS			MILLIMETER [INCH]					
			DO NOT SCALE THIS DRAWING				FILE: 777035301	SHEET 1 OF 1

B	UPDATE GREEN CONDUCTOR TO GREEN/YELLOW	RDS	10/22/18	61043
REV	DESCRIPTION	BY	DATE	ECO NO.